DEPARTMENT OF THE ARMY
US ARMY CORPS OF ENGINEERS
NEW ENGLAND DISTRICT
696 VIRGINIA ROAD
CONCORD MA 01742-2751

January 9, 2024

Regulatory Division
File Number: NAE-2022-00119

Mayor James Fiorentini
City of Haverhill
4 Summer Street
Haverhill, Massachusetts 01083
Sent by email: mayor@cityofhaverhill.com

Dear Mayor Fiorentini:

The U.S. Army Corps of Engineers (USACE) has reviewed your application for discharges of fill below the ordinary high water mark in order to remove the Little River Dam and restore the Little River through completing the following: dredging of 5,500 CY of sediment for targeted sediment cleanup to be disposed of in an upland location and 4,820 CY of sediment to be re-used within the project area, installation of fish passage structures, construction of low flow channel downstream of Winter Street Bridge, installation of bioengineered slope stabilization and scour protection, placement of native plantings. Recreational components include: constructing a canoe launch, fishing platform, pedestrian bridge, and trail network. See the attached information for a detailed project narrative and detailed impacts. Impacts are anticipated from the removal of Little River Dam, dewatering of a portion of Little River during construction, dredging and removal of contaminated sediment, grading of the former impoundment area, installation of a retaining wall and scour protection, and construction of the recreational improvements. Temporary impacts will total 90,183 square feet below the ordinary high water mark, permanent impacts will total 339,058 square feet below the ordinary high water mark. The project will also result in 315 square feet of permanent wetlands loss. This project is located in the Little River north of Winter Street, Haverhill, Massachusetts. The work is shown on the enclosed plans titled “LITTLE RIVER DAM REMOVAL AND RIVER RESTORATION,” on thirty eight (38) sheets, and dated “JUNE 30, 2022.”

Based on the information that you have provided, we verify that the activity is authorized under General Permit # 10 of the June 2, 2023, federal permit known as the Massachusetts General Permits (GPs). The GPs are available at https://www.nae.usace.army.mil/Missions/Regulatory/State-General-Permits/Massachusetts-General-Permit.

Please review the enclosed GPs carefully, in particular the general conditions beginning on page 35, and ensure that you and all personnel performing work authorized by the GPs are fully aware of and comply with its terms and conditions. A copy of the

GPs and this verification letter shall be available at the work site as required by General Condition 17. You must perform this work in compliance with the following special condition:

The work authorized herein shall not be conducted during the time of year (TOY) restriction of 1 March to 30 June of any year in order to minimize adverse impacts to anadromous fisheries.

This authorization expires on June 1, 2028. You must commence or have under contract to commence the work authorized herein by June 1, 2028, and complete the work by June 1, 2029. If not, you must contact this office to determine the need for further authorization and we recommend you contact us *before* the work authorized herein expires. Please contact us immediately if you change the plans or construction methods for work within our jurisdiction as we must approve any changes before you undertake them. Performing work within our jurisdiction that is not specifically authorized by this determination or failing to comply with the special condition(s) provided above or all the terms and conditions of the GPs may subject you to the enforcement provisions of our regulations.

This authorization does not obviate the need to obtain other federal, state, or local authorizations required by law. Applicants are responsible for applying for and obtaining any other approvals.

We continually strive to improve our customer service. To better serve you, we would appreciate your completing our Customer Service Survey located at https://regulatory.ops.usace.army.mil/customer-service-survey.

Please contact Christine Jacek of my staff at (978) 318-8026 or Christine.M.Jacek@usace.army.mil if you have any questions.

Sincerely,

Paul Maniccia

Paul Maniccia
Chief, Massachusetts Branch
Regulatory Division

Enclosures

cc:

Julianne Busa, Fuss & O'Neill, jbusa@fando.com
Ed Reiner, U.S. EPA, Region 1, Boston, MA, reiner.ed@epa.gov
Rachel Croy, U.S. EPA, Region 1, Boston, MA, croy.rachel@epa.gov
Kaitlyn Shaw, NMFS, Gloucester, MA; kaitlyn.shaw@noaa.gov
Jill Provencal, DEP NERO, Wetland and Waterways, Wilmington, MA; jill.provencal@state.ma.us
Kristin Divris, DEP NERO, Wetland and Waterways, Wilmington, MA; Kristin.Divris@mass.gov
Philip Di Pietro, DEP NERO, Wetland and Waterways, Wilmington, MA; philip.dipietro@mass.gov
David Wong, MassDEP, david.w.wong@mass.gov
David Robinson, MA Board of Underwater Archaeological Resources (BUAR); david.s.robinson@mass.gov
City of Haverhill Conservation Commission, conservation@cityofhaverhill.com

LITTLE RIVER DAM REMOVAL AND RIVER RESTORATION

HAVERHILL · MASSACHUSETTS

PRELIMINARY DESIGN DEVELOPMENT PLANS

JUNE 30, 2022

PREPARED FOR

CITY OF HAVERHILL
DEPT. OF PUBLIC WORKS
500 PRIMROSE STREET
HAVERHILL, MA 01830-2660

PREPARED BY

FUSS & O'NEILL
1550 MAIN STREET, SUITE 400
SPRINGFIELD, MA 01103
413.452.0445
www.fando.com

SHEET INDEX

PROJECT TEAM

MUNICIPAL VULNERABILITY PREPAREDNESS PROGRAM (MVP)
MASSACHUSETTS EXECUTIVE OFFICE OF ENERGY AND ENVIRONMENTAL AFFAIRS
SALTONSTALL BUILDING
100 CAMBRIDGE STREET SUITE 900
BOSTON, MA 02114
617.626.1000

O'REILLY, TALBOT & OKUN ENGINEERING ASSOCIATES
293 BRIDGE STREET SUITE 500
SPRINGFIELD, MA 01103
413.788.6222

TG & B MARINE SERVICES, INC.
P.O. BOX 767
NORTH FALMOUTH, MA 02556-0767
508.326.3685

LOCATION MAP
SCALE: 1" = 2,000'

COMMONWEALTH OF MASSACHUSETTS
DEAN E. AUDET
CIVIL
No. 46977
REGISTERED PROFESSIONAL ENGINEER

PROJ. No.: 20170390.U30
DATE: JUNE 2022

GI-001

LEGEND

EXIST	PROP	
		PROPERTY LINE/RIGHT-OF-WAY
		CENTERLINE
		LIMIT OF DISTURBANCE
		EASEMENT
		BASELINE
		GRAVEL ROAD
		EDGE OF PAVEMENT
		VERT. GRAN. CURB
		SAW CUT
		MATCH LINE
		FEMA FLOODWAY
		100-YEAR FLOOD ELEVATION
		500-YEAR FLOOD ELEVATION
A100		WETLAND DELINEATION FLAG
		BANK/MEAN ANNUAL HIGH WATER
		BORDERING VEGETATED WETLANDS
		25' NO DISTURBANCE ZONE
		50' NO BUILD ZONE
		100' BUFFER ZONE
		200' RIVERFRONT AREA
		BASE CONDITION FLOW LIMITS / MEAN ANNUAL LOW WATER
		LITTLE RIVER DAM
		EDGE OF WATER
		BUFFER ZONE
		GUARD RAIL
		STOCKADE FENCE
		WIRE FENCE
		CHAIN LINK FENCE
		TREE LINE
		SHRUB LINE
		STONE WALL
		RETAINING WALL
		MINOR CONTOUR
10		MAJOR CONTOUR
		BUILDING
		BOLLARD
		SIGN
		CONC. PAVEMENT
		NORMAL PAVEMENT
		HEAVY DUTY PAVEMENT
		ADA OR ACCESSIBLE RAMP
		HANDICAP PARKING
	VAN	VAN-ACCESSIBLE HANDICAP PARKING
		TOP OF SEDIMENT ELEVATION (DEPTH OF SEDIMENT) – APPROXIMATE FROM BOAT DEPTH MEASUREMENTS
		TOP OF SEDIMENT ELEVATION (FROM FIELD SURVEY)
		BOTTOM OF SEDIMENT ELEVATION (FROM FIELD SURVEY)
		GROUND OR BOTTOM OF RIVER SPOT ELEVATION (FROM FIELD SURVEY)
		SPOT ELEVATION w/LEADER
		IRON PIPE
		DRILL HOLE
	IP	IRON PIN
		MONUMENT
		CONTROL POINT
		WETLAND SEED MIX
		WETLAND SEED MIX AND LIVE STAKES
		CONSERVATION SEED MIX
		SUN-SHADE SEED MIX
		SHOWY WILDFLOWER SEED MIX
		UPLAND/PARK SEED MIX

EXIST	PROP	
		DRAIN/CSO LINE
	S	SEWER LINE
	E	OVERHEAD ELECTRIC, TELEPHONE & FIRE ALARM
	W	WATER LINE
	G	GAS LINE
	E	UNDERGROUND ELECTRIC
	T	TELEPHONE LINE
	C	CABLE TV
	E/T/C	ELECTRIC, TELEPHONE & CABLE TV LINES
	CB	CATCH BASIN
	DCB	DOUBLE CATCH BASIN
	DI	DRAIN INLET
	DMH	DRAIN MANHOLE
		HEADWALL
	SMH	SEWER MANHOLE
	CO	CLEAN OUT
		WATER MANHOLE
	WG	WATER GATE
		FIRE HYDRANT
		WATER METER
	PIV	POST INDICATOR VALVE
		WELL
	GG	GAS GATE
		GAS METER
		ELECTRIC MANHOLE
		ELECTRIC BOX
		ELECTRIC METER
		TRANSFORMER
		LIGHT POST
		TELEPHONE MANHOLE
	TS	TRAFFIC SIGNAL
		SIGNAL BOX
	FACP	FIRE ALARM CONTROL PANEL
	FA	FIRE ALARM BOX
		UTILITY POLE
		GUY POLE
		HAND HOLE
		PULL BOX
	SF	SILT FENCE
		BIODEGRADABLE COIR ROLLS
		TEMPORARY COFFERDAM
		CONSTRUCTION ENTRANCE/ TEMPORARY HAUL ROAD
		STAGING AREA
		TEMPORARY GRAVEL WALKWAY
		BASE CONDITION WATER LEVEL
		LOWER RIVER STABILIZATION
		UPPER RIVERBANK STABILIZATION
		GRAVEL WALKING TRAIL
		SCOUR POOL

LEGEND NOTE

SYMBOLS AND LEGENDS OF PROJECT FEATURES ARE GRAPHIC REPRESENTATIONS AND ARE NOT NECESSARILY SHOWN ON THE DRAWINGS TO SCALE OR TO THEIR ACTUAL DIMENSION OR LOCATION. COORDINATE DETAIL SHEET DIMENSIONS, MANUFACTURERS' LITERATURE, SHOP DRAWINGS, AND FIELD MEASUREMENTS OF SUPPLIED PRODUCTS FOR LAYOUT OF THE PROJECT FEATURES.

ABBREVIATIONS

GENERAL	
APPROX	APPROXIMATE
BIT	BITUMINOUS PAVEMENT
BW	BOTTOM OF WALL
CC	CONCRETE CURB
CCB	CAPE CODE BERM
ELEV	ELEVATION
EXIST	EXISTING
GC	GRANITE CURB
MAX	MAXIMUM
MIN	MINIMUM
NTS	NOT TO SCALE
PCC	PRECAST CONCRETE CURB
PROP	PROPOSED
R&D	REMOVE AND DISPOSE
R&R	REMOVE AND RESET
R&S	REMOVE AND STACK
TOS	TOP OF SLOPE
TW	TOP OF WALL
TYP	TYPICAL
VGC	VERTICAL GRANITE CURB
UTILITY	
CB	CATCH BASIN
CMP	CORRUGATED METAL PIPE
CPP	CORRUGATED POLYETHYLENE PIPE
DCB	DOUBLE CATCH BASIN
DI	DUCTILE IRON PIPE
F&G	FRAME AND GRATE
F&C	FRAME AND COVER
HDPE	HIGH DENSITY POLYETHYLENE
HYD	HYDRANT
INV	INVERT ELEVATION
PVC	POLYVINYL CHLORIDE PIPE
RCP	REINFORCED CONCRETE PIPE
RD	ROOF DRAIN
SMH	SEWER MANHOLE
TSV	TAPPING SLEEVE, VALVE AND BOX
UP	UTILITY POLE

MAP NOTES AND REFERENCES

1. REFERENCES:
   A. COMMONWEALTH OF MASSACHUSETTS DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR HIGHWAY AND BRIDGES, 2022 EDITION, REVISIONS AND ALL CURRENT ADDENDA, ARE MADE A PART HEREOF, AS IF ATTACHED HERETO. ALL REFERENCES TO "STATE STANDARD SPECIFICATIONS" SHALL REFER TO THE LATEST EDITION OF THE COMMONWEALTH OF MASSACHUSETTS DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR HIGHWAYS AND BRIDGES CONSTRUCTION.
   B. THE MASSACHUSETTS DEPARTMENT OF TRANSPORTATION CONSTRUCTION STANDARD DETAILS, 2017 EDITION, AND ALL CURRENT REVISIONS, ARE MADE A PART HEREOF, AS IF ATTACHED HERETO.
   C. THE MASSACHUSETTS EROSION AND SEDIMENT CONTROL GUIDELINES FOR URBAN AND SUBURBAN AREAS, 2013 EDITION, REVISIONS AND ALL CURRENT ADDENDA, ARE MADE A PART HEREOF, AS IF ATTACHED HERETO. ALL REFERENCES TO "SOIL EROSION AND SEDIMENT CONTROL HANDBOOK" SHALL REFER TO THE LATEST EDITION OF THE MASSACHUSETTS EROSION AND SEDIMENT CONTROL GUIDELINES FOR URBAN AND SUBURBAN AREAS.
2. EXISTING CONDITIONS:
   A. SURVEY: CONTOURS SHOWN ON THIS PLAN THAT ARE OUTSIDE OF THE RIVER AND CASHMAN PARK AREA ARE APPROXIMATE ONLY AND WERE OBTAINED FROM 2013–2014 USGS LIDAR DATA OBTAINED FROM NOAA'S ONLINE DATA ACCESS VIEWER. TOPOGRAPHY WITHIN CASHMAN PARK, BATHYMETRIC SPOT ELEVATIONS (WITHIN THE RIVER), AND SEDIMENT DEPTHS (WITHIN THE RIVER) WERE OBTAINED FROM THE FOLLOWING COMBINATION OF FIELD INVESTIGATIONS AND RESEARCH:
   A.A. ELEVATIONS SHOWN WITHIN RIVER WITH ASTERISKS ARE APPROXIMATE AND WERE OBTAINED ON NOVEMBER 6, 2020 AND ON NOVEMBER 17, 2020 FROM DEPTH MEASUREMENTS TAKEN BY BOAT BY FUSS & O'NEILL AND TOAN MARINE SERVICES, INC.
   A.B. ELEVATIONS IN RIVER AND AT WINTER STREET THAT DO NOT INCLUDE ASTERISKS WERE OBTAINED FROM ACTUAL FIELD SURVEY PERFORMED BY FUSS & O'NEILL IN FALL OF 2021 AND WINTER OF 2022. ELEVATION WITH "T" DESIGNATION REFERS TO TOP OF SEDIMENT ELEVATION; ELEVATION WITH "B" DESIGNATION REFERS TO BOTTOM OF SEDIMENT. ELEVATIONS THAT DO NOT HAVE ASTERISKS OR "T" OR "B" DESIGNATION WERE ALSO OBTAINED FROM ACTUAL FIELD SURVEY.
   A.C. ELEVATION AND WETLANDS DATA WITHIN CASHMAN PARK WAS OBTAINED FROM AN EXISTING CONDITIONS SURVEY PLAN OF CASHMAN PARK, DATED JUNE 1, 2017, AND PREPARED BY EMC SURVEYING AND MAPPING CONSULTANTS.
   B. TOPOGRAPHIC INFORMATION (CONTOURS), BUILDING FOOTPRINTS, EXISTING FEATURES SHOWN OUTSIDE OF THE PROJECT'S RIGHTS OF WAY ARE APPROXIMATE ONLY AND WERE OBTAINED FROM A COMBINATION OF 2013–2014 USGS CMGP LIDAR DATA (OBTAINED FROM NOAA'S ONLINE DATA ACCESS VIEWER) AND MASSGIS DATA LAYER.
   C. WETLAND FLAGGING ALONG LITTLE RIVER WITHIN THE DIRECT PROJECT LIMITS WAS PERFORMED BY FUSS & O'NEILL, INC. (MICHAEL SOARES, WETLAND SCIENTIST) ON SEPTEMBER 27, 2021 AND APRIL 28, 2022. THE WETLAND FLAGS WERE THEN LOCATED VIA SUB-METER GPS. DUE TO SPECIFIC SITE RESTRICTIONS OR SAFETY CONCERNS, IT WAS NOT POSSIBLE TO ACCESS AND FIELD-DELINEATE SOME SEGMENTS OF RIVERBANK AND BORDERING WETLANDS. IN LOCATIONS WHERE A TYPICAL FIELD DELINEATION OF THE BANK, LUWW, AND/OR BVW WAS NOT PRACTICABLE, BOUNDARIES OF RESOURCE AREAS BETWEEN FIELD DELINEATED SEGMENTS WERE COMPLETED IN GIS THROUGH A REVIEW OF AERIAL IMAGERY (2014–2021, SPRING AND SUMMER), FEDERAL AND STATE WETLANDS MAPPING (NATIONAL WETLANDS INVENTORY AND MASS DEP, RESPECTIVELY), AND 1-FOOT CONTOURS (DERIVED FROM 2013–2014 LIDAR). STATE-REGULATED RIVERFRONT AREA IS MEASURED HORIZONTALLY FROM BANK OF LITTLE RIVER, AND STATE-REGULATED BUFFER ZONE IS MEASURED HORIZONTALLY FROM THE BOUNDARIES OF BVW IDENTIFIED AT THE SITE.
   D. ASSESSOR'S PARCELS, WETLAND BOUNDARIES (UPSTREAM OF THE MBTA BRIDGE AND THE PROJECT'S LIMIT OF DIRECT IMPACTS), POTENTIAL & CERTIFIED VERNAL POOLS, SHOWN ON THESE PLANS ARE APPROXIMATE AND WERE OBTAINED FROM MASSACHUSETTS GEOGRAPHIC INFORMATION SYSTEM (MASSGIS).
3. FLOOD ZONE:
   A. SPECIAL FLOOD HAZARD AREAS (SFHAS), INCLUDING FLOODWAY INFORMATION, SHOWN ON THIS PLAN WERE INITIALLY OBTAINED FROM FEMA FLOOD INSURANCE RATE MAP (FIRM) PANEL NUMBER 25009C0086G WITH AN EFFECTIVE DATE OF JULY 19, 2018 AND FIRM PANEL NUMBERS 25009C0087F, 25009C0089F, AND 25009C0078F WITH AN EFFECTIVE DATE OF JULY 3, 2012 FOR ESSEX COUNTY, MASSACHUSETTS. THESE FLOOD HAZARD AREAS WERE THEN MODIFIED BASED ON THE RESULTS OF MORE DETAILED TOPOGRAPHY AND A PRE-CONDITIONS (OR PRE-DAM REMOVAL) HYDRAULIC ANALYSES PERFORMED BY FUSS & O'NEILL USING HEC-RAS. IN ORDER TO ASSESS ANTICIPATED HYDRAULIC IMPACTS AS A RESULT OF THE PROPOSED REMOVAL OF THE DAM, A POST-CONDITIONS (OR POST-DAM REMOVAL) HYDRAULIC ANALYSES WAS ALSO PERFORMED BY FUSS & O'NEILL USING HEC-RAS. THE MODIFIED PRE-CONDITIONS SPECIAL FLOOD AREA BOUNDARIES ARE REFLECTED ON THE EXISTING CONDITIONS PLANS. THE POST-CONDITIONS (OR POST-DAM REMOVAL) SPECIAL FLOOD AREA BOUNDARIES ARE REFLECTED ON THE SITE LAYOUT AND GRADING PLANS.
4. NATURAL HERITAGE DATA:
   THERE ARE NO NHESP PRIORITY HABITATS OF RARE SPECIES, ESTIMATED HABITATS OF RARE WILDLIFE, OR NATURAL COMMUNITIES LOCATED ALONG THE LITTLE RIVER. THERE ARE ALSO NO AREAS OF CRITICAL ENVIRONMENTAL CONCERN ALONG LITTLE RIVER. THERE ARE, HOWEVER, POTENTIAL VERNAL POOLS LOCATED ALONG LITTLE RIVER TO THE SOUTH OF THE RIVER'S CROSSING WITH I-495 AND NORTH OF THE RIVER'S RAILROAD BRIDGE CROSSING. THESE POTENTIAL VERNAL POOLS WERE OBTAINED FROM MASSGIS.
5. UTILITIES:
   UTILITIES SHOWN ON THIS PLAN WERE APPROXIMATED FROM FIELD OBSERVATIONS AND A COLLECTIVE REVIEW OF THE FOLLOWING DOCUMENTS: (1) WINTER STREET AND HALE STREET SEWER DIVERSION PLAN PREPARED BY METCALF & EDDY (DATED JULY 1937), (2) FLOOD PROTECTION SYSTEM IMPROVEMENT PLANS (CWSRF-3062, IFBO20-13) PREPARED BY AECOM (DATED FEBRUARY 14, 2013), AND (3) INTEGRATED FINAL COMBINED SEWER OVERFLOW LONG-TERM CONTROL PLAN AND SUPPLEMENTAL ENVIRONMENTAL IMPACT REPORT PREPARED BY CDM SMITH (DATED FEBRUARY 2017).
6. ACTIVITY AND USE LIMITATION AREAS AND UNDERGROUND STORAGE TANKS:
   ALL PROPERTIES WHERE WORK IS PROPOSED DO NOT HAVE UNDERGROUND STORAGE TANKS. HOWEVER, PARCEL 616-304-1 (83 LAFAYETTE SQUARE) IS CONSIDERED AN AUL (ACTIVITY AND USE LIMITATION) PROPERTY.

GENERAL CONSTRUCTION AND COORDINATION REQUIREMENTS

1. THE CONTRACTOR SHALL VERIFY THE LOCATION OF THE EXISTING DAM TO BE REMOVED, EXISTING ADJACENT STRUCTURES, AND THE PROPOSED LAYOUT OF THE RIVER CHANNEL IMPROVEMENTS WITH ITS RELATIONSHIP TO THE EXISTING SITE SURVEY. THE CONTRACTOR SHALL ALSO VERIFY ALL DIMENSIONS, SITE CONDITIONS, AND MATERIAL SPECIFICATIONS AND SHALL NOTIFY THE OWNER AND ENGINEER OF ANY ERRORS, OMISSIONS OR DISCREPANCIES BEFORE COMMENCING OR PROCEEDING WITH WORK.
2. THE CONTRACTOR SHALL TAKE FIELD MEASUREMENTS AS REQUIRED TO FIT THE WORK PROPERLY. RECHECK MEASUREMENTS BEFORE CONSTRUCTING EACH WORK ITEM. WHERE PORTIONS OF THE WORK ARE INDICATED TO FIT TO OTHER CONSTRUCTION, VERIFY DIMENSIONS OF OTHER CONSTRUCTION BY FIELD MEASUREMENTS BEFORE FABRICATION. COORDINATE FABRICATION SCHEDULE WITH CONSTRUCTION PROGRESS TO AVOID DELAYING THE WORK.
3. THE LOCATION OF EXISTING UTILITIES ARE APPROXIMATE, HAVE BEEN PLOTTED FROM THE LATEST AVAILABLE INFORMATION, AND MAY NOT BE ALL INCLUSIVE. THE CONTRACTOR SHALL CHECK AND VERIFY THE LOCATIONS OF ALL EXISTING UTILITIES, BOTH OVERHEAD AND UNDERGROUND, AND "DIG-SAFE" MUST BE NOTIFIED PRIOR TO COMMENCING ANY CONSTRUCTION OPERATIONS. RESTORATION AND REPAIR OF DAMAGE TO EXISTING UTILITIES SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR WITH NO ADDITIONAL COST TO THE OWNER. NO EXCAVATION SHALL COMMENCE UNTIL ALL INVOLVED UTILITY COMPANIES AND/OR TOWN WHOSE FACILITIES MIGHT BE AFFECTED BY ANY WORK TO BE PERFORMED BY THE CONTRACTOR ARE NOTIFIED AT LEAST 72 HOURS IN ADVANCE. RELOCATION OF ANY UTILITIES SHALL BE AT THE OWNERS EXPENSE AND COMPLETED WITH THE UTILITY WORK. THE OWNER SHALL BE NOTIFIED AS TO THE RELOCATIONS REQUIRED PRIOR TO THE START OF CONSTRUCTION.
4. DEVIATIONS OR CHANGES FROM THESE PLANS WILL NOT BE ALLOWED UNLESS APPROVED BY THE ENGINEER/CONTRACT OWNER.
5. THE CONTRACTOR SHALL MAKE EXPLORATORY EXCAVATIONS AND LOCATE ANY EXISTING UTILITIES SUFFICIENTLY AHEAD OF CONSTRUCTION TO PERMIT REVISIONS TO PLANS IF NECESSARY. HOWEVER, EXPLORATORY EXCAVATIONS AND OTHER ACTIVITIES INVOLVING SOIL DISTURBANCES WITHIN THE RIVER OR OTHER ADJACENT WATERCOURSES SHALL BE LIMITED TO THE LOW-FLOW PERIOD (I.E. THE PERIOD FROM JULY 1 TO OCTOBER 31 OF ANY CALENDAR YEAR).
6. THE EXISTENCE AND/OR LOCATION OF UTILITIES SHOWN ON THESE PLANS MAY BE ONLY APPROXIMATELY CORRECT AND THE CONTRACTOR IS REQUIRED TO TAKE PRECAUTIONARY MEASURES TO PROTECT THE UTILITIES SHOWN HEREON AND ANY OTHER EXISTING UTILITIES NOT OF RECORD OR NOT SHOWN ON THESE PLANS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING, AT HIS/HER EXPENSE, ANY EXISTING UTILITIES DAMAGED DURING CONSTRUCTION.
7. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REPLACING, WITH MATCHING MATERIALS, ANY PAVEMENT, WALKS, CURBS, WALLS, FENCES, ETC., THAT MUST BE CUT OR THAT ARE DAMAGED DURING CONSTRUCTION.
8. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL REMAINING NECESSARY PERMITS, INSPECTIONS, BONDS, ETC. AND OTHER APPROVAL RELATED ITEMS WITH THE LOCAL AND STATE/FEDERAL MUNICIPALITIES. NO CONSTRUCTION SHALL COMMENCE UNTIL SUCH PERMITS HAVE BEEN SECURED AND THE CONTRACTOR HAS SUPPLIED THE REQUIRED NOTICES.
9. WORK ON MBTA PROPERTY CAN ONLY BE UNDERTAKEN UPON RECEIPT OF A LICENSE FROM MBTA.
10. AN APPROVED SET OF PLANS AND ALL APPLICABLE PERMITS MUST BE AVAILABLE AT THE SITE THROUGH THE ENTIRE PERIOD OF CONSTRUCTION WHEN WORK IS ACTIVELY OCCURING.
11. CONTRACTOR AGREES THAT HE/SHE SHALL ASSUME SOLE AND COMPLETE RESPONSIBILITY FOR JOB SITE CONDITIONS DURING THE COURSE OF CONSTRUCTION OF THIS PROJECT, INCLUDING SAFETY OF ALL PERSONS AND PROPERTY; THAT THIS REQUIREMENT SHALL APPLY CONTINUOUSLY AND NOT BE LIMITED TO NORMAL WORKING HOURS; AND THAT THE CONTRACTOR SHALL DEFEND, INDEMNIFY AND HOLD THE CONTRACT OWNER (CITY OF HAVERHILL), PROPERTY OWNERS AND THE ENGINEER HARMLESS FROM ANY AND ALL LIABILITY, REAL AND ALLEGED, IN CONNECTION WITH THE PERFORMANCE OF WORK ON THIS PROJECT, EXCEPTING FOR LIABILITY ARISING FROM "THE SOLE NEGLIGENCE OF THE CONTRACT OWNER, PROPERTY OWNER OR THE ENGINEER."
12. PHOTOGRAPHS, VIDEOTAPING, AND SKETCHES (AS NECESSARY) MUST BE TAKEN OF ADJOINING CONSTRUCTION AND SITE IMPROVEMENTS WITHIN 200 FEET OF EXCAVATION LIMITS ASSOCIATED WITH THE DAM REMOVAL AND RIVER CHANNEL IMPROVEMENTS PRIOR TO EXCAVATION AND THE INSTALLATION OF EXCAVATION SUPPORT SYSTEMS. SUCH DOCUMENTATION SHALL ILLUSTRATE EXISTING SURFACES THAT MAY BE MISCONSTRUED AS DAMAGE CAUSED BY THIS PROJECT CONSTRUCTION OPERATIONS.
13. METHODS AND MATERIALS USED IN THE CONSTRUCTION OF IMPROVEMENTS FOR THIS PROJECT SHALL CONFORM TO THE CURRENT CONSTRUCTION STANDARDS AND SPECIFICATIONS OF THE CITY OF HAVERHILL AND THE MASSACHUSETTS DEPARTMENT OF TRANSPORTATION.
14. VERIFY SPACE REQUIREMENTS AND DIMENSIONS OF ITEMS SHOWN ON DRAWINGS. CHECK THE LOCATION, LEVEL AND GRADE, OF EVERY MAJOR ELEMENT AS THE WORK PROGRESSES.
15. ESTABLISH BENCHMARKS AND CONTROL POINTS IN ADDITION TO THOSE INDICATED TO SET LINES, GRADES, AND LEVELS AT EACH STAGE OF CONSTRUCTION. LOCATE THE WORK AND COMPONENTS OF THE WORK ACCURATELY, IN CORRECT ALIGNMENT AND ELEVATION. AS INDICATED BOUNDS OR MONUMENTATION DISTURBED DURING CONSTRUCTION SHALL BE SET OR RESET BY A PROFESSIONAL LICENSED SURVEYOR AT NO COST TO THE OWNER.
16. COMPLY WITH MANUFACTURERS' WRITTEN INSTRUCTIONS AND RECOMMENDATIONS FOR INSTALLING MATERIALS AND PRODUCTS. INSTALL PRODUCTS AT THE TIME AND UNDER CONDITIONS THAT WILL ENSURE THE BEST POSSIBLE RESULTS. MAINTAIN CONDITIONS REQUIRED FOR PRODUCT PERFORMANCE UNTIL SUBSTANTIAL COMPLETION.
17. USE PRODUCTS, CLEANERS, AND INSTALLATION MATERIALS THAT ARE NOT CONSIDERED HAZARDOUS.
18. CONTRACTOR SHALL IDENTIFY TREES TO BE REMOVED PRIOR TO CONSTRUCTION AND MARK THEM WITH CONSTRUCTION TAPE FOR REVIEW BY THE OWNER/ENGINEER. TREES AND OTHER EXISTING VEGETATION SHALL BE RETAINED WHEREVER FEASIBLE. CONTRACTOR SHALL NOT REMOVE TREES UNTIL REVIEWED AND APPROVED BY THE OWNER/ENGINEER.
19. THE CONTRACTOR SHALL RESTORE DISTURBED LANDSCAPE AREAS TO ORIGINAL CONDITION (I.E. SEEDED, SODDED, PLANTED), UNLESS OTHERWISE DIRECTED WITHIN CONTRACT DOCUMENTS.
20. ALL EXCESS EXCAVATED MATERIALS, EXCESS FILL, EXCESS CONSTRUCTION MATERIALS, DEBRIS, AND WASTE (INCLUDING IDENTIFIED CONTAMINATED SOILS WITHIN RIVER) SHALL BE REMOVED FROM THE SITE AND SHALL BE DISPOSED OF IN ACCORDANCE WITH APPLICABLE LAWS.
21. DO NOT CLOSE OR OBSTRUCT ROADWAYS, SIDEWALKS, FIRE HYDRANTS, AND UTILITIES WITHOUT APPROPRIATE PERMITS.
22. WORK IS RESTRICTED TO THE HOURS OF 7 AM TO 5 PM ON MONDAY THROUGH FRIDAY, EXCLUDING HOLIDAYS, UNLESS OTHERWISE APPROVED BY THE OWNER.
23. PRIOR TO CONSTRUCTION, ADDITIONAL CONSTRUCTION ACCESSES AND/OR CONSTRUCTION EASEMENTS NOT SHOWN ON THIS PLAN (AGREED UPON THROUGH COORDINATION BETWEEN CONTRACTOR AND PROPERTY OWNER) MUST BE GRANTED IN WRITING BY PROPERTY OWNERS.
24. STOP WORK IN THE VICINITY OF SUSPECTED CONTAMINATED SOIL, GROUNDWATER, OR OTHER MEDIA OUTSIDE OF THE AREA OF CONTAMINATED SOIL AREA IDENTIFIED WITHIN. IMMEDIATELY NOTIFY THE ENGINEER AND OWNER SO THAT APPROPRIATE TESTING AND SUBSEQUENT ACTION CAN BE TAKEN. RESUME WORK IN THE IMMEDIATE VICINITY ONLY UPON DIRECTION BY THE OWNER.

PROTECTION OF WORK REQUIREMENTS

1. THE WORK AND SITE SHALL BE PROTECTED AT ALL TIMES UNTIL FINAL ACCEPTANCE BY THE OWNER. CARE SHALL BE EXERCISED WHILE OPERATING EQUIPMENT ON, AND ADJACENT TO, THE WORK AREA. THE CONTRACTOR SHALL BE RESPONSIBLE TO ASSURE THE UTILIZED EQUIPMENT DOES NOT CAUSE DAMAGE TO EXISTING AND ADJACENT FEATURES NOT SCHEDULED FOR DEMOLITION OR REMOVAL.
2. ACCESS TO VARIOUS PORTIONS OF THE SITE SHALL BE UNDERTAKEN IN SUCH A MANNER THAT THE WORK AND SITE ARE PROTECTED AT ALL TIMES. ACCESS WAYS SHALL BE CONSTRUCTED, MAINTAINED, AND PROTECTED WITH SEDIMENT CONTROLS TO PREVENT DAMAGE FROM EROSION DURING MAJOR STORM EVENTS.
3. PLACEMENT AND COMPACTION OF FILL MATERIALS SHALL BE COMPLETED IN ACCORDANCE WITH THE PROJECT MANUAL AND IN SUCH A MANNER THAT THE WORK AND ADJACENT PROPERTIES ARE PROTECTED FROM DAMAGE AT ALL TIMES.
4. CONSTRUCT IN-RIVER IMPROVEMENTS AND MAINTAIN IN-RIVER WORK AREAS IN ACCORDANCE WITH THE PROJECT'S APPROVED WATER CONTROL & CONSTRUCTION SEQUENCING PLANS. IN THE EVENT THAT FLOOD FLOWS ARE EXPECTED TO EXCEED THE ELEVATIONS OF THE PROPOSED TEMPORARY RIVER CROSSINGS AND COFFERDAM SYSTEMS: PROTECT ANY NON-STABLE OR ERODIBLE IMPROVEMENTS USING APPROPRIATELY SIZED STONE RIPRAP MATERIAL (OR SIMILAR) AND REMOVE ALL EQUIPMENT AND PERSONNEL FROM IN-RIVER LOCATIONS.

EROSION AND SEDIMENT CONTROL

1. PRIOR TO THE COMMENCEMENT OF CONSTRUCTION ACTIVITIES, INSTALL ALL EROSION AND SEDIMENT CONTROL DEVICES AS SHOWN ON THE PLAN OR AS REQUIRED BY SITE CONDITIONS. ALL EROSION CONTROL DEVICES WILL BE MAINTAINED THROUGHOUT CONSTRUCTION.
2. DISTURBANCE OF SOIL SURFACES IS REGULATED BY STATE LAW AND LOCAL ORDINANCE. ALL WORK SHALL COMPLY WITH THESE EROSION AND SEDIMENT CONTROL NOTES AND OTHER PERMIT CONDITIONS TO PREVENT OR MINIMIZE SOIL EROSION AND SEDIMENTATION TO OFF-SITE AREAS.
3. THE CONTRACTOR SHALL COMPLY WITH THE LATEST EDITION OF THE "MASSACHUSETTS EROSION AND SEDIMENT CONTROL GUIDELINES FOR URBAN AND SUBURBAN AREAS" IN CONSTRUCTING THE EROSION AND SEDIMENT CONTROLS INDICATED ON THE PLANS. ALL EROSION AND SEDIMENT CONTROL MEASURES OR WORKS AND REHABILITATION MEASURES MUST CONFORM TO OR EXCEED THE SPECIFICATIONS OR STANDARDS SET OUT IN THIS DOCUMENT.
4. THE CONTRACTOR IS RESPONSIBLE FOR THE TIMELY INSTALLATION, INSPECTION, MAINTENANCE, AND/OR REPLACEMENT OF ALL TEMPORARY AND PERMANENT EROSION CONTROL DEVICES SHOWN ON THESE PLANS TO ENSURE PROPER OPERATION THROUGHOUT THE LIFE OF THE PROJECT. REMOVE EROSION AND SEDIMENTATION CONTROLS AFTER STABLE VEGETATIVE GROWTH IS ESTABLISHED BY THE OWNER, ENGINEER OR LANDSCAPE ARCHITECT.
5. THE CONTRACTOR SHALL INSPECT EROSION AND SEDIMENT CONTROL DEVICES ON A WEEKLY BASIS, AFTER EACH STORM EVENT, AND AT LEAST DAILY DURING PROLONGED RAINFALL. CLEAN OUT ACCUMULATED SEDIMENT BEHIND CONTROLS. REPAIR OR REPLACE CONTROLS PROMPTLY AS NEEDED. REMOVE ACCUMULATED SEDIMENT FROM BEHIND PERIMETER CONTROLS (I.E. BIODEGRADABLE COIR ROLLS AND SILT FENCING) WHEN ONE-THIRD OF THE ORIGINAL HEIGHT OF THE CONTROLS BECOME FILLED WITH SEDIMENT. DISPOSE OF REMOVED SEDIMENT IN ON-SITE FILL AREAS OR LAWFULLY OFF-SITE.
6. TREES AND OTHER EXISTING VEGETATION NOT WITHIN THE LIMITS OF DISTURBANCE SHALL BE PROTECTED FROM DAMAGE. VEGETATED AREAS AND/OR TREES DAMAGED THAT ARE NOT PLANNED FOR REMOVAL SHALL BE RESTORED TO THEIR ORIGINAL CONDITION OR BETTER TO THE SATISFACTION OF THE CITY.
7. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO CLEAN ROADS, CONTROL DUST, AND TAKE ALL NECESSARY MEASURES TO ENSURE THAT THE SITE AND ALL ADJACENT ROADS AND PARKING AREAS BE MAINTAINED IN A MUD- AND DUST-FREE CONDITION AT ALL TIMES THROUGHOUT THE LIFE OF THE CONTRACT. DUST CONTROL SHALL INCLUDE, BUT IS NOT LIMITED TO, WATER AND/OR CRUSHED STONE OR COARSE GRAVEL.
8. ALL PROPOSED TEMPORARY STONE CONSTRUCTION ENTRANCES SHALL BE CONSTRUCTED AS SHOWN ON THE PLANS AND DETAILS. ALL VEHICLE TRAFFIC ENTERING OR EXITING THE PROJECT SITE SHALL PASS OVER THE CONSTRUCTION ENTRANCES TO REDUCE THE TRACKING OR FLOWING OF SEDIMENT ONTO THE SURROUNDING ROADWAYS. ENTRANCES SHALL BE MAINTAINED IN A CONDITION THAT WILL PREVENT TRACKING OR FLOWING OF SEDIMENT ONTO THE SURROUNDING ROADWAYS. THIS WILL REQUIRE PERIODIC TOP DRESSING WITH ADDITIONAL STONE OR ADDITIONAL LENGTH AS CONDITIONS DEMAND AND REPAIR AND/OR CLEANOUT OF ANY MEASURES USED TO TRAP SEDIMENT. ALL SEDIMENT SPILLED, DROPPED, WASHED, OR TRACKED ONTO THE SURROUNDING ROADWAYS AND PARKING AREAS MUST BE REMOVED IMMEDIATELY. ADDITIONAL ENTRANCES FOR CONSTRUCTION PHASING SHALL BE INSTALLED AS REQUIRED TO PREVENT TRACKING OR FLOWING OF SEDIMENT ONTO ROADWAYS.
9. THE CONTRACTOR SHALL INSTALL ALL PERIMETER SEDIMENT CONTROL BARRIERS (I.E. SILT FENCE) AS SHOWN ON THE PLANS. A SILT FENCE SHALL ALSO BE INSTALLED AROUND ANY SOIL STOCKPILE AREAS.
10. TEMPORARY VEGETATIVE COVER SHALL BE ESTABLISHED IMMEDIATELY IN ANY DISTURBED AREAS THAT HAVE NOT YET REACHED FINISHED GRADE AND CONSTRUCTION IS NOT EXPECTED TO RESUME FOR MORE THAN 14 DAYS. TEMPORARY VEGETATIVE COVER SHALL CONSIST OF SHORT-TERM EROSION CONTROL SEED (SUBSECTION M6.03.1 OF THE MASSDOT STANDARD SPECIFICATIONS) FROM APRIL 1 TO JUNE 1 AND AUGUST 15 TO OCTOBER 15. MAY ALSO BE INSTALLED BETWEEN OCTOBER 15 TO MARCH 31 IF COVERED WITH TEMPORARY MULCHING. SEED AT A RATE OF 75 LBS/ACRE BY HAND.
11. PERMANENT VEGETATIVE COVER SHALL BE ESTABLISHED TO ALL DISTURBED AREAS THAT HAVE REACHED FINISHED GRADE AS SOON AS POSSIBLE, BUT NOT MORE THAN 14 DAYS AFTER THE CONSTRUCTION ACTIVITY IN THAT AREA HAS PERMANENTLY CEASED. RECOMMENDED PERMANENT SEEDING DATES ARE APRIL 1 TO JUNE 1 AND AUGUST 15 TO OCTOBER 15. REFER TO RESTORATION PLANS FOR PERMANENT VEGETATIVE COVER SEED MIXTURES AND APPLICATION RATES. ALL PLANTINGS AND SEED SHALL BE COVERED BY A ONE-YEAR WARRANTY PERIOD; RESEEDING/RE-PLANTING SHALL BE COMPLETED TO ENSURE STABLE VEGETATIVE COVER IS ESTABLISHED OVER ALL DISTURBED AREAS.
12. IF PERMANENT SEEDING CANNOT BE COMPLETED WITHIN 14 DAYS OF THE COMPLETION OF CONSTRUCTION OR WITHIN THE RECOMMENDED SEEDING DATES, TEMPORARY BIODEGRADABLE EROSION CONTROL BLANKETING (CONTAINING NO PLASTIC COMPONENTS) OR MULCHING SHALL BE SPREAD/INSTALLED OVER ALL DISTURBED AREAS TO PROTECT THE SITE UNTIL ARRIVAL OF THE NEXT RECOMMENDED SEEDING PERIOD. MULCHING OR BLANKETING SHOULD BE INSTALLED AS SOON AS POSSIBLE IF SEEDING IS INSTALLED BETWEEN OCTOBER 15 AND MARCH 31, BUT NOT MORE THAN 14 DAYS AFTER THE CONSTRUCTION ACTIVITY IN THAT AREA HAS TEMPORARILY CEASED. IF PERMANENT SEEDING IS INSTALLED IN JULY AND AUGUST, APPLY WATER TO SEEDED AREAS ON A DAILY BASIS.
13. BLANKETING OR MULCHING MUST BE INSPECTED PERIODICALLY, IN PARTICULAR AFTER RAINSTORMS, TO CHECK FOR RILL EROSION. WHERE EROSION IS OBSERVED, ADDITIONAL MULCH MUST BE APPLIED OR BLANKETING REPAIRED OR REPLACED. INSPECTIONS SHALL TAKE PLACE UNTIL VEGETATION IS THOROUGHLY ESTABLISHED.
14. INSPECT PERMANENT TURF REINFORCEMENT MATTING AT LEAST ONCE A WEEK AND WITHIN 24 HOURS OF THE END OF A STORM WITH A RAINFALL AMOUNT OF 0.5 INCH OR GREATER FOR FAILURES UNTIL THE TURF HAS BECOME ESTABLISHED. MAT FAILURE HAS OCCURRED WHEN SOILS AND/OR SEED HAVE WASHED AWAY FROM BENEATH OR WITHIN THE MAT RESULTING IN A SOIL SURFACE THAT CAN BE EXPECTED TO CONTINUE TO ERODE OR WHEN THE MAT HAS BECOME DISLODGED FROM THE SOIL SURFACE. WHEN REPETITIVE FAILURES OCCUR AT THE SAME LOCATION, REVIEW CONDITIONS AND LIMITATIONS OF TURF REINFORCEMENT MATS AND DETERMINE IF ADDITIONAL CONTROLS, (E.G. DIVERSIONS, STONE BARRIERS) ARE NEEDED TO ENSURE SUCCESS. REPAIR MAT FAILURES WITHIN ONE WORK DAY. AFTER THE TURF HAS BECOME ESTABLISHED, INSPECT ANNUALLY OR AFTER MAJOR STORM EVENTS.
15. INSPECT STONE SLOPE PROTECTION PERIODICALLY TO DETERMINE IF SCOUR HAS OCCURRED BENEATH THE STONE OR FILTER BLANKET OR DISLODGED ANY OF THE STONE OR FILTER BLANKET MATERIALS. ONCE A STONE SLOPE PROTECTION INSTALLATION HAS BEEN COMPLETED, IT SHOULD REQUIRE VERY LITTLE MAINTENANCE. PERIODIC REMOVAL OF WOODY VEGETATION (E.G. ANNUAL) MAY BE REQUIRED TO INSURE THE INTEGRITY OF THE RIPRAP. IF SLIPPAGE OR DISPLACEMENT OCCUR, CONDUCT AN ENGINEERING ANALYSIS TO DETERMINE THE CAUSE. OVERLAND WATER FLOW, EXCESSIVE SEEPAGE, DEEP SLOPE FAILURE OR SURFICIAL STRUCTURAL FAILURE SHOULD BE INVESTIGATED BY AN ENGINEER. REPAIR FAILED AREAS AND/OR IMPLEMENT ALTERNATE MEASURES TO OBTAIN STABILITY.
16. STORAGE AND DISPOSAL: MATERIALS WHICH COULD BE A POTENTIAL SOURCE OF STORMWATER POLLUTION SUCH AS GASOLINE, DIESEL FUEL, HYDRAULIC OIL, ETC., SHALL BE STORED AT THE END OF EACH DAY IN A STORAGE TRAILER OR COVERED LOCATION AND TAKEN OFF-SITE AND PROPERLY DISPOSED OF. ALL TYPES OF WASTE GENERATED AT THIS SITE SHALL BE DISPOSED OF IN A MANNER CONSISTENT WITH STATE LAW AND/OR REGULATIONS.
17. CONTROL OF ALLOWABLE NON-STORMWATER DISCHARGES: IF ALLOWABLE NON-STORM WATER DISCHARGES ARE OCCURRING AT THE SITE, SUCH DISCHARGES SHALL BE VISUALLY OBSERVED AND RECORDED AS OUTLINED BELOW. THE LIST OF EXPECTED SOURCES OF ALLOWABLE NON-STORM WATER DISCHARGES FOR THIS PROJECT ARE AS FOLLOWS: (1) DISCHARGE FROM VEHICLE WASHDOWN WHERE NO DETERGENTS ARE USED, (2) EXTERNAL BUILDING WASHDOWN WHERE NO DETERGENTS ARE USED, (3) THE USE OF WATER TO CONTROL DUST, (4) FIRE HYDRANT FLUSHINGS, (5) LAWN WATERING, (6) POTABLE WATER SOURCES INCLUDING WATERLINE FLUSHINGS, (8) IRRIGATION DRAINAGE, (9) PAVEMENT WASHWATERS WHERE SPILLS OR LEAKS OF TOXIC OR HAZARDOUS MATERIALS HAVE NOT OCCURRED (UNLESS ALL SPILLED MATERIALS HAVE BEEN REMOVED) AND WHERE NO DETERGENTS ARE USED, AND (10) FOUNDATION OR FOOTING DRAINS WHERE FLOWS ARE NOT CONTAMINATED WITH PROCESS SUCH AS SOLVENTS OR CONTAMINATED BY CONTACT WITH SOILS WHERE SPILLS OR LEAKS OF TOXIC OR HAZARDOUS MATERIALS HAS OCCURRED.
18. CONCRETE WASHOUT AREAS AND VEHICLE/EQUIPMENT FUELING ACTIVITIES SHALL BE LIMITED TO UPLAND LOCATIONS WITHIN THE PROJECT LIMIT OF DISTURBANCE THAT ARE LOCATED WITHIN A PORTION OF THE TEMPORARY STAGING AND STORAGE AREAS THAT ARE AT LEAST 50 FEET OUTSIDE OF JURISDICTIONAL WETLANDS.
19. SPILL/LEAK PROTECTION AND RESPONSE: SPILL PREVENTION AND RESPONSE EQUIPMENT SHALL BE LOCATED ON ALL CONSTRUCTION EQUIPMENT OPERATED WITHIN THE PROJECT'S LIMIT OF DISTURBANCE. DEPLOY BOOMS AND OTHER CONTAINMENT/CLEANUP MEASURES IN THE EVENT OF A SPILL OR LEAK. NOTIFY LOCAL FIRE DEPT. AND MASSDEP IMMEDIATELY OF ANY SPILLS.

SPILL PREVENTION AND RESPONSE PROCEDURE

1. CONTROL OF ALLOWABLE NON-STORMWATER DISCHARGES: IF ALLOWABLE NON-STORM WATER DISCHARGES ARE OCCURRING AT THE SITE, SUCH DISCHARGES SHALL BE VISUALLY OBSERVED AND RECORDED AS OUTLINED BELOW AND IN ACCORDANCE WITH ALL APPLICABLE PERMITS AND AUTHORITIES HAVING JURISDICTION. THE LIST OF EXPECTED SOURCES OF ALLOWABLE NON-STORM WATER DISCHARGES FOR THIS PROJECT ARE AS FOLLOWS: (1) DISCHARGE FROM VEHICLE WASHDOWN WHERE NO DETERGENTS ARE USED, (2) FIRE HYDRANT FLUSHINGS, (3) WATER USED TO CONTROL DUST, (4) POTABLE WATER INCLUDING UNCONTAMINATED WATER LINE FLUSHINGS, (5) PAVEMENT WASH WATERS, (6) UNCONTAMINATED, NON-TURBID DISCHARGES OF GROUNDWATER OR SPRING WATER, AND (7) CONSTRUCTION DEWATERING WATER DISCHARGE.
2. ANY INCIDENT OF GROUNDWATER AND SURFACE WATER CONTAMINATION RESULTING FROM THE IMPROPER DISCHARGE OF POLLUTANTS TO THE RIVER SYSTEM SHALL BE THE RESPONSIBILITY OF THE PROPERTY OWNER AS WELL AS ANY OTHER PARTIES DETERMINED TO BE RESPONSIBLE FOR THE CONTAMINATION. PURSUANT TO STATE LAWS AND REGULATIONS, THE REGULATING AGENCY MAY REQUIRE THE PROPERTY OWNER AND OTHER RESPONSIBLE PARTIES TO REMEDIATE ANY INCIDENTS THAT MAY ADVERSELY IMPACT GROUNDWATER QUALITY.
3. THE PROPERTY OWNER SHALL BE RESPONSIBLE TO REMEDIATE INCIDENTS THAT ADVERSELY IMPACT GROUNDWATER AND SURFACE WATER QUALITY.

GENERAL CONSTRUCTION SEQUENCE

1. IT IS ANTICIPATED THAT CONSTRUCTION WILL BEGIN IN JUNE OF 2023 AND END IN DECEMBER 2024. DAM REMOVAL, RIVER CHANNEL IMPROVEMENTS, SLOPE STABILIZATION, AND OTHER IN-CHANNEL MODIFICATION ACTIVITIES SHALL BE PERFORMED WITHIN THE SEASONAL LOW-FLOW PERIOD (JULY 1 – OCTOBER 31). APPROPRIATE PERMITTING AGENCIES SHALL BE NOTIFIED IF ANY IN-CHANNEL WORK BEFORE OR AFTER THIS PERIOD AT LEAST 10 CALENDAR DAYS BEFORE SUCH WORK OCCURS.
2. THE DAM REMOVAL, RIVER CHANNEL IMPROVEMENTS, AND SLOPE STABILIZATION SHALL TAKE PLACE IN THE SEQUENCE OUTLINED IN THE PROPOSED SEQUENCE OF CONSTRUCTION ON THE "WATER CONTROL & CONSTRUCTION SEQUENCING PLANS" IN ORDER TO PROVIDE CONTROL OF SEDIMENT MOVEMENT UNTIL THE DAM HAS BEEN REMOVED AND THE RIVER CHANNEL AND BANK AREAS HAVE BEEN GRADED AND STABILIZED AS SHOWN ON THE PLANS. THE GENERAL SEQUENCE FOR CONSTRUCTION IS AS FOLLOWS:
   A. CONDUCT SITE MOBILIZATION ACTIVITIES AT CASHMAN PARK. ESTABLISH TEMPORARY STAGING AND STORAGE AREAS WITHIN THE PARK IN ADDITION TO TEMPORARY CONSTRUCTION ACCESS AND PEDESTRIAN ACCESS TO PLAYGROUND AND SKATE PARK. INSTALL PERIMETER SEDIMENT CONTROL BARRIERS WITHIN PARK AS OUTLINED ON THE SITE PREPARATION AND EROSION CONTROL PLANS. ANY TEMPORARY SOIL STOCKPILE AREAS DURING CONSTRUCTION WILL ALSO BE ENCOMPASSED BY PERIMETER CONTROLS.
   B. AFTER MOBILIZING AND INSTALLING TEMPORARY EROSION CONTROL MEASURES WITHIN THE PARK, INSTALL TEMPORARY EROSION CONTROLS AT THE PORTION OF THE PARKING LOT OF PARCEL 516-304-1 (SAM'S FOOD STORE PROPERTY) WITHIN THE LIMIT OF DISTURBANCE.
   C. INSTALL THE TEMPORARY CONSTRUCTION ACCESS TO THE RIVER AT PARCEL 516-304-1, REMOVE 20-FOOT SECTION OF THE FREESTANDING PORTION OF THE PARKING LOT RETAINING WALL BEHIND THE SAM'S STORE BUILDING STRUCTURE (OR AS REQUIRED TO FACILITATE ACCESS), AND CONSTRUCT TEMPORARY STONE RIPRAP ACCESS DOWN THE SLOPE (AT 2H:1V) IN ORDER TO GAIN ACCESS TO THE IMPOUNDMENT JUST UPSTREAM OF THE DAM FROM PARCEL 516-304-1 FOR CONSTRUCTION EQUIPMENT AND/OR BARGE ACCESS TO DAM. INSTALL FLOATING TURBIDITY BARRIER JUST UPSTREAM OF THE WINTER STREET BRIDGE OPENING.
   D. INCREMENTALLY LOWER THE IMPOUNDMENT BY 12-INCHES PER DAY TO DOWN TO EL. 14.5 FEET AND REMOVE A 50-FOOT SECTION OF THE UPPER PORTION OF THE DAM DOWN TO EL. 14.5 FEET. DO NOT DISTURB SECTION OF DAM WITHIN 10-FEET OF ITS CONNECTION TO BUILDING ON RIVER LEFT AND WITHIN 10-FEET OF ITS CONNECTION TO RIVER WALL ON RIVER RIGHT.
   E. CONSTRUCT TEMPORARY RIVER CROSSING AT CASHMAN'S PARK AND THE STONE ACCESS/HAUL ROAD DOWNSTREAM TO THE AREA OF SEDIMENT CONTAMINATION. PERFORM CONTAMINATED SEDIMENT REMOVAL OPERATIONS. HAUL SEDIMENT TO CASHMAN PARK TEMPORARY SOIL STORAGE AREA FOR DEWATERING AND ULTIMATE TRANSPORT OFF-SITE.
   F. ONCE CONTAMINATED SEDIMENT HAS BEEN REMOVED GRADE CHANNEL BANKS AND CHANNEL BOTTOM IN THIS LOCATION TO PROPOSED GRADE AND STABILIZE WITH LOWER SLOPE PROTECTION AND CHANNEL BOTTOM STABILIZATION MEASURES.
   G. CONTINUE CONSTRUCTION OF STONE ACCESS/HAUL ROAD BETWEEN THE TEMPORARY RIVER CROSSING AT CASHMAN PARK AND THE UPSTREAM LIMIT OF PROPOSED CONSTRUCTION. THEN INSTALL TEMPORARY RIVER CROSSING AT UPSTREAM LIMIT OF PROJECT TO ASSIST IN CONTROLLING WATER LEVEL REDUCTIONS UPSTREAM OF THIS LOCATION (I.E. THE MBTA BRIDGE).
   H. FOLLOWING CONSTRUCTION OF THE UPSTREAM TEMPORARY RIVER CROSSING, PERFORM THE SECOND PHASE OF INCREMENTAL DAM REMOVAL. LOWER THE DAM CREST FROM EL. 14.5± FEET DOWN TO EL. 12.0±.
   I. PERFORM RIVER CHANNEL IMPROVEMENTS BETWEEN THE UPSTREAM RIVER CROSSING AND THE FORMER AREA OF SEDIMENT CONTAMINATION AS INDICATED IN THE CONTRACT DOCUMENTS INCLUDING CHANNEL REALIGNMENT, SEDIMENT EXCAVATION AND RELOCATION, GRADE CONTROL BOULDER WEIR NOS. 1 THRU 5, SCOUR POOL NOS. 1 THRU 5, LOWER AND UPPER SLOPE STABILIZATION MEASURES, FISHING PLATFORM AT CASHMAN PARK BELOW THE BANKFULL ELEVATION, AND VEGETATIVE RESTORATION MEASURES (I.E. SEEDING, AT MINIMUM, PRIOR TO END OF LOW-FLOW SEASON).
   J. AT THE END OF THE FIRST LOW FLOW SEASON, THE CONTRACTOR SHALL CEASE PHASE I IN-RIVER CONSTRUCTION ACTIVITIES AND WORK OUTSIDE OF THE RIVER. SUCH WORK MAY INCLUDE THE CONSTRUCTION OF THE UPPER PORTION OF THE RIVER WALL ALONG PARCEL 516-304-1, PEDESTRIAN BRIDGE AT CASHMAN PARK, THE GRAVEL WALKING TRAIL ON EASTERN SIDE OF RIVER, AND THE PORTION OF THE FISHING PLATFORM AND CANOE ACCESS AT CASHMAN PARK ABOVE THE MEAN LOW WATER LEVEL.
   K. AT THE START OF THE SECOND LOW-FLOW SEASON, EXTEND TEMPORARY STONE ACCESS/HAUL ROAD FROM THE SOUTHERN LIMIT OF THE PREVIOUSLY CONSTRUCTED HAUL ROAD ON RIVER LEFT DOWNSTREAM TO THE DAM.
   L. REMOVE THE REMAINING SECTION OF THE DAM DOWN TO APPROXIMATELY 2 FEET BELOW PROPOSED GRADE. TAKE CARE NOT TO REMOVE SECTIONS OF THE DAM WITHIN 10-FEET OF EXISTING BUILDING CONNECTION (ON RIVER LEFT) AND RETAINING WALL CONNECTION (ON RIVER RIGHT).
   M. RELOCATE FLOATING TURBIDITY CURTAIN TO SPAN ACROSS RIVER AT DOWNSTREAM LIMIT OF PROJECT DISTURBANCE AND INSTALL SCOUR COUNTERMEASURES BELOW THE WINTER STREET BRIDGE ALONG WITH LOW-FLOW CHANNEL ON DOWNSTREAM SIDE OF BRIDGE.
   N. CONSTRUCT NATURE-LIKE FISHWAY, RIVER WALLS, AND BANK STABILIZATION ON BOTH SIDES OF THE RIVER.
   O. PROCEED WITH IN-RIVER IMPROVEMENTS AND BANK STABILIZATION MEASURES IN UPSTREAM DIRECTION. FINISH GRADE, STABILIZE, AND RESTORE TEMPORARY HAUL ROAD AREA AS WORK PROGRESSES UPSTREAM.
   P. CONTINUE CONSTRUCTION OF IN-RIVER IMPROVEMENTS AND BANK STABILIZATION MEASURES UNTIL THEY ARE COMPLETE WITHIN THIS SECTION OF RIVER; REMOVE TEMPORARY RIVER CROSSING NEAR BENJAMIN STREET; FINISH GRADE, STABILIZE, AND RESTORE TEMPORARY HAUL ROAD AREA IN THIS SECTION; AND BEGIN CONSTRUCTION OF IN-RIVER IMPROVEMENTS AND BANK STABILIZATION MEASURES BETWEEN THE FORMER BENJAMIN TEMPORARY CROSSING AND THE FORMER SEDIMENT CONTAMINATION AREA. CONNECT IMPROVEMENTS INTO PREVIOUSLY CONSTRUCTED IMPROVEMENTS AS PART OF PHASE 1. UTILIZE TEMPORARY COFFERDAMS (LARGE SANDBAGS OR SIMILAR) AND CONSTRUCTION DEWATERING PUMPS AS REQUIRED TO ISOLATE SECTIONS OF THE RIVER [illegible] TEMPORARY CROSSING AND THE NATURE-LIKE FISHWAY TO FACILITATE CONSTRUCTION [illegible].
   Q. FINISH GRADE, STABILIZE, AND RESTORE TEMPORARY HAUL ROAD AREA UPSTREAM [illegible] CONTAMINATION AREA. REMOVE TEMPORARY RIVER CROSSING AT CASHMAN'S [illegible] AREA.
   R. PERFORM ANY REMAINING RESTORATION ACTIVITIES ALONG THE RIVER.
   S. FINISH CONSTRUCTION OF RIVER OVERLOOK AREA, UPPER PORTION OF WALL AND INSTALL STABILIZATION/RESTORATION MEASURES AT PARCEL 516-304-1. REMOVE TEMPORARY STONE CONSTRUCTION ACCESS AT THIS PARCEL AND RESTORE ANY DAMAGED PAVEMENT TO ORIGINAL CONDITIONS OR BETTER.
   T. FINISH CONSTRUCTION OF ANY IN-RIVER OR OUT-OF-RIVER IMPROVEMENTS AT CASHMAN PARK. ONCE IMPROVEMENTS HAVE BEEN ACCEPTED BY ENGINEER AND/OR OWNER, RESTORE UPLAND AREAS DISTURBED BY CONSTRUCTION WITHIN CASHMAN PARK, REMOVE EROSION CONTROLS, AND [illegible].

COMMONWEALTH OF MASSACHUSETTS
DEAN E. AUDET
CIVIL
No. 45977
REGISTERED PROFESSIONAL ENGINEER

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ :
VERT :
DATUM:
HORZ : NAD83
VERT : NAVD88
0
GRAPHIC SCALE

FUSS & O'NEILL
1550 MAIN STREET, SUITE 400
SPRINGFIELD, MA 01103
413 452 0445
www.fando.com

CITY OF HAVERHILL
GENERAL NOTES AND LEGEND
LITTLE RIVER DAM REMOVAL AND RESTORATION
HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022
GI-002

File: J:\DWG\P2017\0390\U30\Civil\Plan\20170390U30_GEN01.dwg Layout: 11X17-GI-002 Plotted: 2022-12-08 3:12 PM Saved: 2022-12-08 1:45 PM User: CNauman
PC3: AUTOCAD PDF (GENERAL DOCUMENTATION).PC3 STB/CTB: FO HALF STB
MS VIEW: LAYER STATE:

COMMONWEALTH OF MASSACHUSETTS
DEAN E. AUDET
CIVIL
REGISTERED PROFESSIONAL ENGINEER

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ.: 1" = 300'
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0 150 300
GRAPHIC SCALE

FUSS & O'NEILL
1550 MAIN STREET, SUITE 400
SPRINGFIELD, MA 01103
413.452.0445
www.fando.com

CITY OF HAVERHILL

INDEX PLAN

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

GI-003

File: J:\DWG\P2017\0390\U30\Civil\Plan\20170390U30_IND01.dwg Layout: 11X17-GI-003 Plotted: 2022-12-08 3:13 PM Saved: 2022-12-08 1:46 PM User: CNauman
PC3: AUTOCAD PDF (GENERAL DOCUMENTATION).PC3 STB/CTB: FO HALF.STB
LAYER STATE:
MS VIEW:

MATCH LINE SEE SHEET CS-102

STEVENS STREET

MBTA RAILROAD

WINTER STREET

LITTLE RIVER

LITTLE RIVER DAM
SPILLWAY CREST EL.=18.6±

FORMER/ABANDONED
12' WIDE MILL
RACEWAY CHANNEL

16'Wx8'H STONE
MASONRY ARCH CULVERT

54" RCP OUTFALL
(NPDES 021H)

PROPERTY CONTAINS
UST ID No. 5252

BENCHMARK 302

BENCHMARK 301

SCOUR HOLE

42" RCP OUTFALL (NPDES 038)
INV. 11.39

21" OVERFLOW
(LR0934)

30'Wx14'H STONE
MASONRY ARCH CULVERT

BIT. SIDEWALK AND
GRANITE CURB

AUL PROPERTY WITH
CLASS B2 RAO

200' RIVERFRONT AREA

100' BUFFER ZONE

50' NO BUILD ZONE

25' NO DISTURBANCE ZONE

LAFAYETTE SQUARE

ESSEX STREET

LEGEND:

FLOODWAY	FEMA FLOODWAY
100YR	100-YEAR FLOOD ELEVATION
500YR	500-YEAR FLOOD ELEVATION
AA100	WETLAND DELINEATION FLAG
	BANK/MEAN ANNUAL HIGH WATER
	BORDERING VEGETATED WETLANDS
	25' NO DISTURBANCE ZONE
	50' NO BUILD ZONE
	100' BUFFER ZONE
	200' RIVERFRONT AREA
	BASE CONDITION FLOW LIMITS / MEAN ANNUAL LOW WATER
	PARCEL BOUNDARY
D	DRAIN/CSO LINE
W	WATER LINE
G	GAS LINE
E/T	ELECTRIC/TELEPHONE LINE
	CATCH BASIN
	EXISTING GROUND OR BOTTOM OF RIVER CHANNEL CONTOUR
100	WATER GATE / GAS GATE
	TREE LINE

COMMONWEALTH OF MASSACHUSETTS
DEAN E. AUDET
CIVIL
NO. 45977
REGISTERED PROFESSIONAL ENGINEER

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ.: 1" = 70'
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0 35 70
GRAPHIC SCALE

FUSS & O'NEILL
1550 MAIN STREET, SUITE 400
SPRINGFIELD, MA 01103
413.452.0445
www.fando.com

CITY OF HAVERHILL

EXISTING CONDITIONS PLAN NO. 1

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

CS-101

File: J:\DWG\P20170390\U30\Civil\Plan\20170390U30_EXC01.dwg Layout: 11X17-CS-101 Plotted: 2022-12-08 3:14 PM Saved: 2022-11-29 3:18 PM User: CNauman
PC3: AUTOCAD PDF (GENERAL DOCUMENTATION).PC3 STB/CTB: FO HALF.STB
LAYER STATE:
MS VIEW:

MATCH LINE SEE SHEET CS-103

MATCH LINE SEE SHEET CS-101

MBTA RAILROAD

LITTLE RIVER

LITTLE RIVER STREET

APPLE STREET

STEVENS STREET

BENJAMIN STREET

CLIFF STREET

FLOODWAY

100YR

500YR

50' NO BUILD ZONE

25' NO DISTURBANCE ZONE

100' BUFFER ZONE

200' RIVERFRONT AREA

LEGEND:

FLOODWAY	FEMA FLOODWAY
100YR	100-YEAR FLOOD ELEVATION
500YR	500-YEAR FLOOD ELEVATION
AA100	WETLAND DELINEATION FLAG
	BANK/MEAN ANNUAL HIGH WATER
	BORDERING VEGETATED WETLANDS
	25' NO DISTURBANCE ZONE
	50' NO BUILD ZONE
	100' BUFFER ZONE
	200' RIVERFRONT AREA
	BASE CONDITION FLOW LIMITS / MEAN ANNUAL LOW WATER
	PARCEL BOUNDARY
D	DRAIN/CSO LINE
W	WATER LINE
G	GAS LINE
E/T	ELECTRIC/TELEPHONE LINE
	CATCH BASIN
	EXISTING GROUND OR BOTTOM OF RIVER CHANNEL CONTOUR
WG	WATER GATE / GAS GATE
	TREE LINE

COMMONWEALTH OF MASSACHUSETTS
DEANE. AUDET
CIVIL
No. 45907
REGISTERED PROFESSIONAL ENGINEER

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ.: 1" = 70'
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0 35 70
GRAPHIC SCALE

FUSS & O'NEILL
1550 MAIN STREET, SUITE 400
SPRINGFIELD, MA 01103
413.452.0445
www.fando.com

CITY OF HAVERHILL

EXISTING CONDITIONS PLAN NO. 2

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

CS-102

File: J:\DWG\P2017\0390\U30\Civil\Plan\20170390U30_EXC01.dwg Layout: 11X17-CS-102 Plotted: 2022-12-08 3:14 PM Saved: 2022-11-29 3:18 PM User: CNauman
PC3: AUTOCAD PDF (GENERAL DOCUMENTATION).PC3 STB/CTB: FO HALF.STB
LAYER STATE:
MS VIEW:

MATCH LINE SEE SHEET CS-104

MATCH LINE SEE SHEET CS-102

MBTA RAILROAD

LITTLE RIVER

CASHMAN'S FIELD

SKATE PARK

LEBLANC STREET

100' BUFFER ZONE

50' NO BUILD ZONE

25' NO DISTURBANCE ZONE

200' RIVERFRONT AREA

BUILDING NOT PRESENT DURING WETLAND DELINEATION ON 9/27/21

FLOODWAY

100YR

500YR

LEGEND:

- FLOODWAY — FEMA FLOODWAY
- 100YR — 100-YEAR FLOOD ELEVATION
- 500YR — 500-YEAR FLOOD ELEVATION
- AA100 — WETLAND DELINEATION FLAG
- BANK/MEAN ANNUAL HIGH WATER
- BORDERING VEGETATED WETLANDS
- 25' NO DISTURBANCE ZONE
- 50' NO BUILD ZONE
- 100' BUFFER ZONE
- 200' RIVERFRONT AREA
- BASE CONDITION FLOW LIMITS / MEAN ANNUAL LOW WATER
- PARCEL BOUNDARY
- DRAIN/CSO LINE
- W — WATER LINE
- G — GAS LINE
- E/T — ELECTRIC/TELEPHONE LINE
- CATCH BASIN
- EXISTING GROUND OR BOTTOM OF RIVER CHANNEL CONTOUR
- WATER GATE / GAS GATE
- TREE LINE

COMMONWEALTH OF MASSACHUSETTS
DEAN E. AUDET
CIVIL
No. 45977
REGISTERED
PROFESSIONAL ENGINEER

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ.: 1" = 70'
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0 35 70
GRAPHIC SCALE

FUSS & O'NEILL
1550 MAIN STREET, SUITE 400
SPRINGFIELD, MA 01103
413.452.0445
www.fando.com

CITY OF HAVERHILL

EXISTING CONDITIONS PLAN NO. 3

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

CS-103

File: J:\DWG\P2017\0390\U30\Civil\Plan\20170390U30_EXC01.dwg Layout: 11X17-CS-103 Plotted: 2022-12-08 3:14 PM Saved: 2022-11-29 3:18 PM User: CNauman
PC3: AUTOCAD PDF (GENERAL DOCUMENTATION).PC3 STB/CTB: FO HALF.STB
LAYER STATE:
MS VIEW:

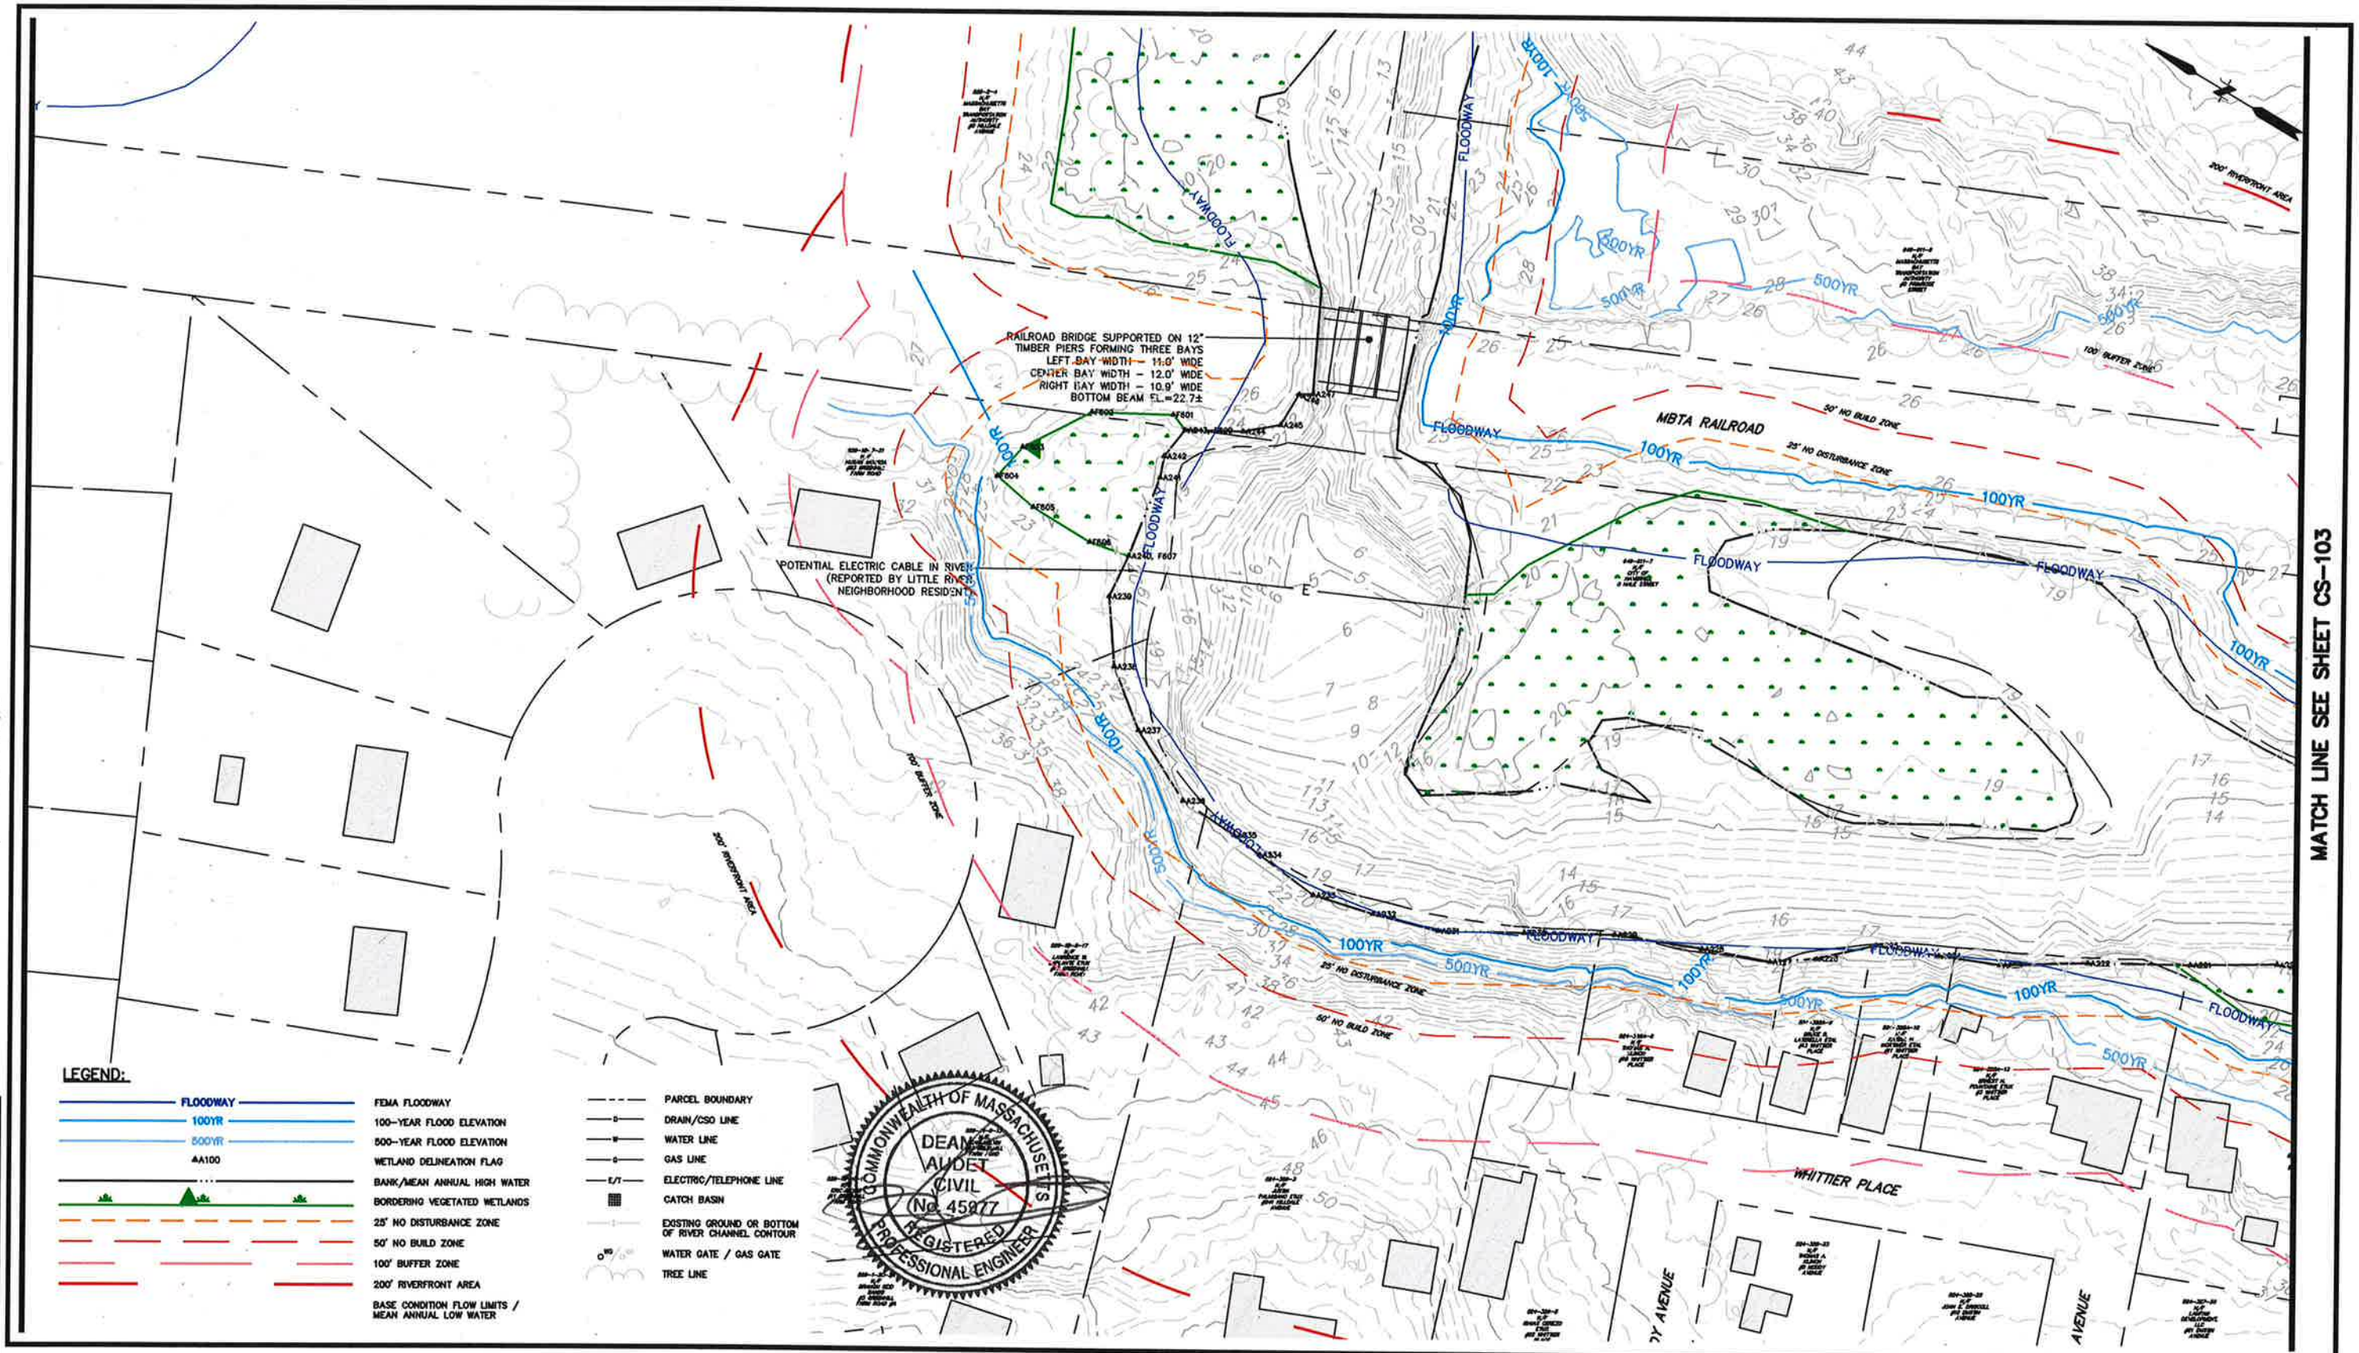

COMMONWEALTH OF MASSACHUSETTS
DEAN A. AUDET
CIVIL
No. 45977
REGISTERED PROFESSIONAL ENGINEER

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ.: 1" = 70'
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0 35 70
GRAPHIC SCALE

FUSS & O'NEILL
1550 MAIN STREET, SUITE 400
SPRINGFIELD, MA 01103
413.452.0445
www.fando.com

CITY OF HAVERHILL

EXISTING CONDITIONS PLAN NO. 4

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

CS-104

File: J:\DWG\P2017\03390\U30\Civil\Plan\20170390U30_EXC01.dwg Layout: 11X17-CS-104 Plotted: 2022-12-08 3:14 PM Saved: 2022-11-29 3:18 PM User: CNauman
PC3: AUTOCAD PDF (GENERAL DOCUMENTATION).PC3 STB(CTB: FO HALF.STB
LAYER STATE:
MS VIEW:

MATCH LINE SEE SHEET CP-102

LIMIT OF DISTURBANCE (TYP.)

TEMPORARY COFFERDAM (TYP.)

CLEARING LIMIT (TYP.)

UPPER RIVERBANK STABILIZATION AND FLOODPLAIN RESTORATION AREA (TYP.)

12" DIA. BIODEGRADABLE FIBER ROLL/VEGETATED COIR FASCINE (TYP.)

LOWER RIVER SLOPE STABILIZATION (TYP.)

TEMPORARY HAUL ROAD (TYP.)

TEMPORARY RIVER CROSSING (TYP.)

STEVENS STREET

MBTA RAILROAD

WINTER STREET

PROPERTY CONTAINS UST ID No. 5252

REMOVE AND DISPOSE OF DAM

FORMER/ABANDONED 12' WIDE MILL RACEWAY CHANNEL

16'W x 8'H STONE MASONRY ARCH CULVERT

54" RCP OUTFALL (NPDES 021H)

BENCHMARK 302

42" RCP OUTFALL (NPDES 038) INV. 11.39

FLOATING TYPE 3 PERMEABLE TURBIDITY BARRIER

RESTORE SIDEWALK AND GRANITE CURB TO PREVIOUS CONDITION OR BETTER. RE-USE GRANITE CURB IF POSSIBLE.

CONSTRUCTION EQUIPMENT AND STAGING AREA

AUL PROPERTY WITH CLASS B2 RAO

SILT FENCE FOR TEMPORARY STONE CONSTRUCTION ACCESS ROUTE AND STAGING AREA. RESTORE EXISTING FENCE TO PREVIOUS CONDITION OF BETTER.

GRANVILLE STREET

LAFAYETTE SQUARE

ESSEX STREET

PROPERTY CONTAINED USTs ID No. 5235 (REMOVED AS OF 7/30/20); FORMER AUL

NOTES:

1. IMPLEMENT AND MAINTAIN CONSTRUCTION ACCESS STABILIZATION MEASURES THROUGHOUT CONSTRUCTION. REMOVE ALL SUCH MEASURES AND STABILIZE/RESTORE ALL DISTURBED AREAS FOLLOWING CONSTRUCTION.
2. SUCH MEASURES SHALL BE COMPLETED BY THE CONTRACTOR AND ACCEPTED BY THE ENGINEER PRIOR TO INITIATION OF CONSTRUCTION ACTIVITIES.
3. REFER TO RIVER RESTORATION PLAN AND LANDSCAPE AND PLANTING PLAN FOR POST-CONSTRUCTION RESTORATION MEASURES (SEEDING AND PLANTING).
4. REFER TO WATER CONTROL AND CONSTRUCTION SEQUENCING PLAN FOR INSTALLATION OF HAUL ROADS, TEMPORARY COFFERDAMS AND FLOATING TURBIDITY CURTAIN(S).

COMMONWEALTH OF MASSACHUSETTS
DEAN E. AUDET
CIVIL
NO. 45977
REGISTERED PROFESSIONAL ENGINEER

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ.: 1" = 70'
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0 35 70
GRAPHIC SCALE

FUSS & O'NEILL
1550 MAIN STREET, SUITE 400
SPRINGFIELD, MA 01103
413-452-0445
www.fando.com

CITY OF HAVERHILL

SITE PREPARATION AND EROSION CONTROL PLAN NO. 1

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

CP-101

File: J:\DWG\P2017\0390\U30\Civil\Plan\20170390U30_ERO01.dwg Layout: 11X17-CP-101 Plotted: 2022-12-08 3:15 PM Saved: 2022-12-07 1:56 PM User: CNauman
PC3: AUTOCAD PDF (GENERAL DOCUMENTATION).PC3 STB/CTB: FO HALF.STB
MS VIEW: LAYER STATE:

MATCH LINE SEE SHEET CP-103

MATCH LINE SEE SHEET CP-101

MBTA RAILROAD

AREA OF CONTAMINATED SEDIMENT TO BE REMOVED

TEMPORARY HAUL ROAD (TYP.)

TEMPORARY HAUL ROAD BUMP OUTS (TYP.)

TEMPORARY RIVER CROSSING (TYP.)

UPPER RIVERBANK STABILIZATION AND FLOODPLAIN RESTORATION AREA (TYP.)

12" DIA. BIODEGRADABLE FIBER ROLL/VEGETATED COIR FASCINE (TYP.)

LOWER RIVER SLOPE STABILIZATION (TYP.)

TEMPORARY COFFERDAM (TYP.)

CLEARING LIMIT (TYP.)

LIMIT OF DISTURBANCE (TYP.)

STONE PROTECTION AT EXISTING OUTFALL

LOD

LITTLE RIVER STREET

APPLE STREET

STEVENS STREET

BENJAMIN STREET

CLIFF ST...ET

COMMONWEALTH OF MASSACHUSETTS
DEAN E. AUDET
CIVIL
No. 45677
REGISTERED
PROFESSIONAL ENGINEER

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ.: 1" = 70'
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0 35 70
GRAPHIC SCALE

FUSS & O'NEILL
1550 MAIN STREET, SUITE 400
SPRINGFIELD, MA 01103
413.452.0445
www.fando.com

CITY OF HAVERHILL

SITE PREPARATION AND EROSION CONTROL PLAN NO. 2

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

CP-102

COMMONWEALTH OF MASSACHUSETTS
DEAN E. AUDET
CIVIL
No. 45977
REGISTERED
PROFESSIONAL ENGINEER

TEMPORARY COFFERDAM (TYP.)

TEMPORARY HAUL ROAD (TYP.)

TEMPORARY HAUL ROAD BUMP OUTS (TYP.)

MBTA RAILROAD

TEMPORARY RIVER CROSSING (TYP.)

UPPER RIVERBANK STABILIZATION AND FLOODPLAIN RESTORATION AREA (TYP.)

12" DIA. BIODEGRADABLE FIBER ROLL/VEGETATED COIR FASCINE (TYP.)

LOWER RIVER SLOPE STABILIZATION (TYP.)

MBTA RAILROAD

CLEARING LIMIT (TYP.)

LIMIT OF DISTURBANCE (TYP.)

MATCH LINE SEE SHEET CP-104

MATCH LINE SEE SHEET CP-102

SKATE PARK

LEBLANC STREET

LOD

CSF

SILT FENCE AND 6' HIGH TEMPORARY CHAINLINK CONSTRUCTION FENCE TO ENCOMPASS TEMPORARY STONE CONSTRUCTION ACCESS ROUTE AND STAGING AREA (TYP.)

CASHMAN'S FIELD

PLACE SILT FENCE AND CONSTRUCTION FENCE AROUND KAYAK/CANOE LAUNCH PATH ONLY DURING THAT PHASE OF WORK TO PRESERVE PEDESTRIAN ACCESS TO PLAYGROUNG

TEMPORARY 5' WIDE COMPACTED GRAVEL PEDESTRIAN WALKWAY (FOR SKATE PARK ACCESS)

RESTORE CHAIN LINK FENCE TO PREVIOUS CONDITION OR BETTER

CONSTRUCTION EQUIPMENT, STAGING, AND SOIL STORAGE AREAS (TYP.)

TEMPORARY 5' WIDE COMPACTED GRAVEL PEDESTRIAN WALKWAY (FOR SKATE PARK ACCESS)

REMOVE SECTION OF WOOD GUARDRAIL AND CONNECT TEMPORARY GRAVEL PEDESTRIAN WALKWAY TO EXIST. BITUMINOUS SIDEWALK; FOLLOWING CONSTRUCTION, REMOVE WALKWAY AND RESTORE DISTURBED LAWN AREAS

INSET 2

MATCH LINE SEE INSET 2

MATCH LINE SEE INSET 1

SILT FENCE AND 6' HIGH TEMPORARY CHAINLINK CONSTRUCTION FENCING TO SURROUND TEMPORARY STONE CONSTRUCTION ACCESS ROUTE (TYP.)

TEMPORARY 5' WIDE COMPACTED GRAVEL PEDESTRIAN WALKWAY (FOR PLAYGROUND ACCESS)

GATED ENTRANCE TO CONSTRUCTION ACCESS ROUTE; SECURE/LOCK GATES AT END OF WORK DAY

FOLLOWING CONSTRUCTION: RESTORE SIDEWALK, CURBING, GATE, WOODEN GUARDRAIL, GRAVEL WALKWAY AND DRIVEWAY TO PREVIOUS CONDITION OR BETTER

TEMPORARY STONE CONSTRUCTION ACCESS

HILLDALE AVENUE

INSET 1

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ.: 1" = 70'
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0 35 70
GRAPHIC SCALE

FUSS & O'NEILL
1550 MAIN STREET, SUITE 400
SPRINGFIELD, MA 01103
413.452.0445
www.fando.com

CITY OF HAVERHILL

SITE PREPARATION AND EROSION CONTROL PLAN NO. 3

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

CP-103

File: J:\DWG\P2017\0390\U30\Civil\Plan\20170390U30_ERO01.dwg Layout: 11X17-CP-103 Plotted: 2022-12-08 3:16 PM Saved: 2022-12-07 1:56 PM User: CNauman
PC3 AUTOCAD PDF (GENERAL DOCUMENTATION).PC3 STB/CTB: FO HALF.STB
LAYER STATE:
MS VIEW:

COMMONWEALTH OF MASSACHUSETTS
DEAN E. AUDET
CIVIL
No. 45977
REGISTERED PROFESSIONAL ENGINEER

RAILROAD BRIDGE SUPPORTED ON 12" TIMBER PIERS FORMING THREE BAYS
LEFT BAY WIDTH – 11.0' WIDE
CENTER BAY WIDTH – 12.0' WIDE
RIGHT BAY WIDTH – 10.9' WIDE
BOTTOM BEAM EL.=22.74

POTENTIAL ELECTRIC CABLE IN RIVER (REPORTED BY LITTLE RIVER NEIGHBORHOOD RESIDENT)

TEMPORARY RIVER CROSSING (TYP.)
TEMPORARY COFFERDAM (TYP.)
TEMPORARY HAUL ROAD (TYP.)
TEMPORARY HAUL ROAD BUMP OUTS (TYP.)
MBTA RAILROAD
CLEARING LIMIT (TYP.)
LIMIT OF DISTURBANCE (TYP.)
UPPER RIVERBANK STABILIZATION AND FLOODPLAIN RESTORATION AREA (TYP.)
12" DIA. BIODEGRADABLE FIBER ROLL/VEGETATED COIR FASCINE (TYP.)
LOWER RIVER SLOPE STABILIZATION (TYP.)
LOD
WHITTIER PLACE

MATCH LINE SEE SHEET CP-103

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ.: 1" = 70'
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0 35 70
GRAPHIC SCALE

FUSS & O'NEILL
1550 MAIN STREET, SUITE 400
SPRINGFIELD, MA 01103
413.452.0445
www.fando.com

CITY OF HAVERHILL

SITE PREPARATION AND EROSION CONTROL PLAN NO. 4

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

CP-104

File: J:\DWG\P2017\03390\U30\Civil\Plan\20170390U30_ERO01.dwg Layout: 11X17-CP-104 Plotted: 2022-12-08 3:16 PM Saved: 2022-12-07 1:56 PM User: CNauman
PC3: AUTOCAD PDF (GENERAL DOCUMENTATION).PC3 STB\CTB: FO HALF.STB
LAYER STATE:
MS VIEW:

MATCH LINE SEE SHEET CG-102

UPPER RIVERBANK STABILIZATION AND FLOODPLAIN RESTORATION AREA (TYP.)

COMPACTED GRAVEL WALKING TRAIL EL. 23.0±

PROPOSED 100 YEAR WATER SURFACE ELEVATION (TYP.)

12" DIA. BIODEGRADABLE FIBER ROLL/VEGETATED COIR FASCINE (TYP.)

APPROXIMATE LOCATION OF PORTAGE ACCESS FOR KAYAK/CANOE

LOWER RIVER SLOPE STABILIZATION (TYP.) CHOICE OF NATURAL OR STONE TO BE DETERMINED IN THE FIELD BY THE ENGINEER, SEE CONSTRUCTION DETAILS SHEET CD-502

SIGNAGE TO PROTECT PUBLIC FROM PADDLING FURTHER DOWNSTREAM

POOL BOTTOMS AND BANKS FORMED WITH NATIVE STABLE STONE/COBBLES INFILLED WITH NATIVE SEDIMENT AND INTERSPERSED SMALL/MEDIUM BOULDERS (TYP.)

SLOPE PROTECTION RETAINING WALL (SEE STRUCTURAL PLANS AND DETAILS)
TOP EL. VARIES BETWEEN EL. 18.5 TO EL 15.0
BOTTOM EL. VARIES BETWEEN EL. 14.0 TO EL 9.0

SLOPE PROTECTION RETAINING WALL (SEE STRUCTURAL PLANS AND DETAILS)
TOP EL. VARIES BETWEEN EL. 25.0 TO EL 22.0
BOTTOM EL. VARIES BETWEEN EL. 17.0 TO EL. 11.5

STEVENS STREET

WINTER STREET

MBTA RAILROAD

GRANVILLE STREET

LAFAYETTE SQUARE

ESSEX STREET

PROPERTY CONTAINS UST ID No. 5252

PROPERTY CONTAINED USTs ID No. 5235 (REMOVED AS OF 7/30/20); FORMER AUL

54" RCP OUTFALL (NPDES 021H)

42" RCP OUTFALL (NPDES 038) INV. 11.39

BENCHMARK 302

BENCHMARK 301

FORMER/ABANDONED 10' WIDE MASONRY ARCH CURVED RACEWAY CHANNEL

BIT. SIDEWALK AND GRANITE CURB

100YR

LOD

COMMONWEALTH OF MASSACHUSETTS
DEAN E. AUDET
CIVIL
No. 43977
REGISTERED PROFESSIONAL ENGINEER

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ.: 1" = 70'
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0 35 70
GRAPHIC SCALE

CITY OF HAVERHILL

SITE LAYOUT AND GRADING PLAN NO. 1

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

CG-101

MATCH LINE SEE SHEET CG-103

MATCH LINE SEE SHEET CG-101

PROPOSED 100 YEAR WATER SURFACE ELEVATION (TYP.)

SCOUR POOL #5
POOL BOTTOM EL.=8.70
POOL BOTTOM FORMED WITH NATIVE STABLE STONE/COBBLES INFILLED WITH NATIVE SEDIMENT (TYP.)

GRADE CONTROL BOULDER WEIR #5
TOP OF WEIR EL.= 11.22
3.5' WIDE NOTCH INV. EL.=10.22

COMPACTED GRAVEL WALKING TRAIL
EL. 23.0±

UPPER RIVERBANK STABILIZATION AND FLOODPLAIN RESTORATION AREA (TYP.)

12" DIA. BIODEGRADABLE FIBER ROLL/VEGETATED COIR FASCINE (TYP.)

LOWER RIVER SLOPE STABILIZATION (TYP.)
CHOICE OF NATURAL OR STONE TO BE DETERMINED IN THE FIELD BY THE ENGINEER, SEE CONSTRUCTION DETAILS SHEET CD-502

MBTA RAILROAD

GRADE CONTROL BOULDER WEIR #6
TOP OF WEIR EL.= 11.22
3.5' WIDE NOTCH INV. EL.=10.22

STEVENS STREET

SCOUR POOL #6
POOL BOTTOM EL.=8.00
POOL BOTTOM FORMED WITH NATIVE STABLE STONE/COBBLES INFILLED WITH NATIVE SEDIMENT (TYP.)

LITTLE RIVER STREET

APPLE STREET

BENJAMIN STREET

CLIFF STREET

100YR

LOD

COMMONWEALTH OF MASSACHUSETTS
DEAN E. AUDET
CIVIL
No. 45977
REGISTERED
PROFESSIONAL ENGINEER

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ.: 1" = 70'
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0 35 70
GRAPHIC SCALE

CITY OF HAVERHILL

SITE LAYOUT AND GRADING PLAN NO. 2

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

CG-102

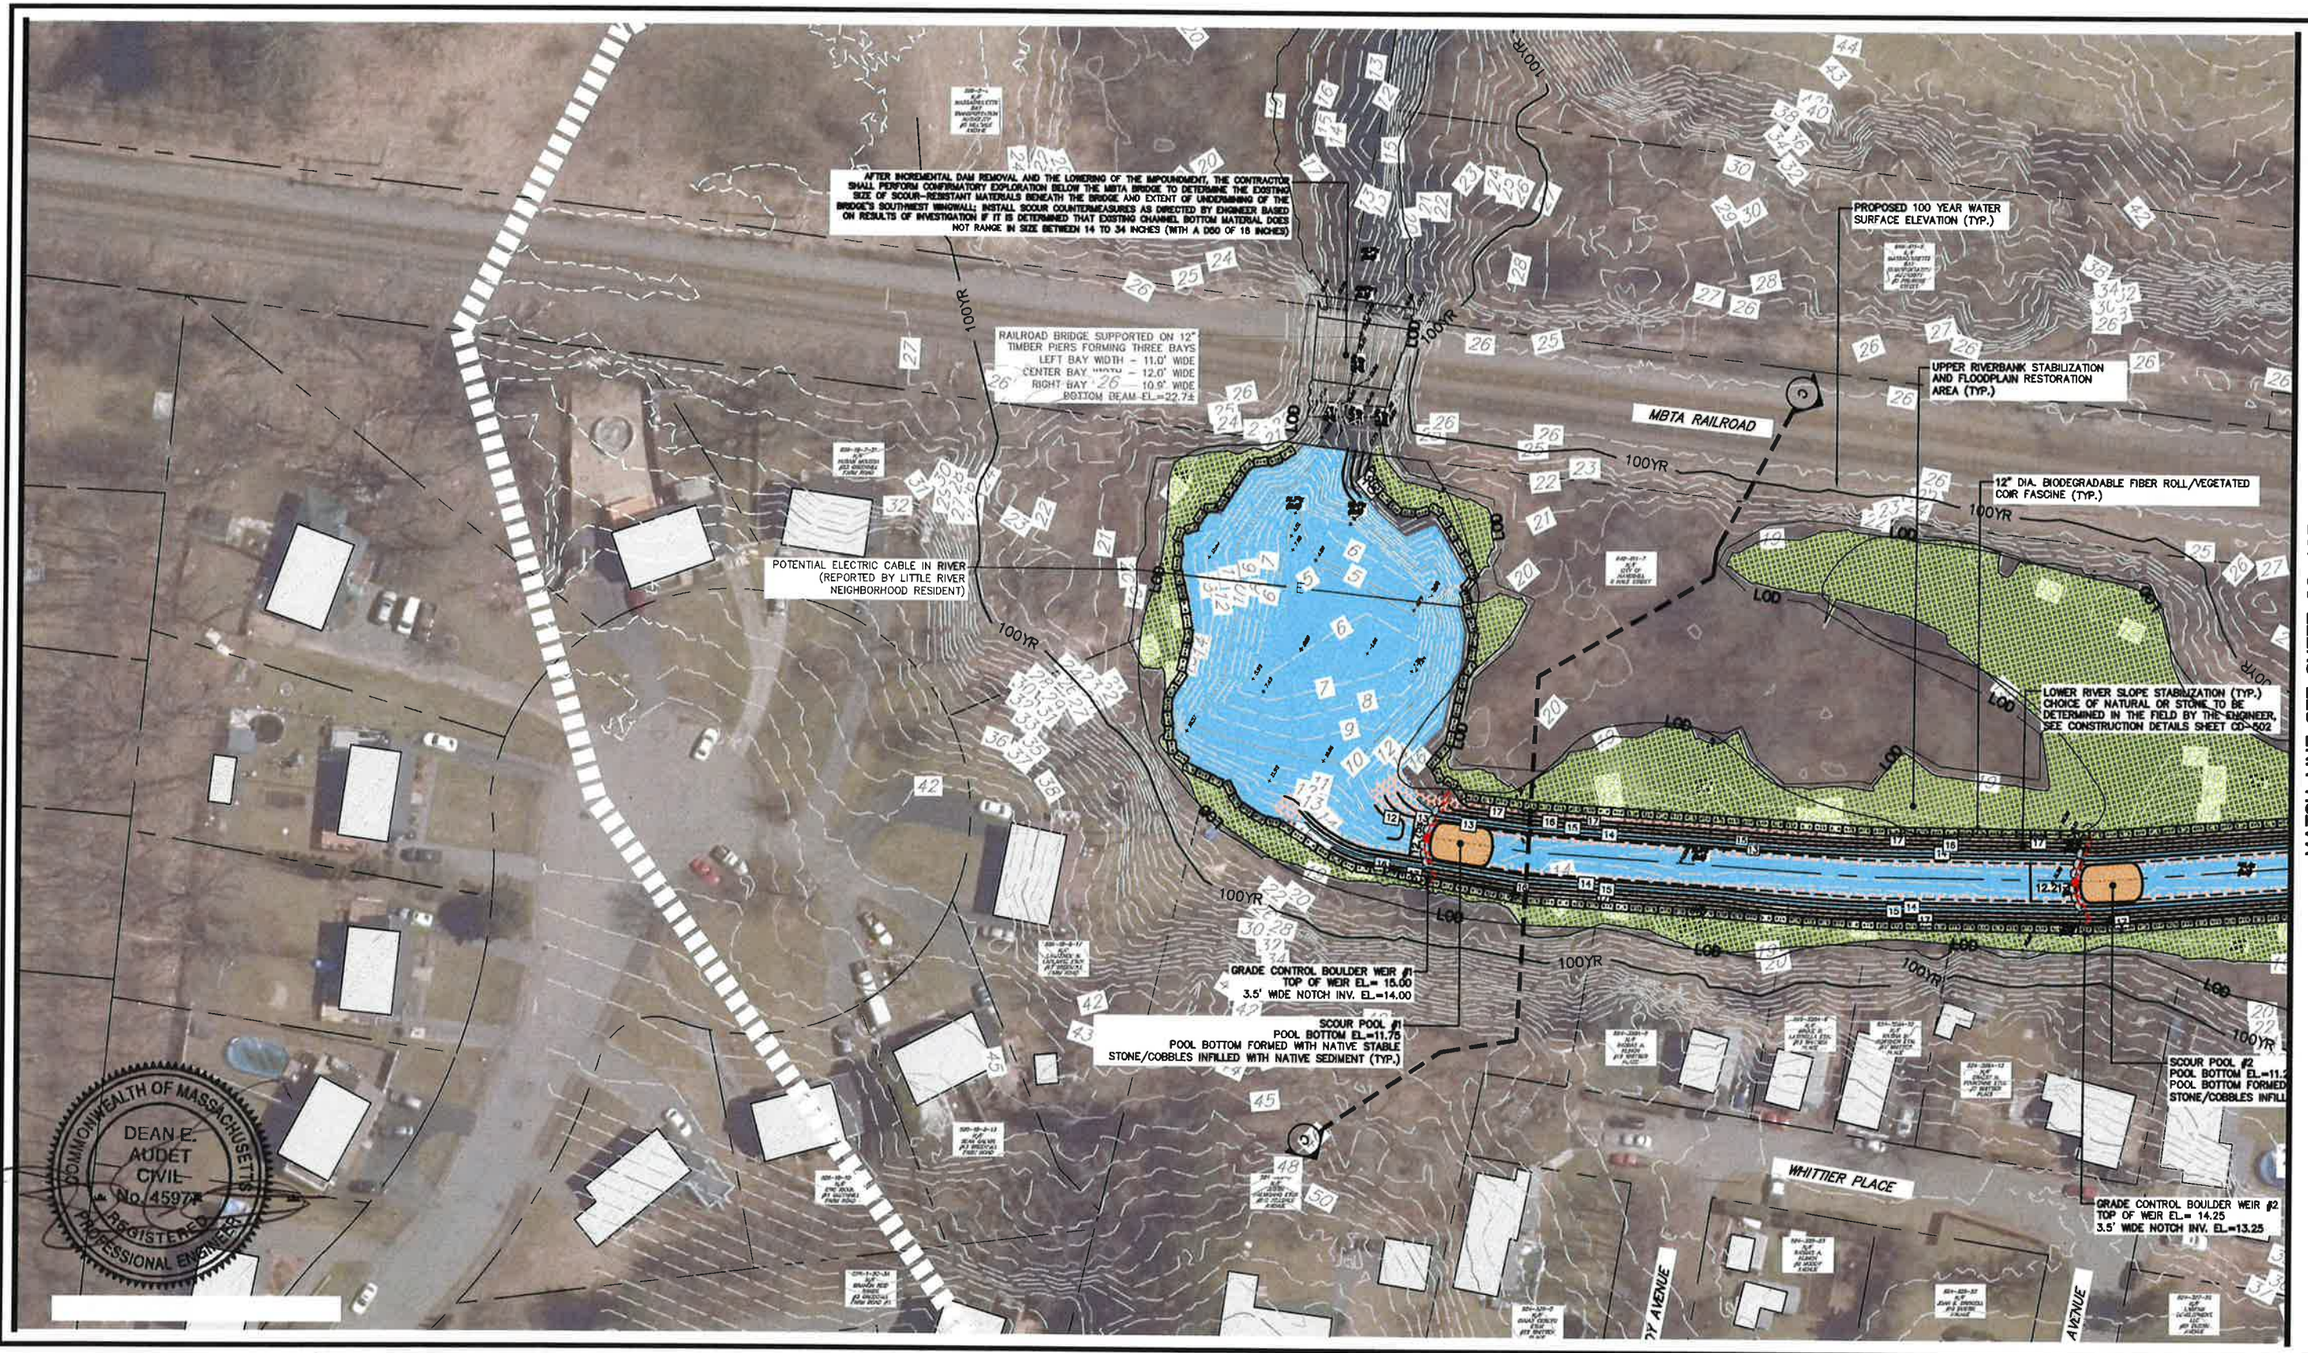

COMMONWEALTH OF MASSACHUSETTS
DEAN E. AUDET
CIVIL
No. 45974
REGISTERED PROFESSIONAL ENGINEER

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ.: 1" = 70'
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0 35 70
GRAPHIC SCALE

CITY OF HAVERHILL

SITE LAYOUT AND GRADING PLAN NO. 4

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

CG-104

MATCH LINE SEE SHEET CG-104

PROPOSED 100 YEAR WATER SURFACE ELEVATION (TYP.)

PEDESTRIAN BRIDGE
TOP OF BRIDGE EL.=26.5±
BOTTOM OF BRIDGE EL.=25.0±(MIN.)

MBTA RAILROAD

GRADE CONTROL BOULDER WEIR #3
TOP OF WEIR EL.= 13.59
3.5' WIDE NOTCH INV. EL.=12.59

FISHING AREA AND ACCESS WITH STEPS/TERRACES TO PROVIDE ACCESS TO RIVER AT VARYING WATER LEVELS (SEE LANDSCAPE PLAN FOR DETAILS); TOP OF PLATFORM EL.= 19.00

GRADE CONTROL BOULDER WEIR #4
TOP OF WEIR EL.= 12.80
3.5' WIDE NOTCH INV. EL.=11.80

SCOUR POOL #4
POOL BOTTOM EL.=9.70
POOL BOTTOM FORMED WITH NATIVE STABLE STONE/COBBLES INFILLED WITH NATIVE SEDIMENT (TYP.)

MBTA RAILROAD

COMPACTED GRAVEL WALKING TRAIL EL. 23.0±

WITH NATIVE STABLE
D WITH NATIVE SEDIMENT (TYP.)

REINFORCED GRAVEL ACCESS/WALKWAY TO FISHING AREA ACCESS

SKATE PARK

CASHMAN'S FIELD

REINFORCED GRAVEL KAYAK/CANOE LAUNCH ACCESS (MAX. SLOPE 15%) WITH

LEBLANC STREET

CASHMAN'S FIELD

100YR

LOD

WET

COMMONWEALTH OF MASSACHUSETTS
DEAN E. ADDET
CIVIL
No. 45077
REGISTERED PROFESSIONAL ENGINEER

MATCH LINE SEE SHEET CG-102

File: J:\DWG\P2017\0350\U30\Civil\Plan\20170390U30_STP01.dwg Layout: 11X17-CG-103 Plotted: 2022-12-08 3:18 PM Saved: 2022-12-08 3:11 PM User: CNauman
PC3 AUTOCAD PDF (GENERAL DOCUMENTATION).PC3 STB/CTB: FO HALF.STB
LAYER STATE:
MS VIEW:

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ.: 1" = 70'
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0 35 70
GRAPHIC SCALE

CITY OF HAVERHILL

SITE LAYOUT AND GRADING PLAN NO. 3

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

CG-103

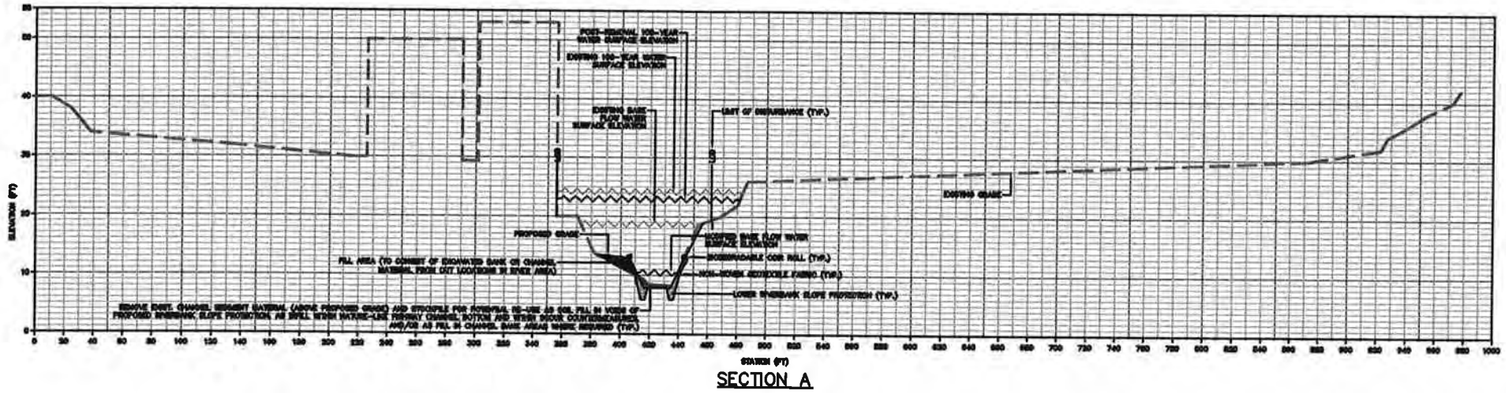

SECTION A

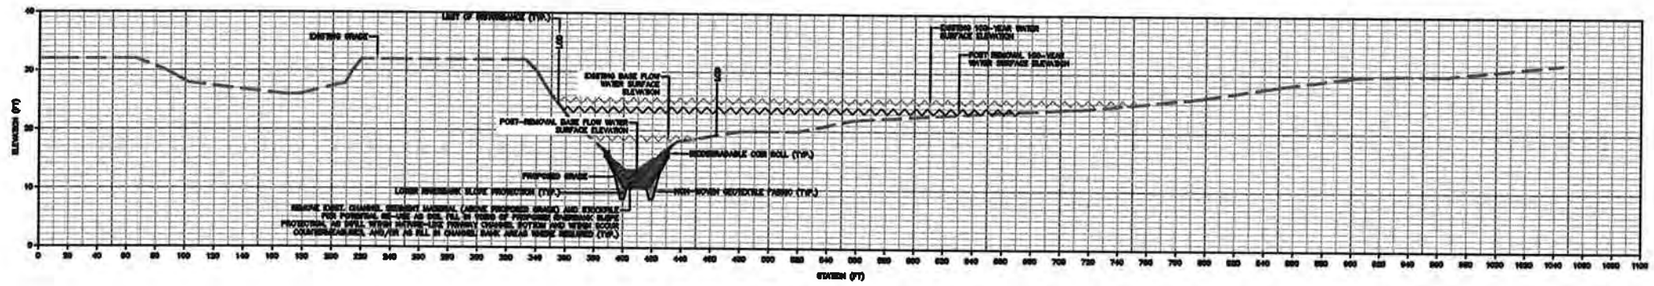

SECTION B

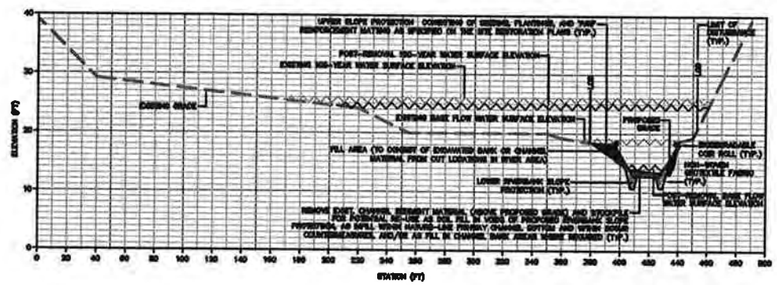

SECTION C

COMMONWEALTH OF MASSACHUSETTS
DEAN E. AUDET
CIVIL
No. 45977
REGISTERED PROFESSIONAL ENGINEER

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ.: 1" = 100'
VERT.: 1" = 25'
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0 35 70
GRAPHIC SCALE

FUSS & O'NEILL
1550 MAIN STREET, SUITE 400
SPRINGFIELD, MA 01103
413.452.0445
www.fando.com

CITY OF HAVERHILL

TYPICAL CHANNEL CROSS SECTIONS

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

CX-301

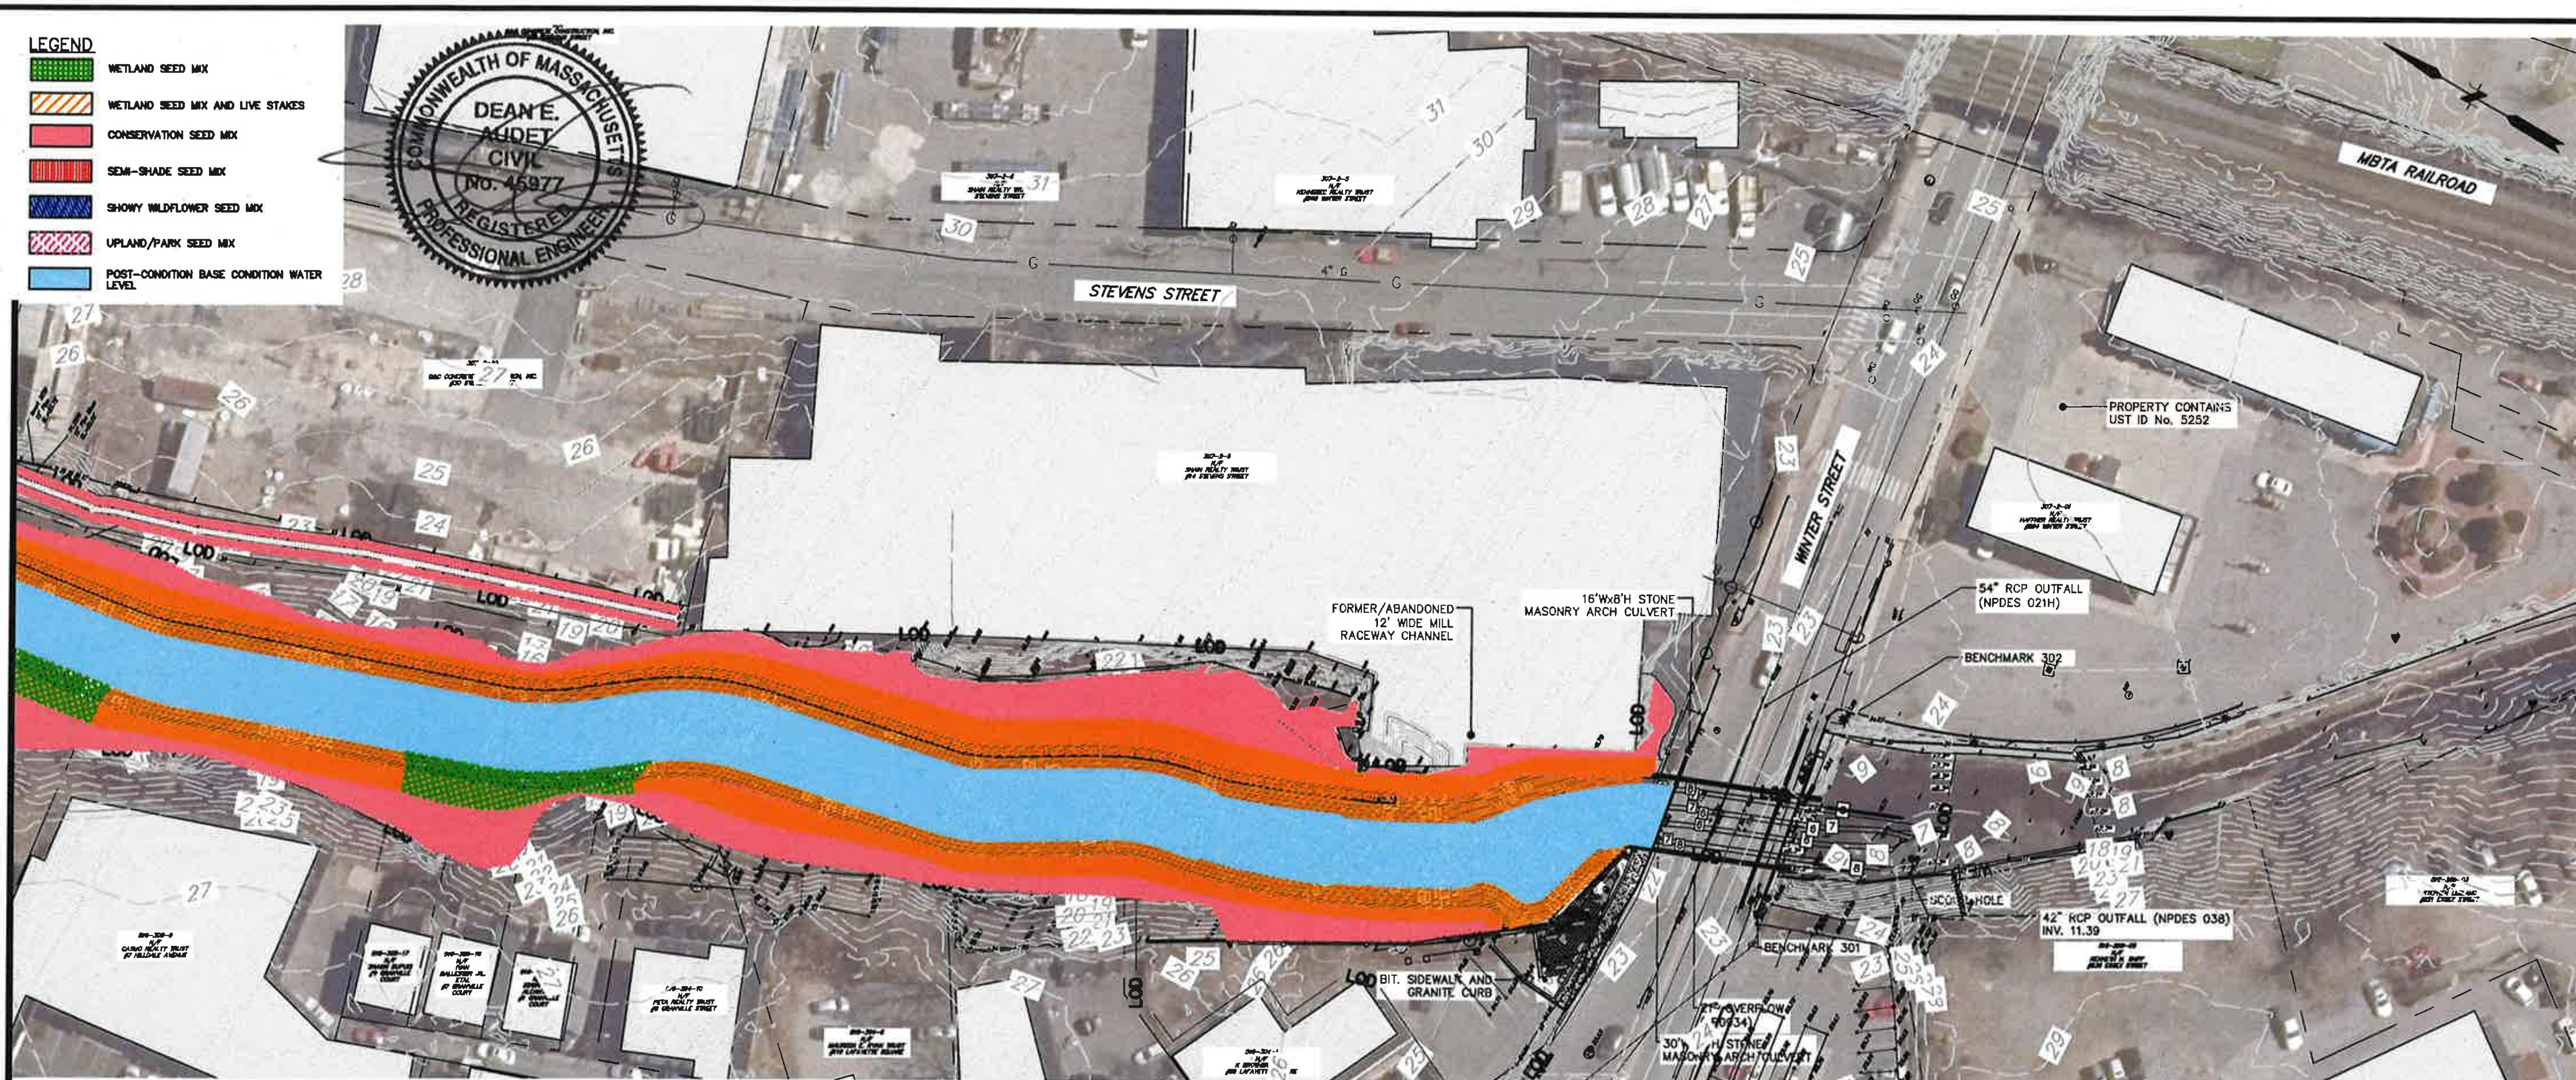

NEW ENGLAND WETMIX (WETLAND SEED MIX)

BOTANICAL NAME	COMMON NAME	IND.
CAREX VULPINOIDEA	FOX SEDGE	OBL
CAREX LURIDA	LURID SEDGE	OBL
CAREX SCOPARIA	BLUNT BROOM SEDGE	FACW
SCIRPUS ATROVIRENS	GREEN BULRUSH	OBL
POA PALUSTRIS	FOWL BLUEGRASS	FACW
CAREX LUPULINA	HOP SEDGE	OBL
BIDENS FRONDOSA	BEGGAR TICKS	FACW
VERNONIA NOVEBORACENSIS	NEW YORK IRONWEED	FACW
CAREX CRINITA	FRINGED SEDGE	OBL
JUNCUS EFFUSUS	SOFT RUSH	FACW
GLYCERIA GRANDIS	AMERICAN MANNAGRASS	OBL
EUPATORIUM MACULATUM	SPOTTED JOE PYE WEED	FACW
ASTER LATERIFLORUS	STARVED/CALICO ASTER	FACW
ASCLEPIAS INCARNATA	SWAMP MILKWEED	OBL
MIMULUS RINGENS	SQUARE STEMMED MONKEY FLOWER	OBL
IRIS VERSICOLOR	BLUE FLAG	OBL

WETLAND SEED MIX
MIXTURE: WETLAND SEED MIX
ANNUAL RYEGRASS (TEMPORARY COVER)
APPLICATION RATE: ANNUAL RYEGRASS = 25 LBS/ACRE
WETLAND SEED MIX = 18 LBS/ACRE

NEW ENGLAND CONSERVATION/WILDLIFE MIX (CONSERVATION SEED MIX)

BOTANICAL NAME	COMMON NAME	IND.
ELYMUS VIRGINICUS	VIRGINIA WILD RYE	FACW
SCHIZACHYRIUM SCOPARIUM	LITTLE BLUESTEM	FACU
ANDROPOGON GERARDII	BIG BLUESTEM	FAC
FESTUCA RUBRA	RED FESCUE	FACU
PANICUM VIRGATUM	SWITCH GRASS	FAC
CHAMAECRISTA FASCICULATA	PARTRIDGE PEA	FACU
DESMODIUM CANADENSE	SHOWY TICK TREFOIL	FAC
SORGHASTRUM NUTANS	INDIAN GRASS	UPL
ASCLEPIAS TUBEROSA	BUTTERFLY MILKWEED	NI
BIDENS FRONDOSA	BEGGAR TICKS	FACW
RUDBECKIA HIRTA	BLACK EYED SUSAN	FACU
EUPATORIUM PURPUREUM	PURPLE JOE PYE WEED	FAC
ASTER PILOSUS	HEATH OR HAIRY ASTER	UPL
SOLIDAGO JUNCEA	EARLY GOLDENROD	NI

CONSERVATION SEED MIX
MIXTURE: CONSERVATION MIX
ANNUAL RYEGRASS (TEMPORARY COVER)
APPLICATION RATE: ANNUAL RYEGRASS = 25 LBS/ACRE
CONSERVATION SEED MIX = 25 LBS/ACRE

NEW ENGLAND SEMI-SHADE GRASS AND FORBS MIX (SEMI-SHADE SEED MIX)

BOTANICAL NAME	COMMON NAME	IND.
ELYMUS VIRGINICUS	VIRGINIA WILD RYE	FACW
ELYMUS CANADENSIS	CANADA WILD RYE	FACU
FESTUCA RUBRA	RED FESCUE	FACU
CHAMAECRISTA FASCICULATA	PARTRIDGE PEA	FACU
LIATRIS SPICATA	SPIKED GAYFEATHER/MARSH BLAZING STAR	FAC
ONOCLEA SENSIBILIS	SENSITIVE FERN	FACW
ASTER PRENANTHOIDES	ZIGZAG ASTER	FAC
EUPATORIUM FISTULOSUM	HOLLOW-STEM JOE PYE WEED	FACW
EUPATORIUM PERFOLIATUM	BONESET	FACW
JUNCUS TENUIS	PATH RUSH	FAC

SEMI-SHADE SEED MIX
APPLICATION RATE: SEMI-SHADE SEED MIX = 30 LBS/ACRE

NEW ENGLAND SHOWY WILDFLOWER MIX (SHOWY WILDFLOWER SEED MIX)

BOTANICAL NAME	COMMON NAME	IND.
SCHIZACHYRIUM SCOPARIUM	LITTLE BLUESTEM	FACU
CHAMAECRISTA FASCICULATA	PARTRIDGE PEA	FACU
SORGHASTRUM NUTANS	INDIAN GRASS	UPL
FESTUCA RUBRA	RED FESCUE	FACU
ELYMUS CANADENSIS	CANADA WILD RYE	FACU
ELYMUS RIPARIUS	RIVERBANK WILD RYE	FACW
HELIOPSIS HELIANTHOIDES	OX EYE SUNFLOWER	UPL
COREOPSIS LANCEOLATA	LANCE LEAVED COREOPSIS	FACU
RUDBECKIA HIRTA	BLACK EYED SUSAN	FACU
LIATRIS SPICATA	SPIKED GAYFEATHER/MARSH BLAZING STAR	FAC
ASCLEPIAS SYRIACA	COMMON MILKWEED	FACU
VERONIA NOVEBORACENSIS	NEW YORK IRONWEED	FACW
ASTER NOVAE-ANGLIAE	NEW ENGLAND ASTER	FACW
EUPATORIUM PURPUREUM	PURPLE JOE PYE WEED	FAC
ASCLEPIAS TUBEROSA	BUTTERFLY MILKWEED	NI
SOLIDAGO JUNCEA	EARLY GOLDENROD	
EUPATORIUM PERFORLIATUM	BONESET	FACW

SHOW WILDFLOWER SEED MIX
APPLICATION RATE: SHOWY WILDFLOWER SEED MIX = 23 LBS/ACRE

UPLAND/PARK SEED MIX
MIXTURE: SHALL BE IN ACCORDANCE WITH SECTION M.6.03.0-1 OF THE MASSDOT STANDARD SPECIFICATIONS FOR FLAT LAWN GRASS AREAS AND M6.03.0-2 FOR SLOPED LAWN GRASS AREAS.
APPLICATION RATE: 25 LBS/ACRE

RESTORATION NOTES:

1. CONSTRUCTION ACCESS ROUTES AND STAGING AREAS WITHIN CASHMAN'S PARK AREA THAT WERE PREVIOUSLY MAINTAINED AS LAWN AREA SHALL BE COVERED WITH TOPSOIL PRIOR TO SEEDING. ALL SEED MIXES SHALL BE FREE OF INVASIVE NON-NATIVE PLANT SPECIES.
2. AREAS TO BE STABILIZED BETWEEN SEPTEMBER THROUGH NOVEMBER SHALL BE OVERSEEDED WITH WINTER RYE (SECALE CEREALE).
3. STABILIZATION OF DISTURBED AREAS SHALL BE IMPLEMENTED WITHIN 14 DAYS AFTER GRADING OR CONSTRUCTION ACTIVITIES HAVE TEMPORARILY OR PERMANENTLY CEASED.
4. RESTORATION AREAS SHALL BE MULCHED WITH STRAW FOLLOWING SEEDING.

LIVE STAKE SPECIES

Select at least 4 of the following species in equal quantities

Black Willow (Salix nigra; OBL)
Silky Willow (Salix sericea; OBL)
Bebb's Willow (Salix bebbiana; FACW)
Pussy Willow (Salix discolor; FACW)
Speckled Alder (Alnus incana; FACW)
Silky Dogwood (Cornus amomum; FACW)
Red-osier Dogwood (Cornus sericea; NI)

Planting Density: 1 live stake every 3' on center.

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

MS VIEW: LAYER STATE:

SCALE: HORZ.: 1" = 70' VERT.:
DATUM: HORZ.: NAD83 VERT.: NAVD88
0 35 70
GRAPHIC SCALE

FUSS & O'NEILL
1550 MAIN STREET, SUITE 400
SPRINGFIELD, MA 01103
413.452.0445
www.fando.com

CITY OF HAVERHILL
RIVER RESTORATION PLAN NO. 1
LITTLE RIVER DAM REMOVAL AND RESTORATION
HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022
CR-101

File: J:\DWG\P2017\0390\U30\Civil\Plan\20170390U30_RES01.dwg Layout: 11X17-CR-101 Plotted: 2022-12-08 3:19 PM Saved: 2022-12-07 4:02 PM User: CNauman
PC3: AUTOCAD PDF (GENERAL DOCUMENTATION).PC3 STB/CTB: FO HALF.STB

MATCH LINE SEE SHEET CR-103

MATCH LINE SEE SHEET CR-101

COMMONWEALTH OF MASSACHUSETTS
DEAN E. AUDET
CIVIL
No. 45677
REGISTERED PROFESSIONAL ENGINEER

MBTA RAILROAD

STEVENS STREET

LITTLE RIVER STREET

APPLE STREET

BENJAMIN STREET

CLIFF STREET

LOD

FLOODWAY

AA100

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ.: 1" = 70'
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0 35 70
GRAPHIC SCALE

FUSS & O'NEILL
1550 MAIN STREET, SUITE 400
SPRINGFIELD, MA 01103
413.452.0445
www.fando.com

CITY OF HAVERHILL

RIVER RESTORATION PLAN NO. 2

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

CR-102

File: J:\DWG\P20\7\20390\U30\Civil\Plan\20170390U30_RES01.dwg Layout: 11X17-CR-102 Plotted: 2022-12-08 3:19 PM Saved: 2022-12-07 4:02 PM User: CNauman
PC3: AUTOCAD PDF (GENERAL DOCUMENTATION).PC3 ST:\BCTB.FO HALF.STB
LAYER STATE:
MS VIEW:

MATCH LINE SEE SHEET CR-104

MATCH LINE SEE SHEET CR-102

MBTA RAILROAD

MBTA RAILROAD

SKATE PARK

LOD

CASHMAN'S FIELD

LOD CASHMAN'S FIELD

LEBLANC STREET

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ.: 1" = 70'
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0 35 70
GRAPHIC SCALE

FUSS & O'NEILL
1550 MAIN STREET, SUITE 400
SPRINGFIELD, MA 01103
413.452.0445
www.fando.com

CITY OF HAVERHILL

RIVER RESTORATION PLAN NO. 3

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

CR-103

File: J:\DWG\P2017\0390\U30\CivilPlan\20170390U30_RES01.dwg Layout: 11X17-CR-103 Plotted: 2022-12-08 3:19 PM Saved: 2022-12-07 4:02 PM User: CNauman
PC3: AUTOCAD PDF (GENERAL DOCUMENTATION).PC3 STB/CTB: FO HALF.STB
LAYER STATE:
MS VIEW:

RAILROAD BRIDGE SUPPORTED ON 12" TIMBER PIERS FORMING THREE BAYS
LEFT BAY WIDTH – 11.0' WIDE
CENTER BAY WIDTH – 12.0' WIDE
RIGHT BAY WIDTH – 10.9' WIDE
BOTTOM BEAM EL.=22.7±

POTENTIAL ELECTRIC CABLE IN RIVER (REPORTED BY LITTLE RIVER NEIGHBORHOOD RESIDENT)

MBTA RAILROAD

WHITTIER PLACE

MATCH LINE SEE SHEET CR-103

COMMONWEALTH OF MASSACHUSETTS
DEAN E. AVDET
CIVIL
No. 45077
REGISTERED PROFESSIONAL ENGINEER

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ.: 1" = 70'
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0 35 70
GRAPHIC SCALE

FUSS & O'NEILL
1550 MAIN STREET, SUITE 400
SPRINGFIELD, MA 01103
413.452.0445
www.fando.com

CITY OF HAVERHILL

RIVER RESTORATION PLAN NO. 4

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

CR-104

File: J:\DWG\P2017\0390\U30\Civil\Plan\20170390U30_RES01.dwg Layout: 11X17-CR-104 Plotted: 2022-12-08 3:20 PM Saved: 2022-12-07 4:02 PM User: CNauman
PC3: AUTOCAD PDF (GENERAL DOCUMENTATION).PC3 STB/CTB: FO HALF.STB
LAYER STATE:
MS VIEW:

GENERAL WATER CONTROL SYSTEM NOTES:

1. PRIOR TO ANY LAND DISTURBANCE ACTIVITIES, THE CONTRACTOR MUST PHYSICALLY MARK THE LIMITS OF DISTURBANCE IN ACCORDANCE WITH THE APPROVED PLANS.
2. THE TEMPORARY COFFERDAMS, RIVER CROSSINGS, AND HAUL ROADS MUST BE INSTALLED DURING THE LOW FLOW PERIOD (I.E., THE PERIOD BETWEEN JULY 1 THROUGH OCTOBER 31). COFFERDAMMED AREAS, WHERE APPLICABLE, SHALL BE MAINTAINED TO ALLOW A DRY WORKING CONDITION (NO SEDIMENT PLUME) IN THE WATERCOURSE. SOIL DISTURBANCE IN COFFERDAMMED AREAS OR THE WATERCOURSE MUST TEMPORARILY CEASE IN THE EVENT OF ANY ABNORMALLY HIGH STORMWATER RUNOFF EVENT THAT OVERTOPS THE COFFERDAMS OR TEMPORARY RIVER CROSSINGS.
3. SELECTIVE DEMOLITION/REMOVAL OF THE DAM MUST BE CONDUCTED SEQUENTIALLY TO CONTROL UPSTREAM DRAWDOWN TO NO MORE THAN TWELVE (12) INCHES PER DAY.
4. OBTAIN CONFIRMATORY ELEVATIONS OF THE RIVER CHANNEL BOTTOM ALONG THE PROPOSED ALIGNMENTS OF THE TEMPORARY COFFERDAMS AND RIVER CROSSINGS TO VERIFY EXISTING CONDITIONS AND ACTUAL COFFERDAM HEIGHTS PRIOR TO INSTALLATION.
5. THIS PLAN ILLUSTRATES ONE CONCEPTUAL APPROACH TO WATER CONTROL FOR THE PROJECT. THE CONTRACTOR SHALL SUBMIT A FINAL WATER CONTROL PLAN TO FUSS & O'NEILL AND THE MASSDEP FOR REVIEW WITH ADEQUATE TIME FOR THEIR REVIEW AND ACCEPTANCE PRIOR TO THE INITIATION OF CONSTRUCTION.
6. TEMPORARY HAUL ROADS, COFFERDAMS, TEMPORARY RIVER CROSSINGS, AND BYPASS PROVISIONS SHALL BE MAINTAINED THROUGHOUT THE CONSTRUCTION PERIOD TO ENSURE RESPECTIVE COMPONENTS FUNCTION AS INTENDED TO PROTECT ADJACENT PROPERTIES, WETLAND RESOURCES AND DOWNSTREAM WORK AREAS.

PHASE 1A:

1. AFTER MOBILIZING AT CASHMAN PARK AND INSTALLING TEMPORARY EROSION CONTROL MEASURES AT THE PORTION OF THE PARKING LOT OF PARCEL 518-304-1 (SAM'S FOOD STORE PROPERTY) AND CASHMAN PARK AREA WITHIN THE LIMIT OF DISTURBANCE, THE CONTRACTOR SHALL INSTALL FLOATING TURBIDITY BARRIER JUST UPSTREAM OF THE WINTER STREET BRIDGE OPENING. THE FLOATING TURBIDITY BARRIER MUST BE A TYPE III BARRIER CAPABLE OF PASSING FLOW VELOCITIES UP TO 3 FEET PER SECOND.
2. THE CONTRACTOR SHALL THEN INSTALL THE TEMPORARY CONSTRUCTION ACCESS TO THE RIVER AT PARCEL 518-304-1, REMOVE 20-FOOT SECTION OF THE FREESTANDING PORTION OF THE PARKING LOT RETAINING WALL BEHIND THE SAM'S STORE BUILDING STRUCTURE (OR AS REQUIRED AND APPROVED BY OWNER TO FACILITATE ACCESS), AND CONSTRUCT TEMPORARY STONE RIPRAP ACCESS DOWN THE SLOPE (AT NO STEEPER THAN 2H:1V) IN ORDER TO GAIN ACCESS TO THE IMPOUNDMENT JUST UPSTREAM OF THE DAM FROM PARCEL 518-304-1 FOR CONSTRUCTION EQUIPMENT AND/OR BARGE ACCESS TO DAM. THE STONE RIPRAP USED TO CONSTRUCT THE TEMPORARY STONE RIPRAP ACCESS SHALL BE CONSTRUCTED OF SAME STONE MATERIAL USED TO PERMANENTLY STABILIZE THE LOWER SLOPE OF THE PROPOSED RIVER CHANNEL SIDESLOPES. THIS STONE IS TO REMAIN STABLE DURING FLOOD FLOWS.
3. USING SIPHONS AND/OR PUMPS, INCREMENTALLY LOWER THE IMPOUNDMENT BY 12-INCHES PER DAY TO DOWN TO EL. 14.5 FEET. THIS SHOULD TAKE APPROXIMATELY 4 WORK DAYS ASSUMING NO SUBSTANTIAL RAINFALL EVENTS OCCUR. THIS WILL ALSO ALLOW THE NEWLY EXPOSED AREAS ALONG THE RIVER BANK TIME TO BEGIN TO DRAIN AND STABILIZE.
4. ONCE THE BASE CONDITION WATER SURFACE WITHIN THE IMPOUNDMENT HAS BEEN LOWERED TO EL. 14.5 FEET, REMOVE A 50-FOOT SECTION OF THE UPPER PORTION OF THE DAM USING BARGE MOUNTED EQUIPMENT OR BY CRANE FROM ADJACENT PARKING LOT (ON PARCEL 518-304-1) DOWN TO EL. 14.50 FEET, DO NOT DISTURB SECTION OF DAM WITHIN 10-FEET OF ITS CONNECTION TO BUILDING ON RIVER LEFT AND WITHIN 10-FEET OF ITS CONNECTION TO RIVER WALL ON RIVER RIGHT. THIS WILL BE CONSIDERED THE FIRST PHASE OF THE INCREMENTAL REMOVAL OF THE DAM. REMOVING THE DAM INCREMENTALLY WILL MINIMIZE THE POTENTIAL FOR SEDIMENT TO MOBILIZE DOWNSTREAM, ALLOW THE BED AND NEWLY EXPOSED BANKS OF THE IMPOUNDMENT AND STREAM TO DRAIN AND STABILIZE, AND PREVENT A SUDDEN RELEASE OF WATER WHICH COULD UNNECESSARILY DAMAGE DOWNSTREAM INFRASTRUCTURE AND/OR HABITAT.

PHASE 1B:

1. ONCE THE BASE FLOW CONDITION WATER SURFACE ELEVATION IS LOWERED TO APPROXIMATELY EL. 15.0 WITHIN THE ENTIRE IMPOUNDMENT FROM THE DAM UP TO THE MBTA BRIDGE, CONSTRUCT TEMPORARY RIVER CROSSING AT CASHMAN'S PARK (WITH A TOP WIDTH OF 12 FEET). THIS RIVER CROSSING WILL BE CONSTRUCTED OF STONE RIPRAP EQUIVALENT IN SIZE TO THAT USED TO STABILIZE THE LOWER SIDESLOPES OF THE PROPOSED RIVER CHANNEL. THE CROSSING WILL BE CONSTRUCTED WITH (4) 48-INCH CULVERTS THAT WILL PASS APPROXIMATELY 380 CFS AT FULL CAPACITY. THIS FLOW IS EQUIVALENT TO THE BANKFULL FLOW. BANKFULL FLOW CONDITIONS ARE APPROXIMATELY EQUIVALENT TO THE 1.5-YEAR RECURRENCE INTERVAL FLOOD EVENT. INLET CONTROL DEVICES SHALL BE INSTALLED ON UPSTREAM ENDS OF CULVERTS TO ALLOW FOR THE REGULATION OF FLOW THROUGH CULVERTS.
2. ONCE CONSTRUCTION OF THE TEMPORARY RIVER CROSSING IS COMPLETE, CONTINUE CONSTRUCTION OF A STONE ACCESS/HAUL ROAD (WITH A 10-FOOT MINIMUM TOP WIDTH) BETWEEN THE TEMPORARY RIVER CROSSING AND THE AREA OF SEDIMENT CONTAMINATION. THE TEMPORARY HAUL ROAD WILL FOLLOW THE ALIGNMENT OF THE TOP OF LEFT BANK OF THE PROPOSED RIVER CHANNEL. AS A RESULT, CONSTRUCTING THIS HAUL ROAD WILL ALSO ASSIST IN FORMING A STABLE LEFT BANK FOR THE PROPOSED RIVER CHANNEL.
3. ONCE THE HAUL ROAD HAS BEEN BUILT TO THE APPROXIMATE AREA OF SEDIMENT CONTAMINATION, CONSTRUCT A TEMPORARY RIVER CROSSING (WITH A 12-FOOT TOP WIDTH) JUST UPSTREAM OF THE AREA NEAR LITTLE RIVER STREET. THE ROAD SHALL BE CONSTRUCTED FROM THE TEMPORARY HAUL ROAD AS OPPOSED TO CONSTRUCTING FROM LITTLE RIVER STREET. THIS TEMPORARY RIVER CROSSING WILL BE CONSTRUCTED OF STONE RIPRAP EQUIVALENT IN SIZE TO THAT USED TO STABILIZE THE LOWER SIDESLOPES OF THE PROPOSED RIVER CHANNEL. THE CROSSING WILL BE CONSTRUCTED WITH (4) 48-INCH CULVERTS THAT WILL PASS APPROXIMATELY 380 CFS AT FULL CAPACITY. THE PURPOSE OF THIS CROSSING WILL BE TO GAIN ACCESS TO BOTH SIDES OF THE RIVER CHANNEL FOR SEDIMENT REMOVAL AND TO CONSTRUCT IN-CHANNEL RIVER IMPROVEMENTS.
4. USING LARGE SANDBAGS OR EQUAL, CONSTRUCT A TEMPORARY COFFERDAM DOWN THE APPROXIMATE CENTER OF THE RIVER CHANNEL BETWEEN THE TEMPORARY RIVER CROSSING AND DOWNSTREAM LIMIT OF CONTAMINATED SEDIMENT AREA. CAP/BLOCK THE INLET TO THE EASTERN CULVERTS AND ISOLATE THE EASTERN HALF OF THE RIVER USING COFFERDAM SYSTEM. ONLY ALLOW FLOW THROUGH THE WESTERN CULVERTS. INSTALL TEMPORARY DEWATERING AREA ATOP THE WESTERN HALF OF THE TEMPORARY RIVER CROSSING AND UTILIZE CONSTRUCTION DEWATERING PUMPS TO CREATE A DRY WORKING AREA WITHIN THE LIMITS OF THE COFFERDAM. PERFORM SEDIMENT REMOVAL OPERATIONS. HAUL SEDIMENT TO CASHMAN PARK TEMPORARY SOIL STORAGE AREA FOR DEWATERING AND ULTIMATE TRANSPORT OFF-SITE. THE TOP OF THE COFFERDAM SYSTEM SHALL BE SET TO PROTECT WORK AREA FOR MAXIMUM RIVER FLOWS OF UP TO APPROXIMATELY 100 CFS (OR 3-FEET FLOW DEPTH THROUGH DIVERTED HALF OF RIVER CHANNEL) AT MINIMUM WITHOUT OVERTOPPING.
5. ONCE CONTAMINATED SEDIMENT HAS BEEN REMOVED IN THE EASTERN HALF OF THE RIVER, ROUGH GRADE LEFT BANK AND CHANNEL BOTTOM IN THIS LOCATION TO PROPOSED GRADE AND STABILIZE WITH LOWER SLOPE PROTECTION AND CHANNEL BOTTOM STABILIZATION MEASURES.
6. REMOVE TEMPORARY DEWATERING AREA ON THE RIVER CROSSING AND SHIFT TO THE UPPER LEFT BANK OF RIVER AT EL. 17.5± FEET OR ABOVE. ADJUST TEMPORARY COFFERDAM SYSTEM TO ISOLATE THE WESTERN SIDE OF RIVER. SLOWLY ALLOW FLOW THROUGH THE EASTERN CULVERTS AND CAP/BLOCK WESTERN CULVERTS. UTILIZE CONSTRUCTION DEWATERING PUMPS TO CREATE A DRY WORKING AREA WITHIN WESTERN COFFERDAMMED AREA. PERFORM SEDIMENT REMOVAL OPERATIONS IN WESTERN HALF OF RIVER. HAUL SEDIMENT TO CASHMAN PARK TEMPORARY SOIL STORAGE AREA FOR DEWATERING AND ULTIMATE TRANSPORT OFF-SITE. ONCE CONTAMINATED SEDIMENT HAS BEEN REMOVED, ROUGH GRADE RIGHT BANK AND CHANNEL BOTTOM TO PROPOSED GRADE AND STABILIZE WITH LOWER SLOPE PROTECTION AND CHANNEL BOTTOM STABILIZATION MEASURES.
7. ONCE IN-RIVER IMPROVEMENTS ARE COMPLETE IN THIS LOCATION, REMOVE TEMPORARY COFFERDAM SYSTEM AND TEMPORARY RIVER CROSSING (WITH CULVERTS) AT LITTLE RIVER STREET AREA. STONE RIPRAP USED TO CONSTRUCT TEMPORARY RIVER CROSSING CAN BE USED ELSEWHERE AS STABILIZATION FOR LOWER RIVER CHANNEL SLOPE AND CHANNEL BOTTOM PROTECTION OF RIVER CHANNEL.

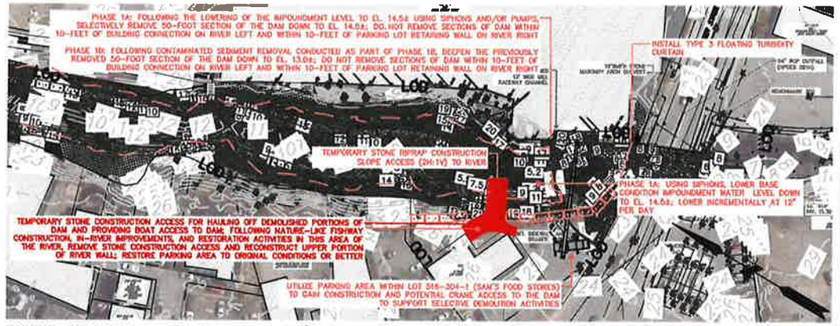

WATER CONTROL – PHASE 1A & 1B (INCREMENTAL REMOVAL OF DAM AND LOWERING OF HEADPOND)

SCALE: 1"= 140'

PHASE 1C:

1. ONCE CONTAMINATED SEDIMENT HAS BEEN FULLY REMOVED, CONTINUE CONSTRUCTION OF STONE ACCESS/HAUL ROAD (WITH A 10-FOOT TOP WIDTH) BETWEEN THE TEMPORARY RIVER CROSSING AT CASHMAN PARK AND THE UPSTREAM LIMIT OF PROPOSED CONSTRUCTION. THIS PORTION OF THE TEMPORARY HAUL ROAD WILL ALSO FOLLOW THE ALIGNMENT OF THE TOP OF LEFT BANK OF THE PROPOSED RIVER CHANNEL. AS A RESULT, CONSTRUCTING THIS HAUL ROAD WILL ALSO ASSIST IN FORMING A STABLE LEFT BANK FOR THE PROPOSED RIVER CHANNEL. CONSTRUCT TEMPORARY RIVER CROSSING WITH A 12-FOOT TOP WIDTH AND WITH (4) 48-INCH CULVERTS JUST UPSTREAM OF PROPOSED UPSTREAM GRADE CONTROL BOULDER SYSTEM AND SCOUR POOL. INSTALL CULVERTS WITH INLET AND/OR OUTLET CONTROL DEVICES THAT WILL ALLOW FLOW TO BE REGULATED. CONSTRUCTING THIS SYSTEM WILL ASSIST IN MINIMIZING UPSTREAM IMPACTS DURING THIS PHASE OF CONSTRUCTION.
2. FOLLOWING CONSTRUCTION OF THE UPSTREAM TEMPORARY RIVER CROSSING, PERFORM THE SECOND PHASE OF INCREMENTAL DAM REMOVAL. LOWER THE DAM CREST FROM EL. 14.5± FEET DOWN TO EL. 12.0±. THIS WILL LOWER THE BASE FLOW CONDITION WATER SURFACE ELEVATION TO BETWEEN APPROXIMATELY EL. 12.0± AND EL. 13.5± WITHIN THE ENTIRE IMPOUNDMENT FROM THE DAM UP TO THE UPSTREAM RIVER CROSSING.
3. CONSTRUCT LARGE SANDBAG OR SIMILAR COFFERDAM SYSTEM DOWN THE APPROXIMATE CENTER OF THE RIVER CHANNEL BETWEEN THE UPSTREAM TEMPORARY RIVER CROSSING AND THE TEMPOORARY RIVER CROSSING AT CASHMAN PARK. CAP/BLOCK THE INLET TO THE EASTERN CULVERTS AND ISOLATE THE EASTERN HALF OF THE RIVER USING COFFERDAM SYSTEM. ONLY ALLOW FLOW THROUGH THE WESTERN CULVERTS. CONSTRUCT IN-RIVER IMPROVEMENTS AND LOWER BANK STABILIZATION MEASURES. CONSTRUCTING THIS SYSTEM WILL ASSIST IN MINIMIZING TEMPORARY UPSTREAM IMPACTS THROUGHOUT THE REMAINDER OF CONSTRUCTION. THE TOP OF THE COFFERDAM SYSTEM SHALL BE SET TO PROTECT WORK AREA FOR MAXIMUM RIVER FLOWS OF UP TO APPROXIMATELY 100 CFS (OR 3-FEET FLOW DEPTH THROUGH DIVERTED HALF OF RIVER CHANNEL) AT MINIMUM WITHOUT OVERTOPPING.
4. PERFORM RIVER CHANNEL IMPROVEMENTS BETWEEN THE UPSTREAM RIVER CROSSING AND THE FORMER AREA OF SEDIMENT CONTAMINATION AS INDICATED IN THE CONTRACT DOCUMENTS INCLUDING CHANNEL REALIGNMENT (INCLUDING SEDIMENT EXCAVATION AND RELOCATION), INSTALL GRADE CONTROL BOULDER WEIR NOS. 1 THRU 5, SCOUR POOL NOS. 1 THRU 5, LOWER AND UPPER SLOPE STABILIZATION MEASURES, FISHING PLATFORM AT CASHMAN PARK BELOW THE BANKFULL ELEVATION, AND VEGETATIVE RESTORATION MEASURES (I.E. SEEDING, AT MINIMUM, PRIOR TO WINTER SHUTDOWN).

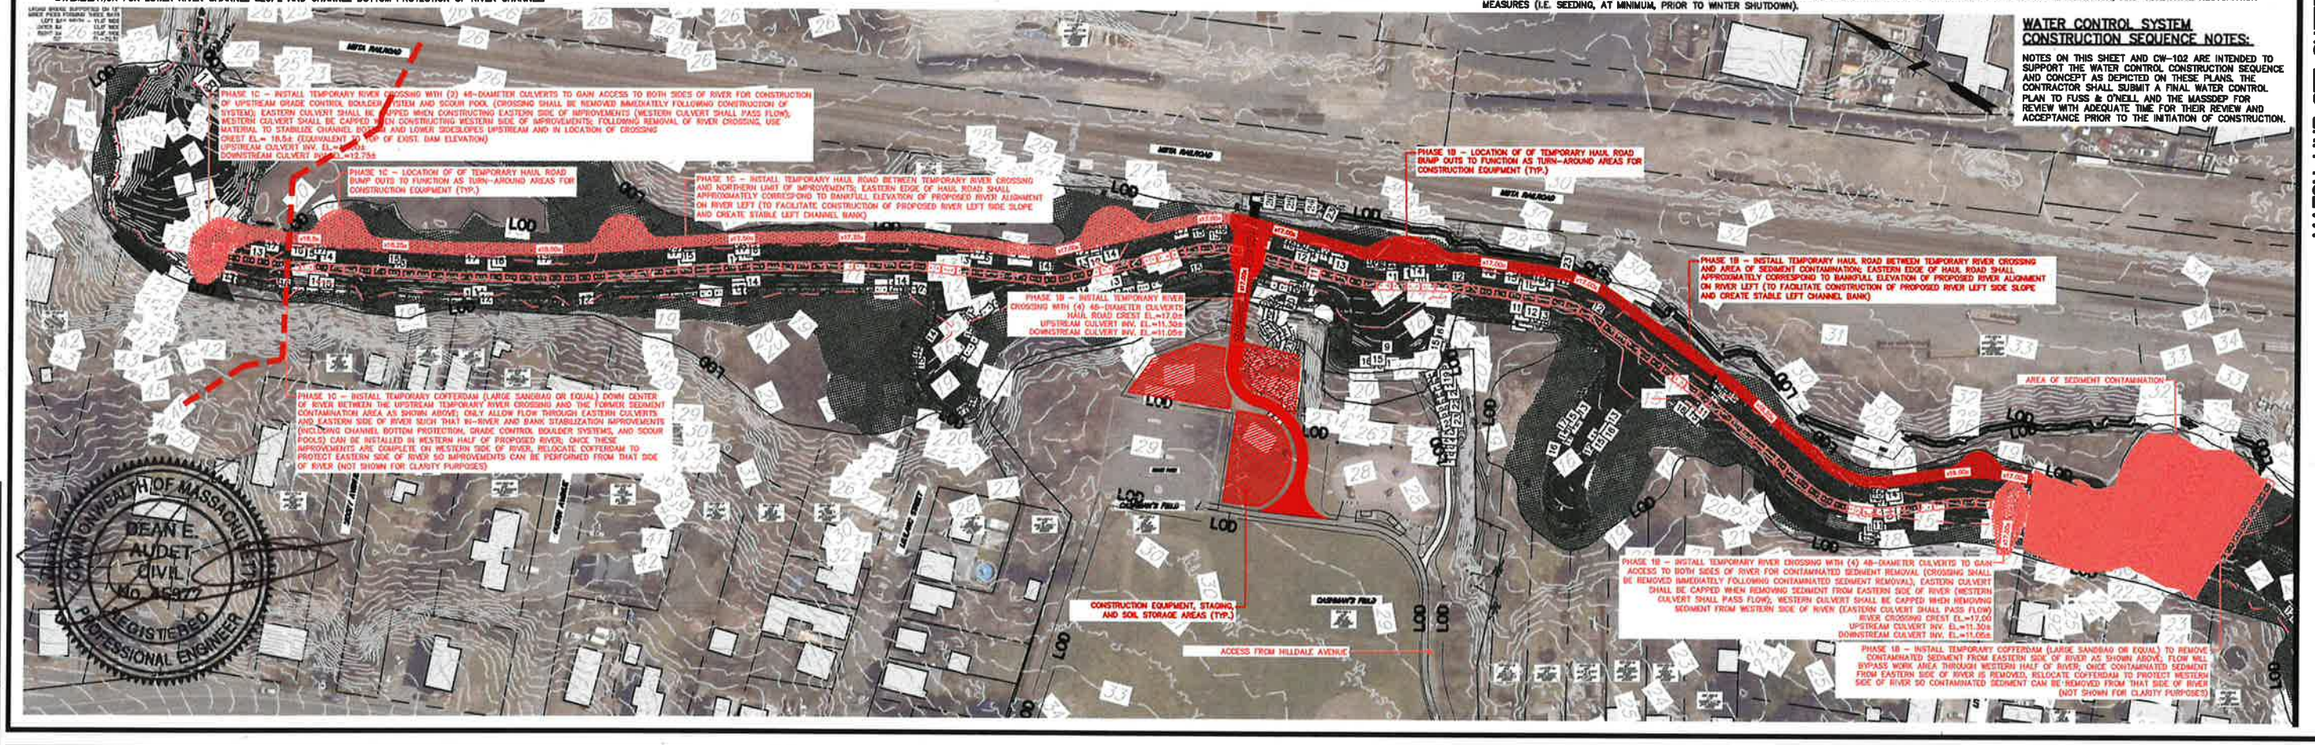

WATER CONTROL SYSTEM CONSTRUCTION SEQUENCE NOTES:

NOTES ON THIS SHEET AND CW-102 ARE INTENDED TO SUPPORT THE WATER CONTROL CONSTRUCTION SEQUENCE AND CONCEPT AS DEPICTED ON THESE PLANS. THE CONTRACTOR SHALL SUBMIT A FINAL WATER CONTROL PLAN TO FUSS & O'NEILL AND THE MASSDEP FOR REVIEW WITH ADEQUATE TIME FOR THEIR REVIEW AND ACCEPTANCE PRIOR TO THE INITIATION OF CONSTRUCTION.

MATCH LINE SEE SHEET CW-102

COMMONWEALTH OF MASSACHUSETTS
DEAN E. AUDET
CIVIL
No. 45977
REGISTERED PROFESSIONAL ENGINEER

LAYER STATE:

MS VIEW:

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ.: 1" = 140'
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0 70 140
GRAPHIC SCALE

CITY OF HAVERHILL

WATER CONTROL & CONSTRUCTION SEQUENCING PLAN NO. 1

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

CW-101

MATCH LINE SEE SHEET CW-101

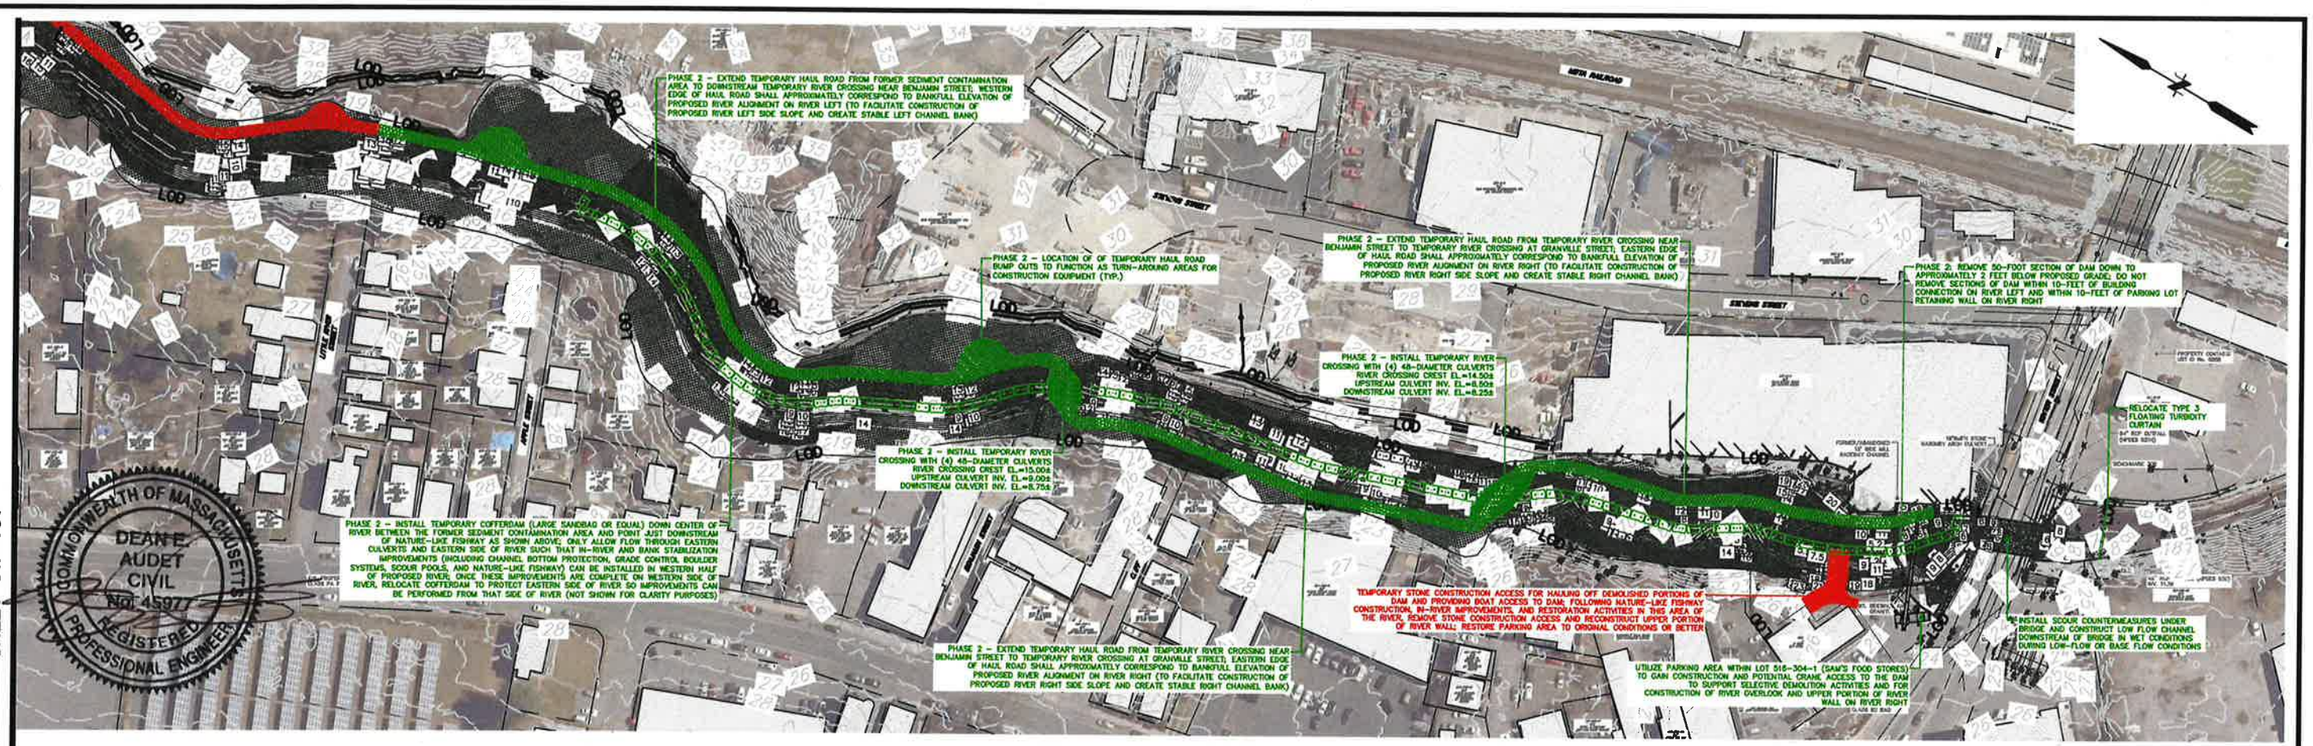

WATER CONTROL – PHASE 2
SCALE: 1"= 140'

NOTE:
PROPOSED LAYOUT SHOWN HEREON IS APPROXIMATE ONLY AND IS INTENDED TO ONLY DEPICT RELATIVE PHASES OF WORK AND GENERAL WORK AREAS. REFER TO OTHER DRAWINGS FOR SPECIFIC WORK ACTIVITIES AND LIMITS.

OUT OF RIVER CONSTRUCTION ACTIVITIES (TO BE PERFORMED OUTSIDE OF LOW-FLOW SEASONS):

1. AT THE END OF THE LOW FLOW SEASON, THE CONTRACTOR SHALL CEASE PHASE I IN-RIVER CONSTRUCTION ACTIVITIES.
2. WORK OUTSIDE OF THE RIVER, HOWEVER, SHALL CONTINUE SUCH AS THE CONSTRUCTION OF THE UPPER PORTION OF THE RIVER WALL ALONG PARCEL 516-304-1. PEDESTRIAN BRIDGE AT CASHMAN PARK, THE GRAVEL WALKING TRAIL ON EASTERN SIDE OF RIVER, AND THE FISHING PLATFORM AT CASHMAN PARK.

PHASE 2:

1. AT THE START OF THE SECOND LOW-FLOW SEASON, EXTEND TEMPORARY STONE ACCESS/HAUL ROAD (WITH A 12-FOOT TOP WIDTH) FROM THE SOUTHERN LIMIT OF THE PREVIOUSLY CONSTRUCTED HAUL ROAD ON RIVER LEFT TO THE LOCATION OF PROPOSED TEMPORARY RIVER CROSSING NEAR BENJAMIN ROAD AS SHOWN ABOVE. THE TEMPORARY HAUL ROAD WILL FOLLOW THE ALIGNMENT OF THE TOP OF LEFT BANK OF THE PROPOSED RIVER CHANNEL. AS A RESULT, CONSTRUCTING THIS HAUL ROAD WILL ALSO ASSIST IN FORMING A STABLE LEFT BANK FOR THE PROPOSED RIVER CHANNEL.
2. CONSTRUCT TEMPORARY RIVER CROSSING NEAR BENJAMIN STREET TO FACILITATE ACCESS TO RIVER RIGHT. THIS RIVER CROSSING WILL BE CONSTRUCTED OF STONE RIPRAP EQUIVALENT IN SIZE TO THAT USED TO STABILIZE THE LOWER SIDESLOPES OF THE PROPOSED RIVER CHANNEL. THE CROSSING WILL BE CONSTRUCTED WITH (4) 48-INCH CULVERTS THAT WILL PASS APPROXIMATELY 380 CFS AT FULL CAPACITY. THIS FLOW IS EQUIVALENT TO THE BASE FLOW CONDITION AND THE BANKFULL FLOW, RESPECTIVELY.
3. ONCE CONSTRUCTION OF THE TEMPORARY RIVER CROSSING IS COMPLETE, CONTINUE CONSTRUCTION OF A STONE ACCESS/HAUL ROAD (WITH A 12-FOOT TOP WIDTH) ON RIVER RIGHT BETWEEN TO THE VICINITY OF GRANVILLE STREET. THE TEMPORARY HAUL ROAD WILL FOLLOW THE ALIGNMENT OF THE TOP OF RIGHT BANK OF THE PROPOSED RIVER CHANNEL. AS A RESULT, CONSTRUCTING THIS HAUL ROAD WILL ALSO ASSIST IN FORMING A STABLE RIGHT BANK FOR THE PROPOSED RIVER CHANNEL.
3. CONSTRUCT SECOND TEMPORARY RIVER CROSSING IN THE VICINITY OF GRANVILLE STREET THAT WILL THEN PROVIDE ACCESS BACK TO RIVER LEFT. THIS RIVER CROSSING WILL ALSO BE CONSTRUCTED OF STONE RIPRAP EQUIVALENT IN SIZE TO THAT USED TO STABILIZE THE LOWER SIDESLOPES OF THE PROPOSED RIVER CHANNEL. THE CROSSING WILL BE CONSTRUCTED WITH (4) 48-INCH CULVERTS THAT WILL PASS APPROXIMATELY 380 CFS AT FULL CAPACITY. ONCE CONSTRUCTION OF THE TEMPORARY RIVER CROSSING IS COMPLETE, CONTINUE CONSTRUCTION OF STONE ACCESS/HAUL ROAD (WITH A 12-FOOT TOP WIDTH) ON RIVER LEFT DOWN TO THE DAM. THE TEMPORARY HAUL ROAD WILL FOLLOW THE ALIGNMENT OF THE TOP OF LEFT BANK OF THE PROPOSED RIVER CHANNEL. AS A RESULT, CONSTRUCTING THIS HAUL ROAD WILL ALSO ASSIST IN FORMING A STABLE LEFT BANK FOR THE PROPOSED RIVER CHANNEL.
4. REMOVE THE REMAINING SECTION OF THE DAM DOWN TO APPROXIMATELY 2 FEET BELOW PROPOSED GRADE. TAKE CARE NOT TO REMOVE SECTIONS OF THE DAM WITHIN 10-FEET OF EXISTING BUILDING CONNECTION (ON RIVER LEFT) AND RETAINING WALL CONNECTION (ON RIVER RIGHT).
5. RELOCATE FLOATING TURBIDITY CURTAIN TO SPAN ACROSS RIVER AT DOWNSTREAM LIMIT OF PROJECT DISTURBANCE.
6. INSTALL SCOUR COUNTERMEASURES BELOW THE WINTER STREET BRIDGE BY PLACING STONE RIPRAP IN THE WET DURING NORMAL (NON-FLOOD) LOW FLOW CONDITIONS.
7. ONCE SCOUR COUNTERMEASURES ARE INSTALLED, ACCESS DOWNSTREAM SIDE OF BRIDGE BY DRIVING LOW-HEIGHT EQUIPMENT (E.G. MINI-EXCAVATOR) BENEATH BRIDGE. SHAPE LOW-FLOW CHANNEL ON DOWNSTREAM SIDE OF BRIDGE AND STABILIZE WITH STONE RIPRAP.
8. REMOVE FLOATING TURBIDITY CURTAIN AND RELOCATE BACK TO LOCATION JUST UPSTREAM OF WINTER STREET BRIDGE OPENING.
9. BEGIN CONSTRUCTION OF NATURE-LIKE FISHWAY AND RIVER WALLS ON BOTH SIDES OF THE RIVER. UTILIZE TEMPORARY COFFERDAMS (LARGE SANDBAGS OR EQUAL) AND CONSTRUCTION DEWATERING PUMPS (WITH CRUSHED STONE SUMPS) TO ISOLATE SECTIONS OF THE RIVER TO FACILITATE THE CONSTRUCTION OF IMPROVEMENTS UNDER DRY-CONDITIONS AS SHOWN ABOVE. INSTALL TEMPORARY DEWATERING AREA ON TEMPORARY HAUL ROAD IF NECESSARY (I.E. IF IT IS DETERMINED THAT TURBID WATER IS BEING DISCHARGED FROM PUMPS AND CRUSHED STONE SUMPS). NOTE THAT COFFERDAM ISOLATING THE RIVER LEFT, WHERE FLOW WOULD BE DIVERTED THROUGH RIGHT SIDE OF RIVER ONLY, IS SHOWN FOR GRAPHICAL PURPOSES ONLY TO MINIMIZE VISUAL CLUTTER. HOWEVER, THE SAME APPROACH WOULD BE APPLIED TO CONSTRUCT IN-RIVER IMPROVEMENTS ON RIVER RIGHT. FLOW WOULD THEN BYPASS THE WORK AREA ON RIVER LEFT.THE TOP OF THE COFFERDAM SYSTEM SHALL BE SET TO PROTECT WORK AREA FOR MAXIMUM RIVER FLOWS OF UP TO APPROXIMATELY 100 CFS (OR 3-FEET FLOW DEPTH THROUGH DIVERTED HALF OF RIVER CHANNEL) AT MINIMUM WITHOUT OVERTOPPING.
10. ONCE CONSTRUCTION OF THE NATURE-LIKE FISHWAY, RIVER WALL ON RIVER LEFT, LOWER PORTION OF THE RIVER WALL ON RIVER RIGHT (TO AN ELEVATION ABOVE THE BANKFULL ELEVATION), AND BANK STABILIZATION MEASURES ARE COMPLETE WITHIN THIS SECTION OF RIVER; FINISH GRADE, STABILIZE, AND RESTORE TEMPORARY HAUL ROAD AREA IN THIS LOCATION AND BEGIN CONSTRUCTION OF IN-RIVER IMPROVEMENTS AND BANK STABILIZATION MEASURES BETWEEN THE GRANVILLE TEMPORARY CROSSING AND THE NATURE-LIKE FISHWAY. UTILIZE TEMPORARY COFFERDAMS AND CONSTRUCTION DEWATERING PUMPS (WITH CRUSHED STONE SUMPS) AS REQUIRED TO ISOLATE SECTIONS OF THE RIVER BETWEEN THE GRANVILLE TEMPORARY CROSSING AND THE NATURE-LIKE FISHWAY TO FACILITATE CONSTRUCTION OF IN-RIVER IMPROVEMENTS UNDER DRY WORKING CONDITIONS. AS SHOWN IN GRAPHIC, A TEMPORARY COFFERDAM COULD BE CONSTRUCTED DOWN THE APPROXIMATE CENTER OF THE RIVER CHANNEL SO THAT IMPROVEMENTS COULD BE CONSTRUCTED ON ONE SIDE OF RIVER WHILE FLOW IS BEING DIVERTED TO OTHER SIDE OF RIVER. THE CULVERTS AT THE UPSTREAM RIVER CROSSING WOULD BE CAPPED/BLOCKED ACCORDINGLY.
11. ONCE CONSTRUCTION OF THE IN-RIVER IMPROVEMENTS AND BANK STABILIZATION MEASURES ARE COMPLETE WITHIN THIS SECTION OF RIVER; REMOVE TEMPORARY RIVER CROSSING NEAR GRANVILLE STREET; FINISH GRADE, STABILIZE, AND RESTORE TEMPORARY HAUL ROAD AREA IN THIS SECTION; AND BEGIN CONSTRUCTION OF IN-RIVER IMPROVEMENTS AND BANK STABILIZATION MEASURES BETWEEN THE FORMER GRANVILLE TEMPORARY CROSSING AND THE TEMPORARY RIVER CROSSING NEAR BENJAMIN STREET. UTILIZE TEMPORARY COFFERDAMS AND CONSTRUCTION DEWATERING PUMPS (WITH CRUSHED STONE SUMPS) AS REQUIRED TO ISOLATE SECTIONS OF THE RIVER BETWEEN THE BENJAMIN TEMPORARY CROSSING AND FORMER GRANVILLE TEMPORARY CROSSING TO FACILITATE CONSTRUCTION OF IN-RIVER IMPROVEMENTS UNDER DRY WORKING CONDITIONS. AS SHOWN IN GRAPHIC, A TEMPORARY COFFERDAM COULD BE CONSTRUCTED DOWN THE APPROXIMATE CENTER OF THE RIVER CHANNEL SO THAT IMPROVEMENTS COULD BE CONSTRUCTED ON ONE SIDE OF RIVER WHILE FLOW IS BEING DIVERTED TO OTHER SIDE OF RIVER. THE CULVERTS AT THE UPSTREAM RIVER CROSSING WOULD BE CAPPED/BLOCKED ACCORDINGLY.
11. ONCE CONSTRUCTION OF THE IN-RIVER IMPROVEMENTS AND BANK STABILIZATION MEASURES ARE COMPLETE WITHIN THIS SECTION OF RIVER; REMOVE TEMPORARY RIVER CROSSING NEAR BENJAMIN STREET; FINISH GRADE, STABILIZE, AND RESTORE TEMPORARY HAUL ROAD AREA IN THIS SECTION; AND BEGIN CONSTRUCTION OF IN-RIVER IMPROVEMENTS AND BANK STABILIZATION MEASURES BETWEEN THE FORMER BENJAMIN TEMPORARY CROSSING AND THE FORMER SEDIMENT CONTAMINATION AREA. CONNECT IMPROVEMENTS INTO PREVIOUSLY CONSTRUCTED IMPROVEMENTS AS PART OF PHASE 1. UTILIZE TEMPORARY COFFERDAMS (LARGE SANDBAGS OR EQUAL) AND CONSTRUCTION DEWATERING PUMPS AS REQUIRED TO ISOLATE SECTIONS OF THE RIVER BETWEEN THE GRANVILLE TEMPORARY CROSSING AND THE NATURE-LIKE FISHWAY TO FACILITATE CONSTRUCTION OF IN-RIVER IMPROVEMENTS.
12. FINISH GRADE, STABILIZE, AND RESTORE TEMPORARY HAUL ROAD AREA UPSTREAM OF FORMER SEDIMENT CONTAMINATION AREA. REMOVE TEMPORARY RIVER CROSSING AT CASHMAN'S PARK AND RESTORE AREA.
13. PERFORM ANY REMAINING RESTORATION ACTIVITIES ALONG THE RIVER.
14. FINISH CONSTRUCTION OF RIVER OVERLOOK AREA, UPPER PORTION OF WALL, AND INSTALL STABILIZATION/RESTORATION MEASURES AT PARCEL 516-304-1. REMOVE TEMPORARY STONE CONSTRUCTION ACCESS AT THIS PARCEL AND RESTORE ANY DAMAGED PAVEMENT TO ORIGINAL CONDITIONS OR BETTER.
15. FINISH CONSTRUCTION OF ANY IN-RIVER OR OUT-OF-RIVER IMPROVEMENTS AT CASHMAN PARK. ONCE IMPROVEMENTS HAVE BEEN ACCEPTED BY ENGINEER AND/OR OWNER, RESTORE UPLAND AREAS DISTURBED BY CONSTRUCTION WITHIN CASHMAN PARK AND DEMOBILIZE.

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

LAYER STATE:
MS VIEW:

SCALE:
HORZ.: 1" = 140'
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0 70 140
GRAPHIC SCALE

CITY OF HAVERHILL

WATER CONTROL & CONSTRUCTION SEQUENCING PLAN NO. 2

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

CW-102

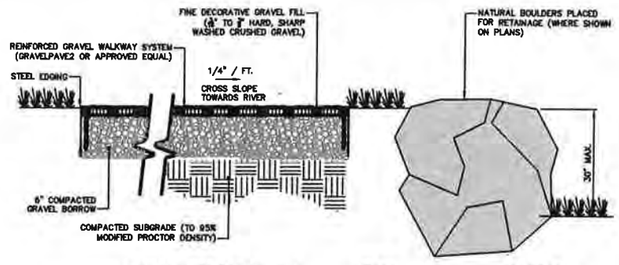

GRAVEL WALKWAY/ACCESS PATH (AT CASHMAN PARK)
NOT TO SCALE

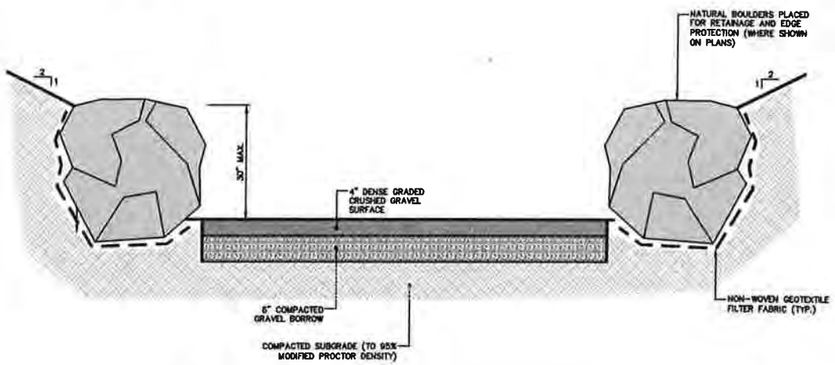

KAYAK/CANOE ACCESS PATH (AT CASHMAN PARK)
NOT TO SCALE

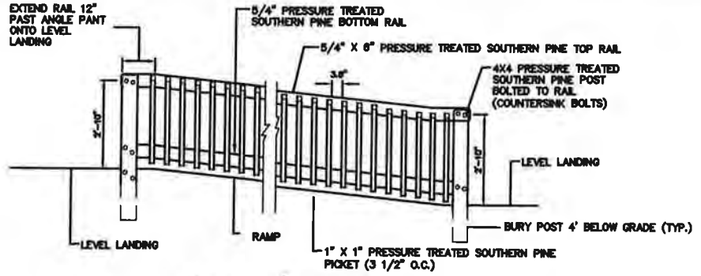

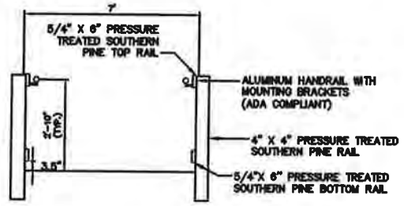

TIMBER HANDRAIL (AT KAYAK/CANOE ACCESS)
NOT TO SCALE

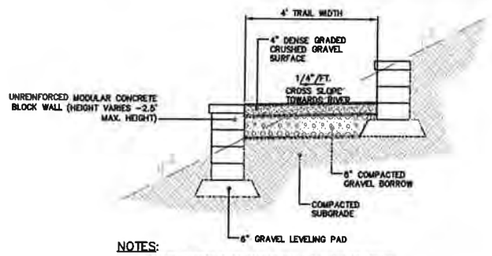

NOTES:
1. GRAVEL BORROW BASE COURSE SHALL CONSIST OF REUSED ON-SITE GRAVEL OR IMPORTED GRAVEL MEETING THE GRADATION REQUIREMENTS OF M.1.03 OF THE MASSDOT STANDARD SPECIFICATIONS.
2. DENSE GRADED CRUSHED GRAVEL SURFACE SHALL CONSIST OF GRAVEL SURFACE MATERIAL MEETING THE REQUIREMENTS OF M2.05.0 OF THE MASSDOT STANDARD SPECIFICATIONS.
3. ALIGNMENT OF TRAIL MAY VARY SLIGHTLY WITHIN LIMIT OF DISTURBANCE (AS FIELD DIRECTED BY ENGINEER) IN ORDER TO MINIMIZE TREE AND VEGETATION REMOVAL.

COMPACTED GRAVEL WALKING TRAIL
NOT TO SCALE

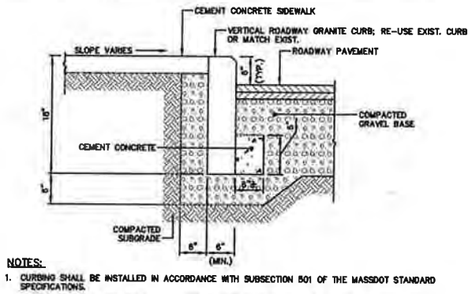

NOTES:
1. CURBING SHALL BE INSTALLED IN ACCORDANCE WITH SUBSECTION 501 OF THE MASSDOT STANDARD SPECIFICATIONS.
2. GRANITE CURB, GRANITE CURB INLETS, AND GRANITE CURB CORNERS SHALL BE IN ACCORDANCE WITH M9.04.1, M9.04.5, AND M9.04.6 OF THE MASSDOT STANDARD SPECIFICATIONS, RESPECTIVELY.
3. CEMENT CONCRETE (3,000 PSI, 3/4-INCH, 520) SHALL BE IN ACCORDANCE WITH M4.02.00 OF THE MASSDOT STANDARD SPECIFICATIONS AND INSTALLED IN ACCORDANCE WITH SUBSECTION 478 OF THE MASSDOT STANDARD SPECIFICATIONS.
4. MORTAR FOR CURBING JOINTS SHALL BE IN ACCORDANCE WITH M4.02.15 OF THE MASSDOT STANDARD SPECIFICATIONS.

VERTICAL ROADWAY GRANITE CURB
NOT TO SCALE



SHRUB PLANTING
NOT TO SCALE

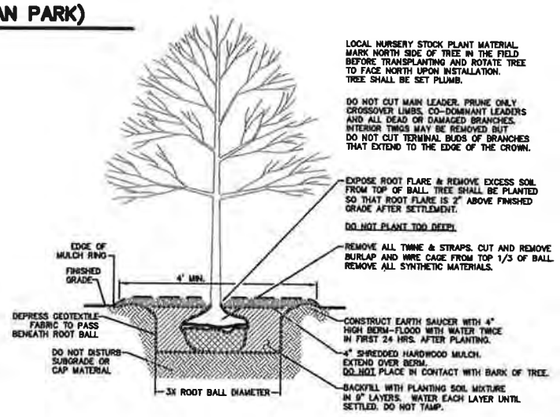

NOTES:
1. STAKES & GUYS SHALL NOT BE USED.
2. SPRAY WITH ANTIDESICCANT IN ACCORDANCE WITH MFG'S INSTRUCTIONS IF FOLIAGE IS PRESENT.

TREE PLANTING DETAIL
NOT TO SCALE

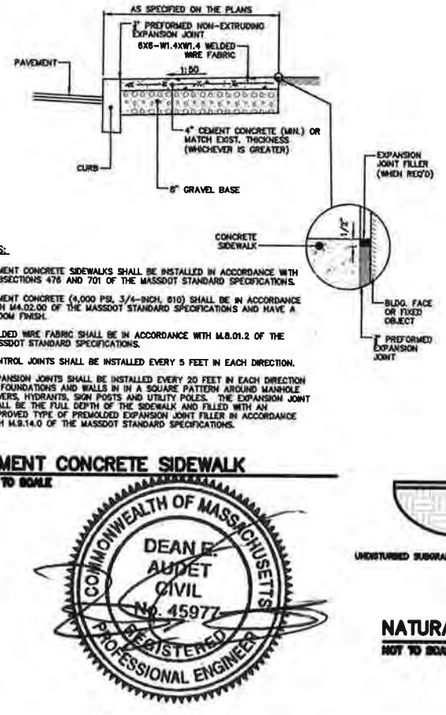

NOTES:
1. CEMENT CONCRETE SIDEWALKS SHALL BE INSTALLED IN ACCORDANCE WITH SUBSECTIONS 478 AND 701 OF THE MASSDOT STANDARD SPECIFICATIONS.
2. CEMENT CONCRETE (4,000 PSI, 3/4-INCH, 610) SHALL BE IN ACCORDANCE WITH M4.02.00 OF THE MASSDOT STANDARD SPECIFICATIONS AND HAVE A BROOM FINISH.
3. WELDED WIRE FABRIC SHALL BE IN ACCORDANCE WITH M.8.01.2 OF THE MASSDOT STANDARD SPECIFICATIONS.
4. CONTROL JOINTS SHALL BE INSTALLED EVERY 5 FEET IN EACH DIRECTION.
5. EXPANSION JOINTS SHALL BE INSTALLED EVERY 20 FEET IN EACH DIRECTION AT FOUNDATIONS AND WALLS IN IN A SQUARE PATTERN AROUND MANHOLE COVERS, HYDRANTS, SIGN POSTS AND UTILITY POLES. THE EXPANSION JOINT SHALL BE THE FULL DEPTH OF THE SIDEWALK AND FILLED WITH AN APPROVED TYPE OF PREMOLDED EXPANSION JOINT FILLER IN ACCORDANCE WITH M.9.14.0 OF THE MASSDOT STANDARD SPECIFICATIONS.

CEMENT CONCRETE SIDEWALK
NOT TO SCALE

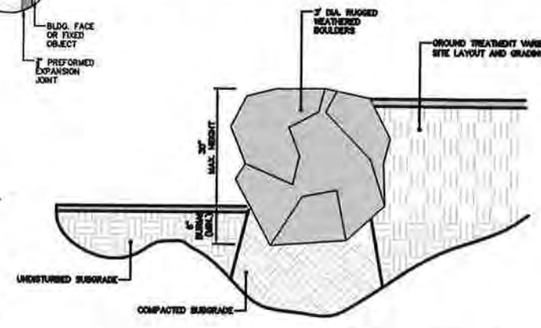

NATURAL BOULDER PLACEMENT (FOR RETAINAGE)
NOT TO SCALE

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ.: AS NOTED
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0
GRAPHIC SCALE

CITY OF HAVERHILL

CONSTRUCTION DETAILS

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

CD-501

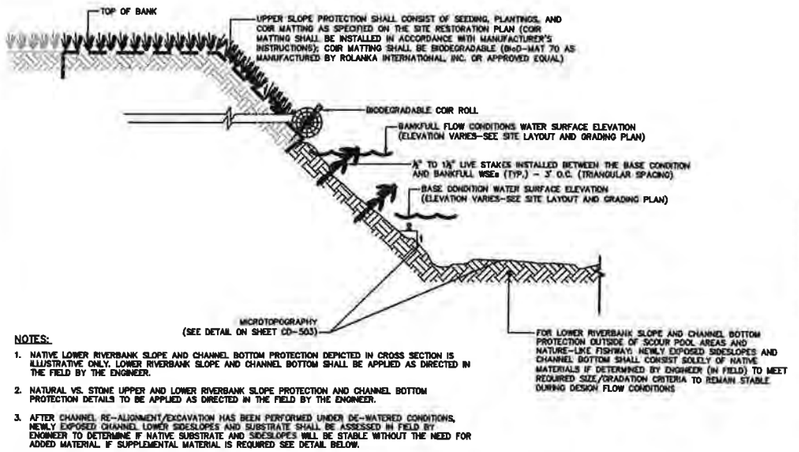

NOTES:

1. NATIVE LOWER RIVERBANK SLOPE AND CHANNEL BOTTOM PROTECTION DEPICTED IN CROSS SECTION IS ILLUSTRATIVE ONLY. LOWER RIVERBANK SLOPE AND CHANNEL BOTTOM SHALL BE APPLIED AS DIRECTED IN THE FIELD BY THE ENGINEER.
2. NATURAL VS. STONE UPPER AND LOWER RIVERBANK SLOPE PROTECTION AND CHANNEL BOTTOM PROTECTION DETAILS TO BE APPLIED AS DIRECTED IN THE FIELD BY THE ENGINEER.
3. AFTER CHANNEL RE-ALIGNMENT/EXCAVATION HAS BEEN PERFORMED UNDER DE-WATERED CONDITIONS, NEWLY EXPOSED CHANNEL LOWER SIDESLOPES AND SUBSTRATE SHALL BE ASSESSED IN FIELD BY ENGINEER TO DETERMINE IF NATIVE SUBSTRATE AND SIDESLOPES WILL BE STABLE WITHOUT THE NEED FOR ADDED MATERIAL. IF SUPPLEMENTAL MATERIAL IS REQUIRED SEE DETAIL BELOW.

NATURAL UPPER AND LOWER RIVERBANK SLOPE PROTECTION AND CHANNEL BOTTOM PROTECTION (OUTSIDE OF NATURE-LIKE FISHWAY, SCOUR HOLE, AND SCOUR COUNTERMEASURE LOCATIONS)

NOT TO SCALE

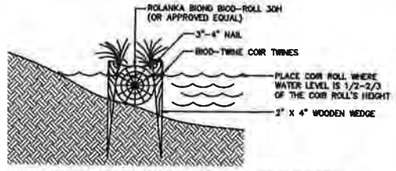

COIR ROLL PLACEMENT OPTION 1 -- WITHOUT BANK SUPPORT

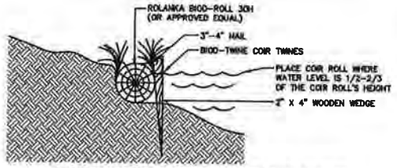

COIR ROLL PLACEMENT OPTION 2 -- WITH BANK SUPPORT

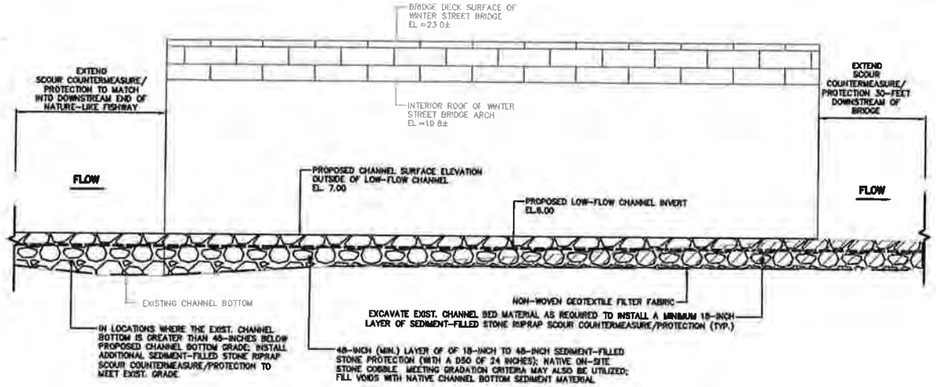

WINTER STREET BRIDGE SCOUR COUNTERMEASURE/PROTECTION

NOT TO SCALE

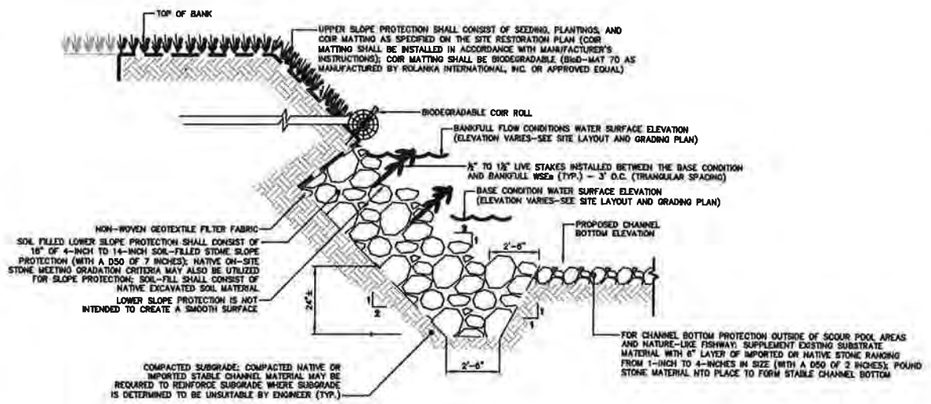

NOTE:

IMPORTED LOWER RIVERBANK SLOPE AND CHANNEL BOTTOM PROTECTION DEPICTED IN CROSS SECTION IS ILLUSTRATIVE ONLY. LOWER RIVERBANK SLOPE AND CHANNEL BOTTOM SHALL BE APPLIED AS DIRECTED IN THE FIELD BY THE ENGINEER.

STONE UPPER AND LOWER RIVERBANK SLOPE PROTECTION AND CHANNEL BOTTOM PROTECTION (OUTSIDE OF NATURE-LIKE FISHWAY, SCOUR HOLE, AND SCOUR COUNTERMEASURE LOCATIONS)

NOT TO SCALE

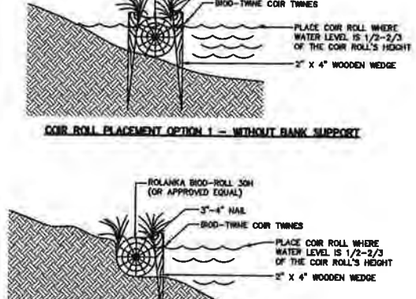

COIR ROLL PLACEMENT OPTION 1 -- WITHOUT BANK SUPPORT

COIR ROLL PLACEMENT OPTION 2 -- WITH BANK SUPPORT

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ.: AS NOTED
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0
GRAPHIC SCALE

CITY OF HAVERHILL

CONSTRUCTION DETAILS

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

CD-502

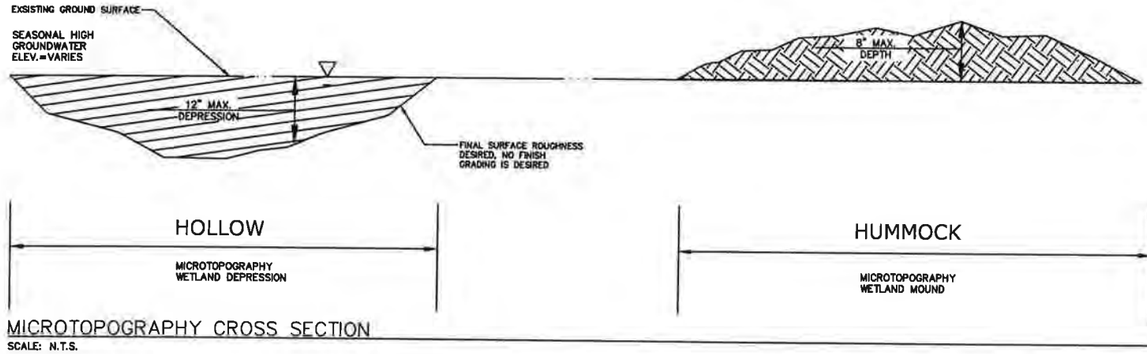

MICROTOPOGRAPHY CROSS SECTION

SCALE: N.T.S.

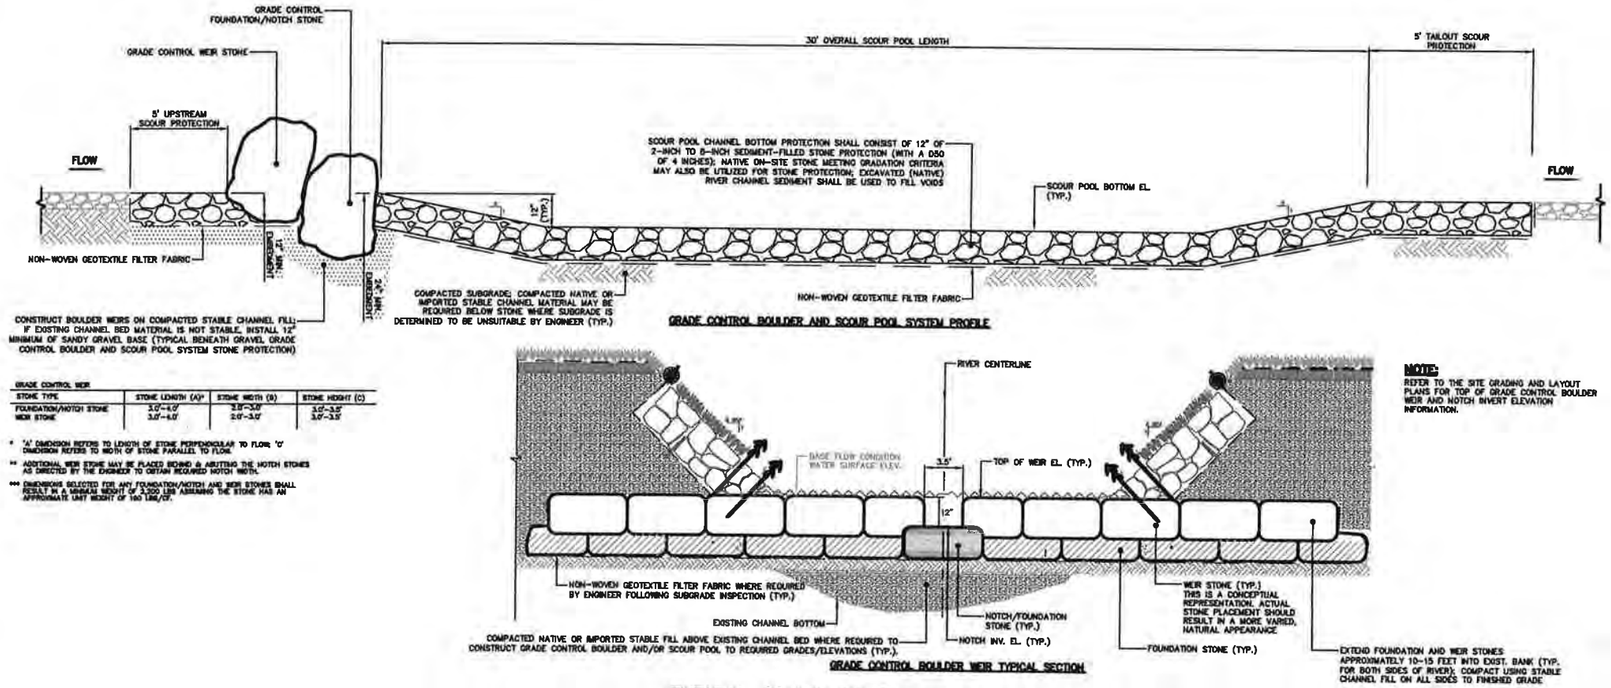

GRADE CONTROL BOULDER AND SCOUR POOL SYSTEM PROFILE

GRADE CONTROL WEIR			
STONE TYPE	STONE LENGTH (A)*	STONE WIDTH (B)	STONE HEIGHT (C)
FOUNDATION/NOTCH STONE	3.0'-4.0'	2.0'-3.0'	1.0'-2.5'
WEIR STONE	3.0'-6.0'	2.0'-3.0'	1.0'-2.5'

* "A" DIMENSION REFERS TO LENGTH OF STONE PERPENDICULAR TO FLOW; "C" DIMENSION REFERS TO WIDTH OF STONE PARALLEL TO FLOW.

** ADDITIONAL WEIR STONE MAY BE PLACED BEHIND & ABUTTING THE NOTCH STONES AS DIRECTED BY THE ENGINEER TO OBTAIN REQUIRED NOTCH WIDTH.

*** DIMENSIONS SELECTED FOR ANY FOUNDATION/NOTCH AND WEIR STONES SHALL RESULT IN A MINIMUM WEIGHT OF 3,200 LBS ASSUMING THE STONE HAS AN APPROXIMATE UNIT WEIGHT OF 160 LBS/CF.

GRADE CONTROL BOULDER WEIR TYPICAL SECTION

NOTE:
REFER TO THE SITE GRADING AND LAYOUT PLANS FOR TOP OF GRADE CONTROL BOULDER WEIR AND NOTCH INVERT ELEVATION INFORMATION.

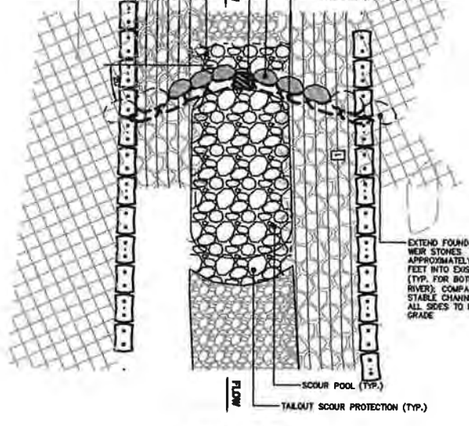

TYPICAL PLAN VIEW

TYPICAL GRADE CONTROL BOULDER AND SCOUR POOL SYSTEM

NOT TO SCALE

COMMONWEALTH OF MASSACHUSETTS
DEAN E. AUDET
CIVIL
No. 25977
REGISTERED PROFESSIONAL ENGINEER

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ.: AS NOTED
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0
GRAPHIC SCALE

CITY OF HAVERHILL

CONSTRUCTION DETAILS

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

CD-503

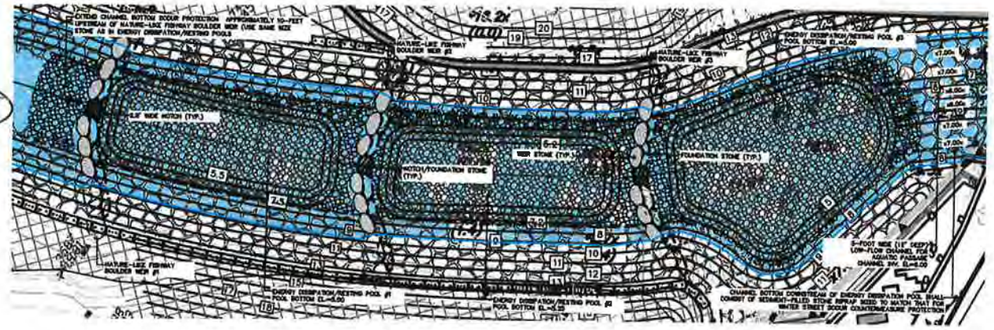

NATURE-LIKE FISHWAY LAYOUT

SCALE 1"=30'

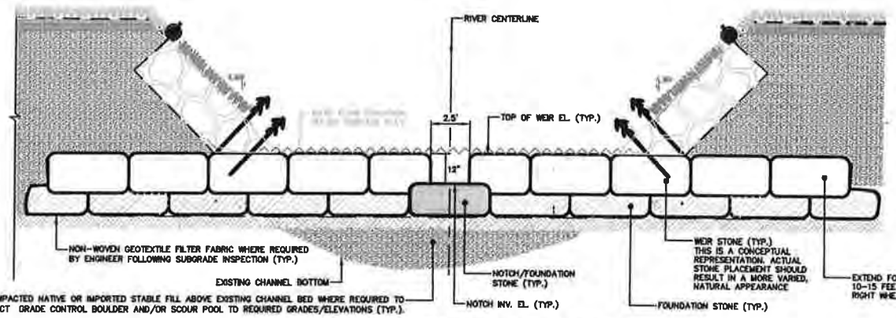

NATURE-LIKE FISHWAY BOULDER WEIR TYPICAL SECTION

NOTE:

REFER TO THE SITE GRADING AND LAYOUT PLANS FOR TOP OF NATURE-LIKE FISHWAY BOULDER WEIR AND NOTCH INVERT ELEVATION INFORMATION.

NATURE-LIKE FISHWAY BOULDER WEIR

STONE TYPE	STONE LENGTH (A)*	STONE WIDTH (B)	STONE HEIGHT (C)
FOUNDATION/NOTCH STONE	3.0'-4.0'	2.0'-3.0'	3.0'-3.5'
WEIR STONE	3.0'-4.0'	2.0'-3.0'	3.0'-3.5'

* 'A' DIMENSION REFERS TO LENGTH OF STONE PERPENDICULAR TO FLOW. 'B' DIMENSION REFERS TO WIDTH OF STONE PARALLEL TO FLOW.

** ADDITIONAL WEIR STONE MAY BE PLACED BEHIND & ABUTTING THE NOTCH STONES AS DIRECTED BY THE ENGINEER TO OBTAIN REQUIRED NOTCH WIDTH.

*** DIMENSIONS SELECTED FOR ANY FOUNDATION/NOTCH AND WEIR STONES SHALL RESULT IN A MINIMUM WEIGHT OF 2,400 LBS ASSUMING THE STONE HAS AN APPROXIMATE UNIT WEIGHT OF 150 LBS/CF.

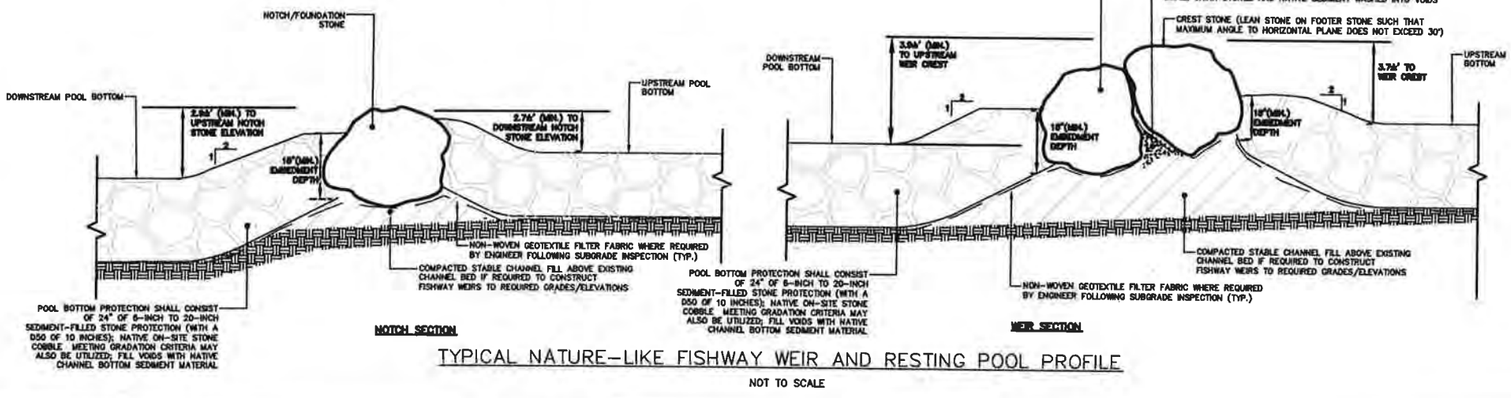

TYPICAL NATURE-LIKE FISHWAY WEIR AND RESTING POOL PROFILE

NOT TO SCALE

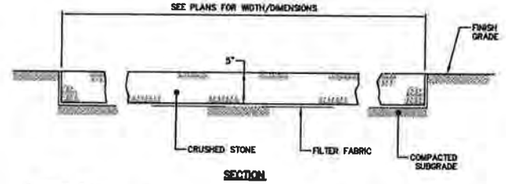

SECTION



PLAN

NOTES:

1. MAINTAIN ANTI-TRACKING APRON IN GOOD CONDITION THROUGHOUT CONSTRUCTION PERIOD.
2. ADJACENT ROADWAY SHALL BE SWEPT DAILY TO REMOVE ANY MATERIAL THAT MAY BE TRACKED ONTO PAVEMENT.
3. WIDTH OF APRON SHALL NOT BE LESS THAN WIDTH OF INGRESS OR EGRESS.
4. CRUSHED STONE SHALL CONFORM TO THE REQUIREMENTS OF STANDARD SPECIFICATIONS SECTION M2.01.1 (1 1/2 INCH).
5. FILTER FABRIC SHALL BE NON-WOVEN AND BE LISTED WITHIN MASSDOT'S APPROVED MATERIALS LIST FOR CLASS I AND 2 APPLICATIONS.

TEMPORARY STONE CONSTRUCTION ACCESS

NOT TO SCALE

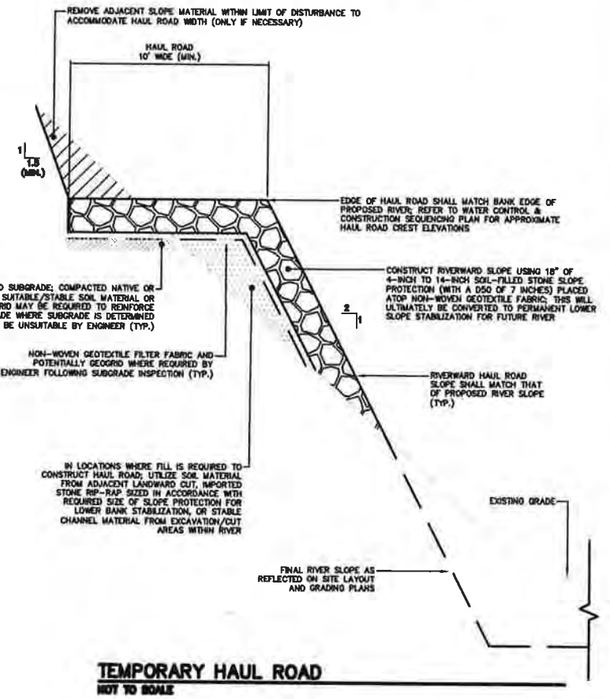

TEMPORARY HAUL ROAD

NOT TO SCALE

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ.: AS NOTED
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0
GRAPHIC SCALE

CITY OF HAVERHILL

CONSTRUCTION DETAILS

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

CD-504

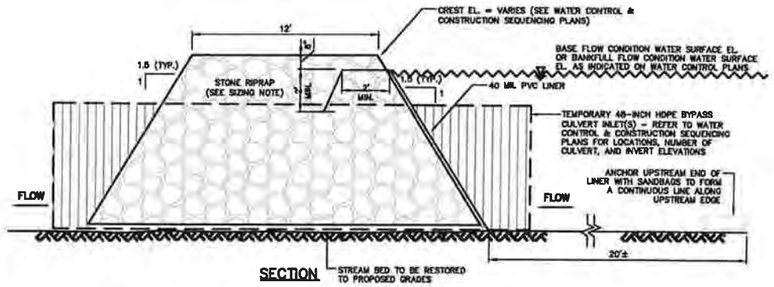

TEMPORARY RIVER CROSSING
NOT TO SCALE

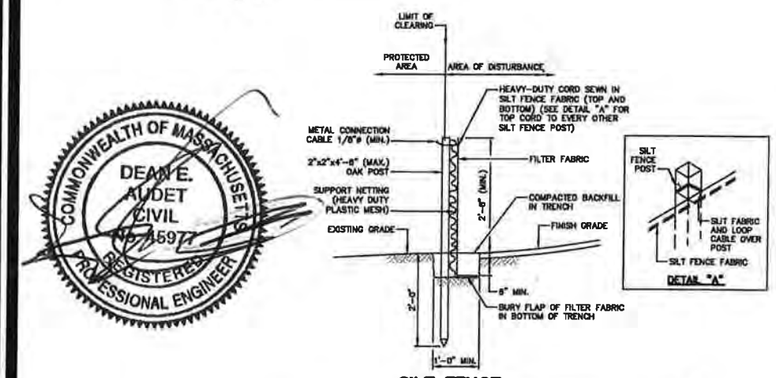

SILT FENCE
NOT TO SCALE

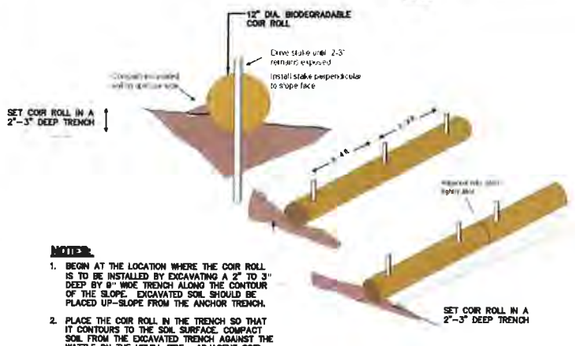

NOTES:

1. BEGIN AT THE LOCATION WHERE THE COIR ROLL IS TO BE INSTALLED BY EXCAVATING A 2" TO 3" DEEP BY 9" WIDE TRENCH ALONG THE CONTOUR OF THE SLOPE. EXCAVATED SOIL SHOULD BE PLACED UP-SLOPE FROM THE ANCHOR TRENCH.
2. PLACE THE COIR ROLL IN THE TRENCH SO THAT IT CONTOURS TO THE SOIL SURFACE. COMPACT SOIL FROM THE EXCAVATED TRENCH AGAINST THE WATTLE ON THE UPHILL SIDE. ADJACENT COIR ROLLS SHALL TIGHTLY ABUT.
3. SECURE THE COIR ROLL WITH 36" LONG (2"x2") STAKES SPACED EVERY 3' TO 4' ON CENTER AND WITH A STAKE ON EACH END. STAKES SHOULD BE DRIVEN THROUGH THE MIDDLE OF THE COIR ROLL LEAVING AT LEAST 2" TO 3" OF STAKE EXTENDING ABOVE THE COIR ROLL. STAKES SHALL BE DRIVEN PERPENDICULAR TO THE SLOPE FACE.

BIODEGRADABLE COIR ROLL (FOR PERIMETER EROSION CONTROL MEASURE)
NOT TO SCALE

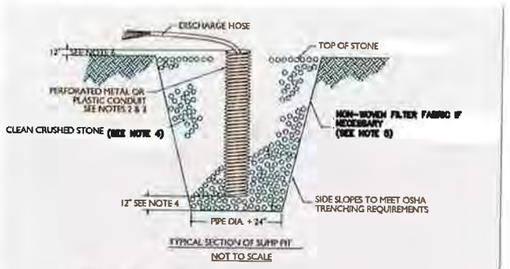

TYPICAL SECTION OF SUMP PIT
NOT TO SCALE

1. OVERALL SUMP PIT DIMENSIONS SHALL BE COMPATIBLE WITH ANTICIPATED SEEPAGE RATES AND PUMP SIZE TO BE USED.
2. THE STANDPIPE DIAMETER AND NUMBER OF PERFORATIONS SHALL BE COMPATIBLE WITH THE PUMP SIZE BEING USED.
3. PERFORATIONS IN THE STANDPIPE SHALL BE EITHER CIRCULAR OR SLOTS. PERFORATION SIZE SHALL NOT EXCEED 1/2" IN DIAMETER.
4. CRUSHED STONE SHALL CONFORM TO THE GRADATION LISTED FOR CRUSHED STONE IN SUBSECTION M1.01.4 OF THE MASSDOT STANDARD SPECIFICATIONS FOR 3/4-INCH CRUSHED STONE. CRUSHED STONE SHALL EXTEND A MINIMUM OF 12" BELOW THE BOTTOM OF THE STANDPIPE.
5. IF EXCESSIVE MOVEMENT OF FINE SOIL PARTICLES FROM THE SURROUNDING EXISTING SOILS IS ANTICIPATED, A PROPERLY DESIGNED GEOTEXTILE SHALL BE PLACED BETWEEN THE EXISTING SOILS AND THE CRUSHED STONE OR GRAVEL BACKFILL
6. THE STANDPIPE SHALL EXTEND A MINIMUM OF 12" ABOVE THE SURROUNDING GROUND
7. WHEN USED FOR WATER CONTROL DURING THE CONSTRUCTION OF THE LOWER SLOPE AND TOE PROTECTION ASSOCIATED WITH BIODEGRADEDED SLOPE STABILIZATION, TREE REVETMENT SYSTEM, AND THE OUTFALL HEADWALL AND ASSOCIATED CHANNEL, BOTTOM SCOUR PROTECTION, PUMP DISCHARGE MAY NEED TO BE DIVERTED THROUGH A DEWATERING BAG PRIOR TO BEING DIRECTED INTO THE BROOK IF IT IS DETERMINED BY THE ENGINEER THAT THE DISCHARGE IS TURBID OR CLOUDY.

CRUSHED STONE SUMP DETAIL (FOR CONSTRUCTION DEWATERING PUMPS)
NOT TO SCALE

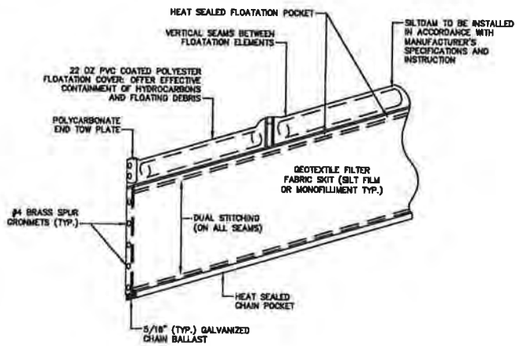

NOTES:

1. CURTAIN SHALL BE A TYPE III HEAVY DUTY CURTAIN THAT IS SUITABLE FOR INSTALLATION WITH FLOWS UP TO 5 FEET PER SECOND (FPS).
2. FLOATATION SIZE (6", 8" OR 12" DIA.) DETERMINED BY SKIRT DEPTH/SITE VARIABLES.
3. OTHER END TYPES AVAILABLE SUCH AS ALUMINUM UNIVERSAL SLIDE OR SLOTTED TUBE.
4. OPTIONAL TOP TENSION CABLE (3/16" TYP.) AVAILABLE FOR INCREASED STRENGTH.

TYPE III FLOATING TURBIDITY CURTAIN
NOT TO SCALE

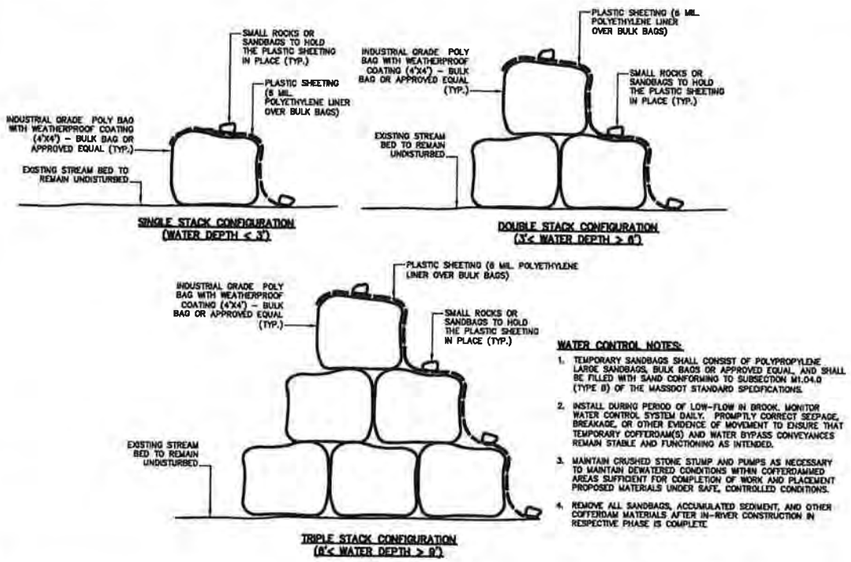

WATER CONTROL NOTES:

1. TEMPORARY SANDBAGS SHALL CONSIST OF POLYPROPYLENE LARGE SANDBAGS, BULK BAGS OR APPROVED EQUAL, AND SHALL BE FILLED WITH SAND CONFORMING TO SUBSECTION M1.04.0 (TYPE B) OF THE MASSDOT STANDARD SPECIFICATIONS.
2. INSTALL DURING PERIOD OF LOW-FLOW IN BROOK. MONITOR WATER CONTROL SYSTEM DAILY. PROMPTLY CORRECT SEEPAGE, BREAKAGE, OR OTHER EVIDENCE OF MOVEMENT TO ENSURE THAT TEMPORARY COFFERDAM(S) AND WATER BYPASS CONVEYANCES REMAIN STABLE AND FUNCTIONING AS INTENDED.
3. MAINTAIN CRUSHED STONE SUMP AND PUMPS AS NECESSARY TO MAINTAIN DEWATERED CONDITIONS WITHIN COFFERDAMMED AREAS SUFFICIENT FOR COMPLETION OF WORK AND PLACEMENT PROPOSED MATERIALS UNDER SAFE, CONTROLLED CONDITIONS.
4. REMOVE ALL SANDBAGS, ACCUMULATED SEDIMENT, AND OTHER COFFERDAM MATERIALS AFTER IN-RIVER CONSTRUCTION IN RESPECTIVE PHASE IS COMPLETE

TEMPORARY LARGE SANDBAG COFFERDAM (BULK BAGS OR APPROVED EQUAL)
NOT TO SCALE

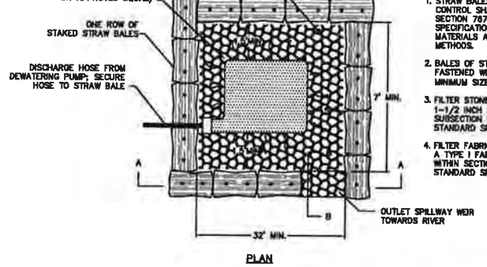

NOTES:

1. THE DEWATERING BAG, DIRTBAG® DB55 OR APPROVED EQUAL, SHALL BE HEAVY DUTY AND CONSIST OF A NONWOVEN BAG SEWN WITH A DOUBLE NEEDLE MATCHING USING A HIGH STRENGTH THREAD.
2. EACH DEWATERING BAG SHALL HAVE A FILL SPOUT LARGE ENOUGH TO ACCOMMODATE A 4-INCH DISCHARGE HOSE. THE BAG SHALL BE PROVIDED WITH STRAPS TO SECURE THE HOSE AND PREVENT PUMPED WATER FROM ESCAPING WITHOUT BEING FILTERED.
3. MAINTAIN DEWATERING BAG(S) AS NECESSARY TO EFFICIENTLY FILTER SEDIMENT OR PASS WATER AT A REASONABLE RATE. USE OF EXCESSIVE FLOW RATES OR OVERFILLING DIRTBAG® WITH SEDIMENT WILL CAUSE RUPTURES OF THE BAGS OR FAILURE OF THE HOSE ATTACHMENT STRAPS.
4. DISPOSE OF DEWATERING BAG AND CONTENTS AT OFF-SITE DISPOSAL FACILITY IN ACCORDANCE WITH THE APPROVED SOIL MANAGEMENT PLAN OR AS DIRECTED BY ENGINEER.
5. INSTALL DEWATERING BAG AND CRUSHED STONE BEDDING WITH A SLOPE SO INCOMING WATER FLOWS DOWNHILL THROUGH THE BAG WITHOUT CREATING MORE EROSION. STRAP THE NECK OF DEWATERING BAG TIGHTLY TO THE DISCHARGE HOSE.

NOTES:

1. STRAW BALES FOR EROSION CONTROL SHALL CONFORM TO SECTION 787 OF THE STANDARD SPECIFICATIONS INCLUDING MATERIALS AND CONSTRUCTION METHODS.
2. BALES OF STRAW SHALL BE FASTENED WITH WIRE AND HAVE A MINIMUM SIZE OF 1'x1.5'x3'.
3. FILTER STONE SHALL CONSIST OF 1-1/2 INCH STONE CONFORMING TO SUBSECTION M2.01.1 OF THE STANDARD SPECIFICATIONS.
4. FILTER FABRIC SHALL CONFORM TO A TYPE I FABRIC AS INCLUDED WITHIN SECTION M9.50.0 OF THE STANDARD SPECIFICATIONS.

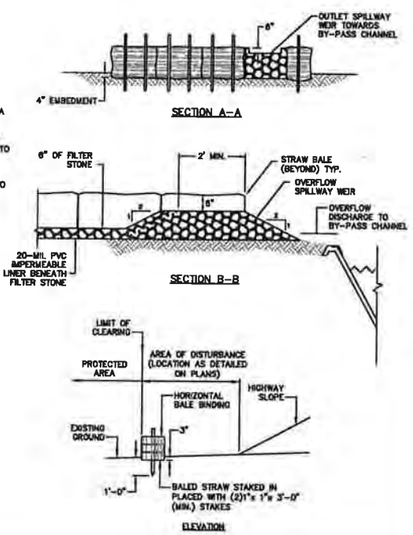

TEMPORARY DEWATERING BASIN WITH FILTER BAG
NOT TO SCALE

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ.: AS NOTED
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0
GRAPHIC SCALE

CITY OF HAVERHILL

CONSTRUCTION DETAILS

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170380.U30
DATE: JUNE 2022

CD-505

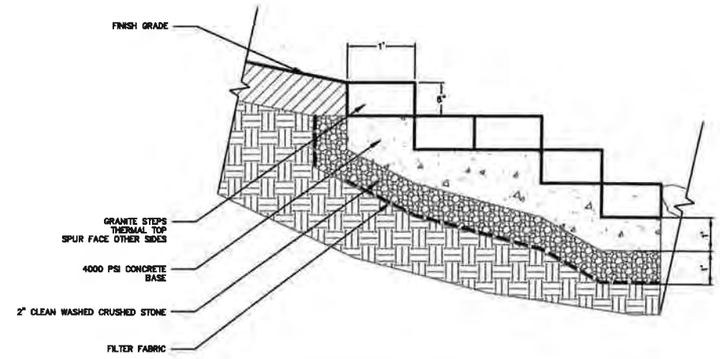

GRANITE STEPS
N.T.S.

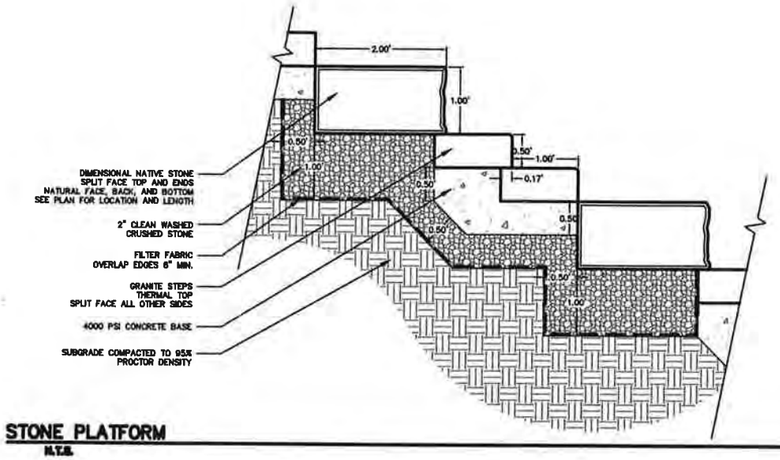

STONE PLATFORM
N.T.S.

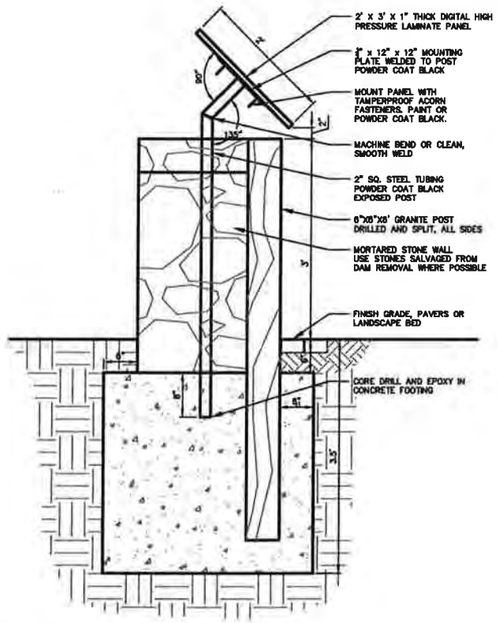

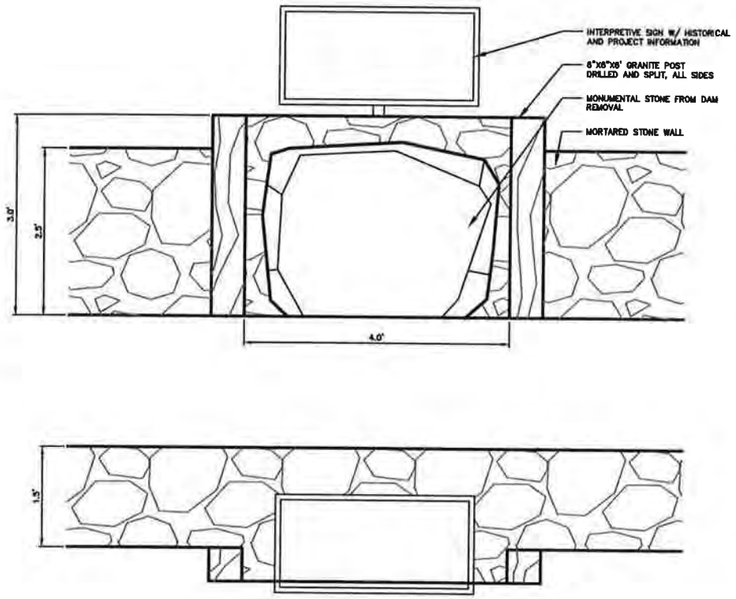

NOTES:
PROVIDE SHOP DRAWING BY SIGN MANUFACTURER FOR APPROVAL.

STONE WALL AND INTERPRETIVE SIGN
SCALE: NOT TO SCALE

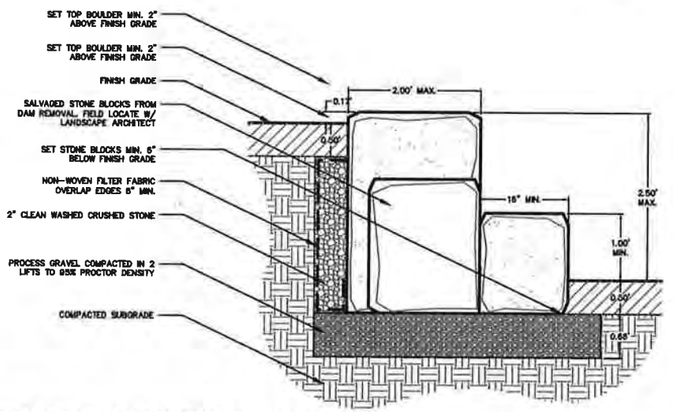

STACKED SALVAGED STONE BLOCKS
N.T.S.

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ.: AS NOTED
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0
GRAPHIC SCALE

CITY OF HAVERHILL

CONSTRUCTION DETAILS

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

CD-506

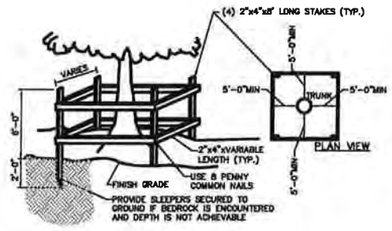

NOTES:
SEE LANDSCAPING PLAN FOR ADDITIONAL TREE PROTECTION NOTES.

TEMPORARY TREE PROTECTION
NOT TO SCALE

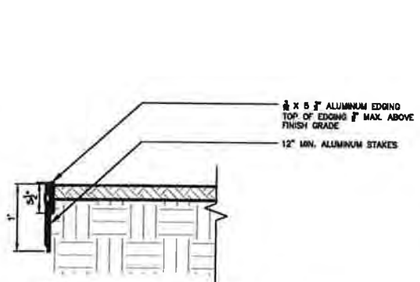

NOTES:
1. 16'-0" SECTIONS TO INCLUDE FIVE (5) 12" STAKES
2. 8'-0" SECTIONS TO INCLUDE THREE (3) 12" STAKES
3. COMPACT GRADES ADJACENT TO EDGING TO MINIMIZE SETTLING
4. CORNERS – CUT BASE OF EDGING HALF WAY AND FORM A CONTINUOUS CORNER.

LANDSCAPE EDGING
SCALE: NOT TO SCALE

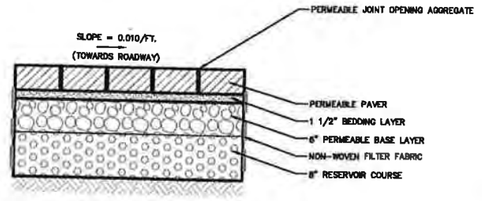

NOTES:
1. THICKNESS OF PERMEABLE CONCRETE PAVERS SHALL VARY BASED ON PRODUCT AND MANUFACTURER SELECTED.
2. THE MINIMUM THICKNESSES OF THE BEDDING LAYER, PERMEABLE BASE LAYER, AND RESERVOIR COURSE LAYER AS SPECIFIED ABOVE REPRESENT MINIMUM THICKNESSES AFTER COMPACTION.
3. PROTECT PERMEABLE PAVERS AND AGGREGATES FROM CONSTRUCTION VEHICLE TRAFFIC, RUNOFF FROM ADJACENT AREAS, AND SEDIMENTATION.

PERMEABLE PAVER SYSTEM
Scale: N.T.S.

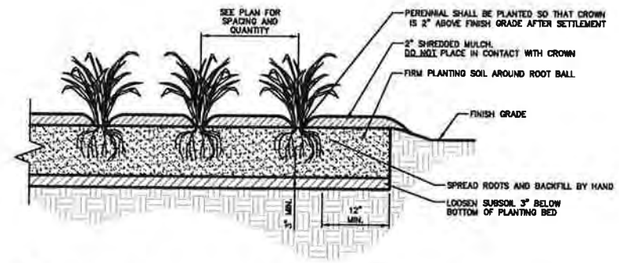

NOTES:
- SPADED PLANTING SOIL MIX SHALL BE PLACED 3" BELOW ROOT BALL AND BE MIXED WITH FERTILIZER. DO NOT COMPACT AFTER PLANTING.
- WATER THOROUGHLY AFTER PLANTING.
- PROVIDE WELL DRAINING SUBSOIL WHEN SOIL IS HEAVY OR COMPACTED.
- FOR CONTAINER GROWN PLANTS, USE FINGERS OR SMALL HAND TOOLS TO PULL THE ROOTS OUT OF THE OUTER LAYER OF POTTING SOIL; THEN CUT OR PULL APART ANY ROOTS CIRCLING THE PERIMETER OF THE CONTAINER.

PERENNIAL PLANT BED
Scale: N.T.S.

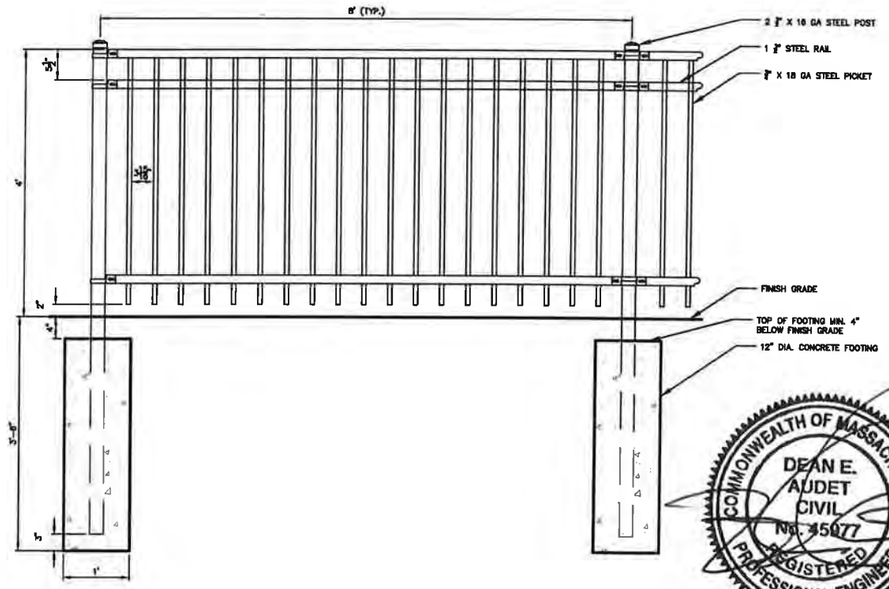

DECORATIVE FENCE
SCALE: NOT TO SCALE

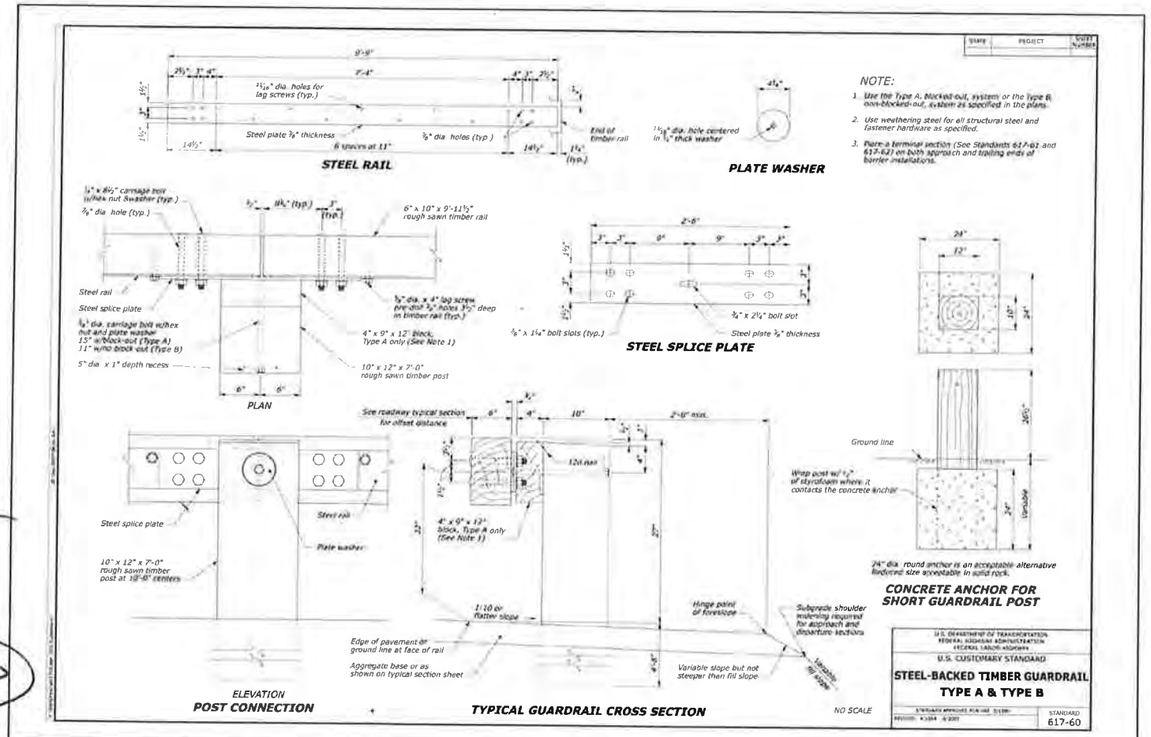

STEEL BACKED TIMBER GUARDRAIL
NOT TO SCALE

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ.: AS NOTED
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0
GRAPHIC SCALE

CITY OF HAVERHILL

CONSTRUCTION DETAILS

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

CD-507

File: J:\DWG\P2017\0390\U30\Civil\Plan\20170390U30_DET01.dwg Layout: 11X17-CD-507 Plotted: 2022-12-08 3:23 PM Saved: 2022-12-08 2:44 PM User: CNauman
MS VIEW: LAYER STATE: PC3: AUTOCAD PDF (GENERAL DOCUMENTATION).PC3 STB\CTB: FO HALF.STB

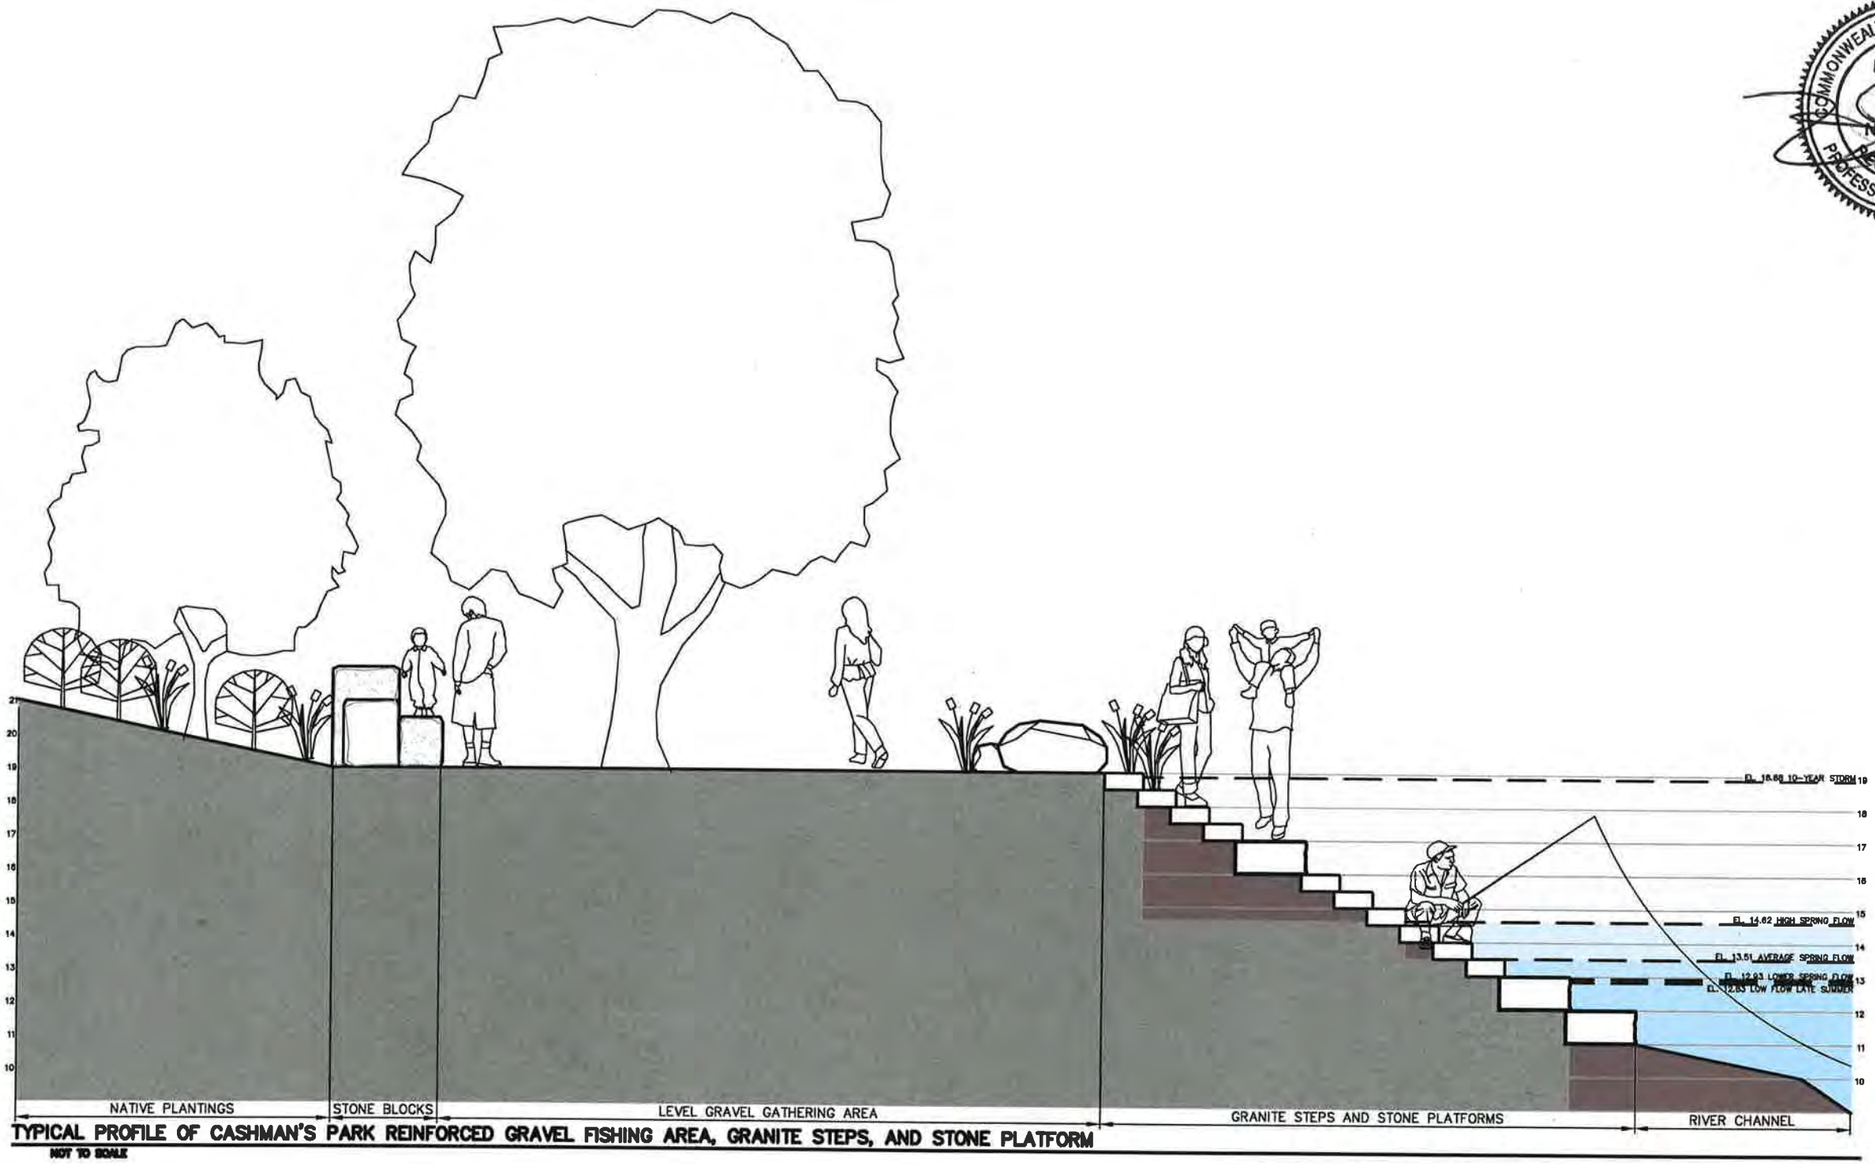

TYPICAL PROFILE OF CASHMAN'S PARK REINFORCED GRAVEL FISHING AREA, GRANITE STEPS, AND STONE PLATFORM

NOT TO SCALE

COMMONWEALTH OF MASSACHUSETTS
DEAN E. AUDET
CIVIL
No. 45977
REGISTERED PROFESSIONAL ENGINEER

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ.: AS NOTED
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0
GRAPHIC SCALE

CITY OF HAVERHILL

CONSTRUCTION DETAILS

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

CD-508

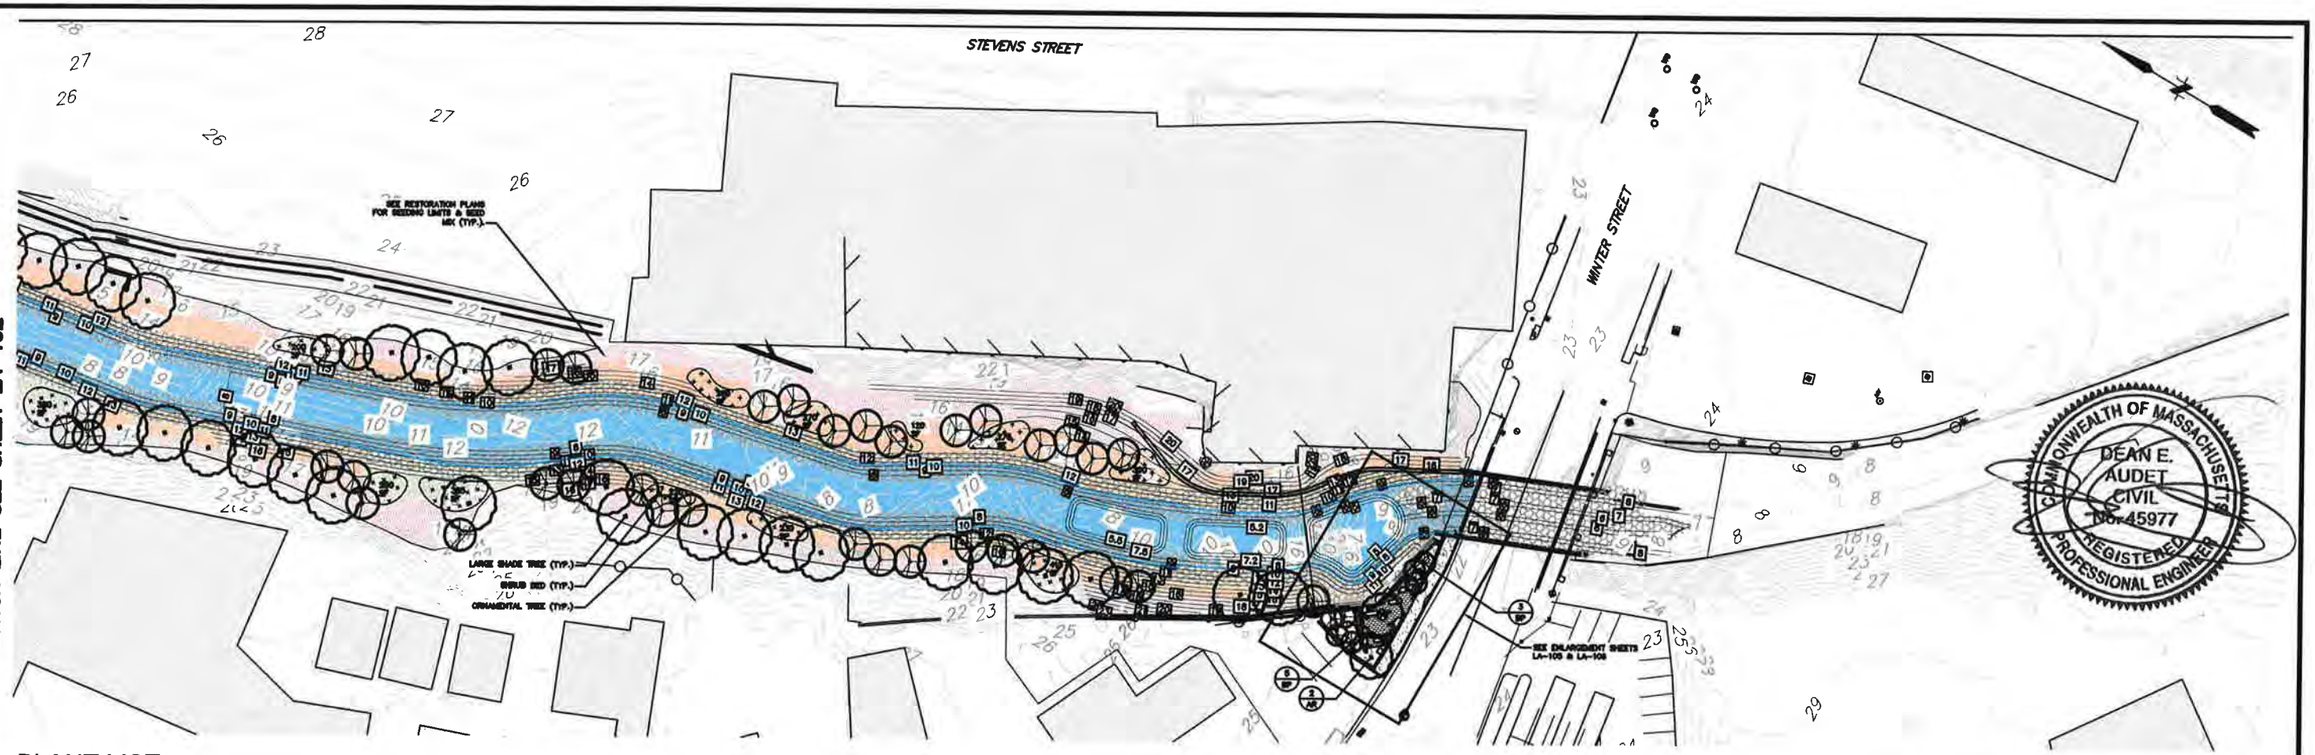

PLANT LIST

KEY	BOTANICAL NAME	COMMON NAME	SIZE
	LARGE SHADE TREES		
AB	ABIES BALSAMEA	BALSAM FIR	6–7' HT.
AR	ACER RUBRUM	RED MAPLE	2"–2 ½" CAL.
AS	ACER SACCHARINUM	SILVER MAPLE	2"–2 ½" CAL.
BA	BETULA ALLEGHANIENSIS	YELLOW BIRCH	2"–2 ½" CAL.
LL	LARIX LARCINA	AMERICAN LARCH	6–7' HT.
PO	PLATANUS OCCIDENTALIS	AMERICAN SYCAMORE	2"–2 ½" CAL.
PS	PRUNUS SEROTINA	BLACK CHERRY	2"–2 ½" CAL.
UA	ULMUS AMERICANA	AMERICAN ELM	2"–2 ½" CAL.
	ORNAMENTAL TREES		
AL	AMELANCHIER LAEVIS	ALLEGHENY SERVICEBERRY	6–8' HT.
BP	BETULA POPULIFOLIA	GREY BIRCH	1"–1 ½" CAL.
CA	CORNUS ALTERNIFOLIA	PAGODA DOGWOOD	1"–1 ½" CAL.
CC	CARPINUS CAROLINIANA	AMERICAN HORNBEAM	1"–1 ½" CAL.

KEY			
	SHRUBS		
AA	ARONIA ARBUTIFOLIA	RED CHOKEBERRY	3 GAL.
AI	ALNUS INCANA	SPECKLED ALDER	3 GAL.
AM	ARONIA MELANOCARPA	BLACK CHOKEBERRY	3 GAL.
CP	CLETHRA ALNIFOLIA	SWEET PEPPERBUSH	3 GAL.
CR	CORNUS RACEMOSA	GRAY DOGWOOD	3 GAL.
HV	HAMAMELIS VIRGINIANA	WITCH HAZEL	3 GAL.
IV	ILEX VERTICILLATA	WINTERBERRY HOLLY	3 GAL.
KA	KALMIA ANGUSTIFOLIA	SHEEP LAUREL	3 GAL.
SL	SPIRAEA LATIFOLIA	MEADOWSWEET	3 GAL.
ST	SPIRAEA TOMENTOSA	STEEPLEBUSH	3 GAL.
VL	VIBURNUM LENTAGO	NANNYBERRY	3 GAL.

LEGEND:

LARGE SHADE TREE
TOTAL QTY: 222

UNLESS OTHERWISE NOTED ON LANDSCAPE PLAN, SELECT AT LEAST 2 OF THE FOLLOWING SPECIES IN EQUAL QUANTITIES
–AMERICAN SYCAMORE (PLATANUS OCCIDENTALIS, FACW)
–AMERICAN ELM (ULMUS AMERICANA, FACW)
–AMERICAN LARCH (LARIX LARCINA, FACW)
–BLACK CHERRY (PRUNUS SEROTINA, FACU)
–SILVER MAPLE (ACER SACCHARINUM, FACW)

UNLESS OTHERWISE NOTED ON LANDSCAPE PLAN, SELECT AT LEAST 2 OF THE FOLLOWING SPECIES IN EQUAL QUANTITIES
–RED MAPLE (ACER RUBRUM, FAC)
–YELLOW BIRCH (BETULA ALLEGHANIENSIS, FAC)
–BALSAM FIR (ABIES BALSAMEA, FAC)

ORNAMENTAL TREE
TOTAL QTY: 258

UNLESS OTHERWISE NOTED ON LANDSCAPE PLAN, SELECT AT LEAST 3 OF THE FOLLOWING SPECIES IN EQUAL QUANTITIES
–GRAY BIRCH (BETULA POPULIFOLIA, FAC)
–AMERICAN HORNBEAM (CARPINUS CAROLINIANA, FAC)
–ALTERNATE LEAF DOGWOOD (CORNUS ALTERNIFOLIA, FACU)
–SHADBUSH (AMELANCHIER LAEVIS, NI)

SHRUBS
TOTAL AREA: 30,000 SF

SELECT AT LEAST 2 OF THE FOLLOWING SPECIES IN EQUAL QUANTITIES, PLANTED AT 6' O.C.
–MEADOWSWEET (SPIRAEA LATIFOLIA, FACW)
–STEEPLEBUSH (SPIRAEA TOMENTOSA, FACW)
–SPECKLED ALDER (ALNUS INCANA, FACW)
–RED CHOKEBERRY (ARONIA ARBUTIFOLIA, FACW)
–WINTERBERRY HOLLY (ILEX VERTICILLATA, FACW)

SELECT AT LEAST 2 OF THE FOLLOWING SPECIES IN EQUAL QUANTITIES, PLANTED AT 6' O.C.
–BLACK CHOKEBERRY (ARONIA MELANOCARPA, FAC)
–SWEET PEPPERBUSH (CLETHRA ALNIFOLIA, FAC)
–GRAY DOGWOOD (CORNUS RACEMOSA, FAC)
–NANNYBERRY (VIBURNUM LENTAGO, FAC)
–SHEEP LAUREL (KALMIA ANGUSTIFOLIA, FAC)
–WITCH HAZEL (HAMAMELIS VIRGINIANA, FACU)

EXISTING TREE TO REMAIN

PLANTING NOTES:

1. ALL PLANTING MATERIAL TO BE NURSERY GROWN STOCK SUBJECT TO A.A.N. STANDARDS
2. THE CONTRACTOR SHALL SUPPLY ALL PLANTS IN QUANTITIES SUFFICIENT TO COMPLETE THE WORK SHOWN ON THE DRAWINGS AND LISTED IN THE PLANT LIST. IN THE EVENT OF A DISCREPANCY BETWEEN QUANTITIES SHOWN IN THE PLANT LIST AND THOSE REQUIRED BY THE DRAWINGS, THE LARGER NUMBER SHALL APPLY.
3. PRECISE LOCATION OF ITEMS NOT DIMENSIONED ON THE PLAN ARE TO BE FIELD STAKED BY THE CONTRACTOR AND SHALL BE SUBJECT TO THE REQUIREMENTS SPECIFIED IN THE PREVIOUS NOTE.
4. ALL SHRUB MASSINGS AND TREE PITS SHALL BE MULCHED TO A DEPTH OF 3" WITH SHREDDED PINE BARK MULCH.
5. TREES SHALL NOT BE STAKED UNLESS OTHERWISE NOTED.
6. THE CONTRACTOR IS RESPONSIBLE FOR ANY DAMAGED VEGETATION AND SHALL REPLACE OR REPAIR ANY DAMAGED MATERIAL, AT HIS OWN EXPENSE. THE CONTRACTOR SHALL CONTACT "CALL BEFORE YOU DIG" AT 1-800-922-4455 PRIOR TO CONSTRUCTION.
7. ALL SHRUB AND GROUNDCOVER PLANTING AREAS SHALL HAVE CONTINUOUS BEDS OF TOPSOIL 12" DEEP. ALL SOD AND HYDROSEED AREAS SHALL HAVE A MINIMUM TOPSOIL BED OF 6".
8. THE CONTRACTOR IS RESPONSIBLE FOR LOCATING ALL UTILITIES IN THE FIELD. WHERE PLANT MATERIAL MAY INTERFERE WITH UTILITIES, THE CONTRACTOR SHALL NOTIFY THE LANDSCAPE ARCHITECT TO COORDINATE THEIR INSTALLATION.
9. FOR PLANTING SOIL MIX, SEE SPECIFICATIONS OR PLANTING DETAILS.
10. ALL EXISTING RILL, GULLY OR CHANNEL EROSION SHALL BE FILLED WITH APPROPRIATE BACKFILL MATERIAL, FINE RAKED, SCARIFIED AND STABILIZED WITH APPROPRIATE VEGETATIVE MATERIAL AND / OR APPROPRIATE SEDIMENTATION AND EROSION CONTROL MEASURES.
11. ADJUSTMENTS IN THE LOCATION OF THE PROPOSED PLANT MATERIAL AS A RESULT OF EXISTING VEGETATION TO REMAIN SHALL BE APPROVED BY THE LANDSCAPE ARCHITECT PRIOR TO INSTALLATION.
12. THE CONTRACTOR IS RESPONSIBLE FOR ALL MAINTENANCE REPAIR AND REPLACEMENT OF PLANT MATERIAL, AS REQUIRED, FOR THE DURATION OF THE PROJECT AND SUBSEQUENT WARRANTY PERIOD.
13. PLANTINGS INSTALLED IN THE DRY SUMMER MONTHS AND / OR LAWN SEEDED OUT OF SPRING OR FALL PERIODS, IF ALLOWED BY OWNER, WILL REQUIRE AGGRESSIVE IRRIGATION PROGRAMS AT THE CONTRACTOR'S EXPENSE, UNLESS OTHERWISE DIRECTED BY THE OWNER.
14. UPON COMPLETION OF PLANTING, REMOVE FROM SITE ALL EXCESS SOIL, MULCH, AND MATERIALS AND DEBRIS RESULTING FROM WORK OPERATIONS. CLEAN UP SHOULD BE COMPLETED AT THE END OF EACH WORKING DAY. RESTORE TO ORIGINAL CONDITIONS ALL DAMAGED PAVEMENTS, PLANTING AREAS, STRUCTURES AND LAWN AREAS RESULTING FROM LANDSCAPING OPERATIONS.
15. CONTRACTOR SHALL SURVEY, LOCATE, AND PROTECT ALL TREES WITHIN AREAS SHOWN AS "EXISTING VEGETATION TO REMAIN" WITHIN THE DEVELOPMENT ENVELOPE FOR REVIEW BY L.A. PRIOR TO CLEARING OPERATIONS.
16. CONTRACTOR TO RESEED ALL DISTURBED AREAS.

UTILITY NOTE

THE CONTRACTOR SHALL BE RESPONSIBLE FOR NOTIFYING "DIG SAFE" AT 811 OR 888-344-7233 TO ARRANGE FOR MARKING OUT EXISTING UNDERGROUND UTILITIES AT LEAST TWO WORKING DAYS PRIOR TO EXCAVATION.

THE UNDERGROUND UTILITIES DEPICTED HEREON ARE BASED ON FIELD LOCATION OF VISIBLE FEATURES, MAPS AND PLANS OF RECORD, UTILITY MAPPING OR OTHER SOURCES OF INFORMATION. THE ENGINEER MAKES NO GUARANTEE THAT THE UNDERGROUND UTILITIES SHOWN COMPRISE ALL SUCH UTILITIES IN THE AREA, EITHER IN SERVICE OR ABANDONED. THE ENGINEER FURTHER DOES NOT WARRANT THAT THE UNDERGROUND UTILITIES SHOWN ARE IN THE EXACT LOCATION INDICATED ALTHOUGH THE ENGINEER DOES DECLARE THAT THEY ARE DEPICTED AS ACCURATELY AS POSSIBLE FROM INFORMATION AVAILABLE. THE ENGINEER HAS NOT PHYSICALLY LOCATED THE UNDERGROUND UTILITIES.

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ.: 1" = 70'
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0 35 70
GRAPHIC SCALE

CITY OF HAVERHILL

LANDSCAPE AND PLANTING PLAN NO. 1

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

LA-101

COMMONWEALTH OF MASSACHUSETTS
DEAN E. AUDET
CIVIL
No. 45977
REGISTERED PROFESSIONAL ENGINEER

SEE RESTORATION PLANS FOR SEEDING LIMITS & SEED MIX (TYP.)

LARGE SHADE TREE (TYP.)
ORNAMENTAL TREE (TYP.)
SHRUB BED (TYP.)

MBTA RAILROAD

STEVENS STREET

LITTLE RIVER STREET

APPLE STREET

BENJAMIN STREET

CLIFF STREET

MATCH LINE SEE SHEET LA-103

MATCH LINE SEE SHEET LA-101

File: J:\DWG\P20170390\U30\Civil\Plan\20170390U30_LND01.dwg Layout: 11X17-LA-102 Plotted: 2022-12-08 3:24 PM Saved: 2022-12-08 2:50 PM User: CNauman
PC3: AUTOCAD PDF (GENERAL DOCUMENTATION).PC3 STB\CTB. FO HALF.STB
LAYER STATE:
MS VIEW:

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ.: 1" = 70'
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0 35 70
GRAPHIC SCALE

CITY OF HAVERHILL

LANDSCAPE AND PLANTING PLAN NO. 2

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

LA-102

COMMONWEALTH OF MASSACHUSETTS
DEAN E. AUDET
CIVIL
No. 45977
REGISTERED PROFESSIONAL ENGINEER

MBTA RAILROAD

MBTA RAILROAD

SEE RESTORATION PLANS FOR SEEDING LIMITS & SEED MIX (TYP.).

SEE ENLARGEMENT SHEETS LA-105 & LA-106

SKATE PARK

CASHMAN'S FIELD

EXISTING TREE TO REMAIN AND BE PROTECTED DURING CONSTRUCTION (TYP.)

CASHMAN'S FIELD

LEBLANC STREET

LARGE SHADE TREE (TYP.)

ORNAMENTAL TREE (TYP.)

SHRUB BED (TYP.)

MATCH LINE SEE SHEET LA-104

MATCH LINE SEE SHEET LA-102

File: J:\DWG\P20170390\U30\Civil\Plan\20170390U30_LND01.dwg Layout: 11X17-LA-103 Plotted: 2022-12-08 3:24 PM Saved: 2022-12-08 2:59 PM User: CNauman
PC3: AUTOCAD PDF (GENERAL DOCUMENTATION).PC3 STB\CTB: FO HALF.STB
LAYER STATE:
MS VIEW:

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ.: 1" = 70'
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0 35 70
GRAPHIC SCALE

CITY OF HAVERHILL

LANDSCAPE AND PLANTING PLAN NO. 3

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

LA-103

COMMONWEALTH OF MASSACHUSETTS
DEAN E. AUDET
CIVIL
No. 45877
REGISTERED
PROFESSIONAL ENGINEER

MBTA RAILROAD

SEE RESTORATION PLANS FOR SEEDING LIMITS & SEED MIX (TYP.).

ORNAMENTAL TREE (TYP.)

LARGE SHADE TREE (TYP.)

SHRUB PLANTING BED (TYP.)

WHITTIER PLACE

MATCH LINE SEE SHEET LA-103

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ.: 1" = 70'
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0 35 70
GRAPHIC SCALE

CITY OF HAVERHILL

LANDSCAPE AND PLANTING PLAN NO. 4

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

LA-104

File: J:\DWG\P2017\03\90\U30\Civil\Plan\20170390U30_LND01.dwg Layout: 11X17-LA-104 Plotted: 2022-12-08 3:24 PM Saved: 2022-12-08 2:50 PM User: CNauman
MS VIEW: LAYER STATE: PC3: AUTOCAD PDF (GENERAL DOCUMENTATION).PC3 STB/CTB: FD HALF.STB

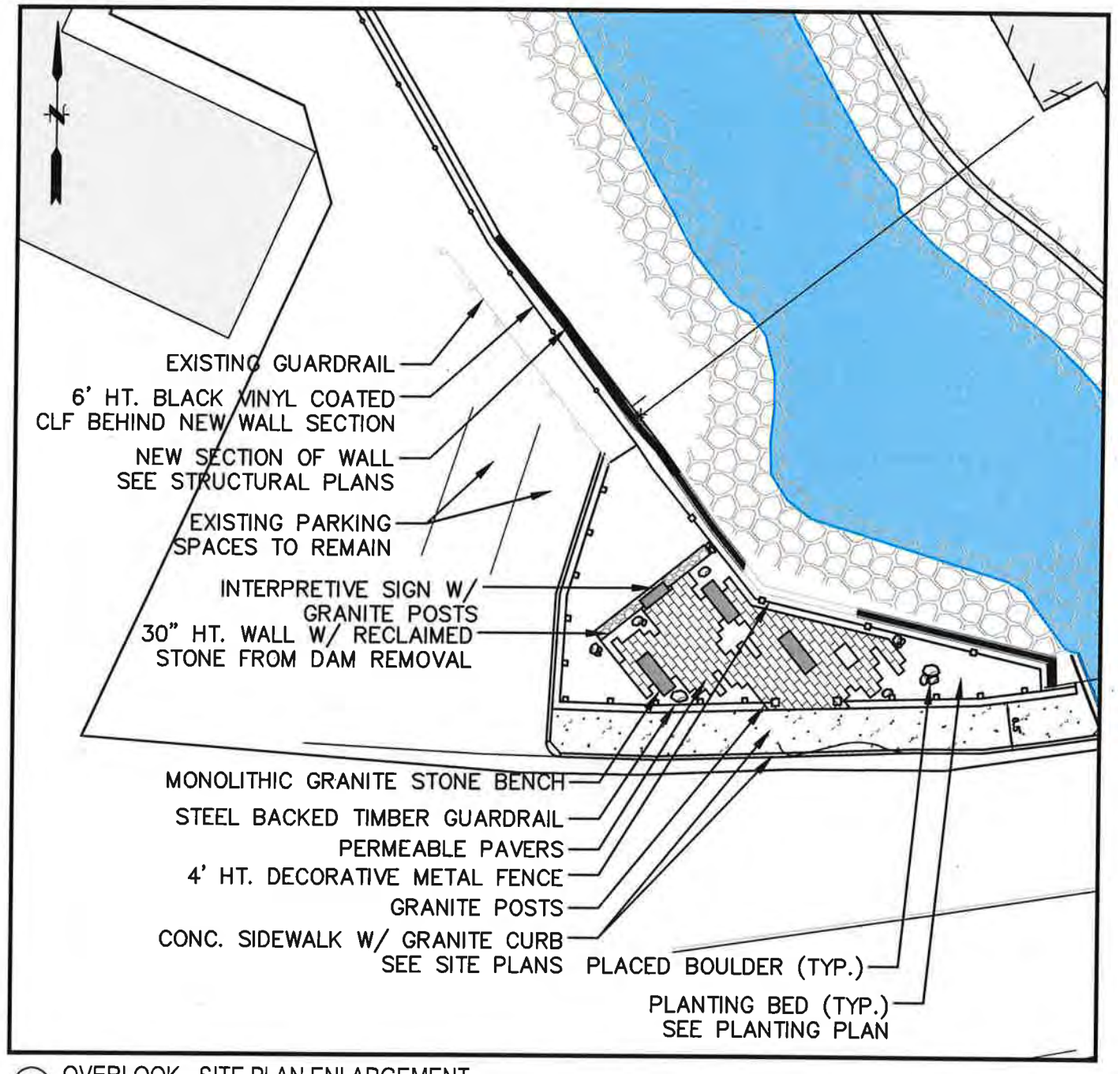

1 OVERLOOK - SITE PLAN ENLARGEMENT
SCALE: 1" = 20'

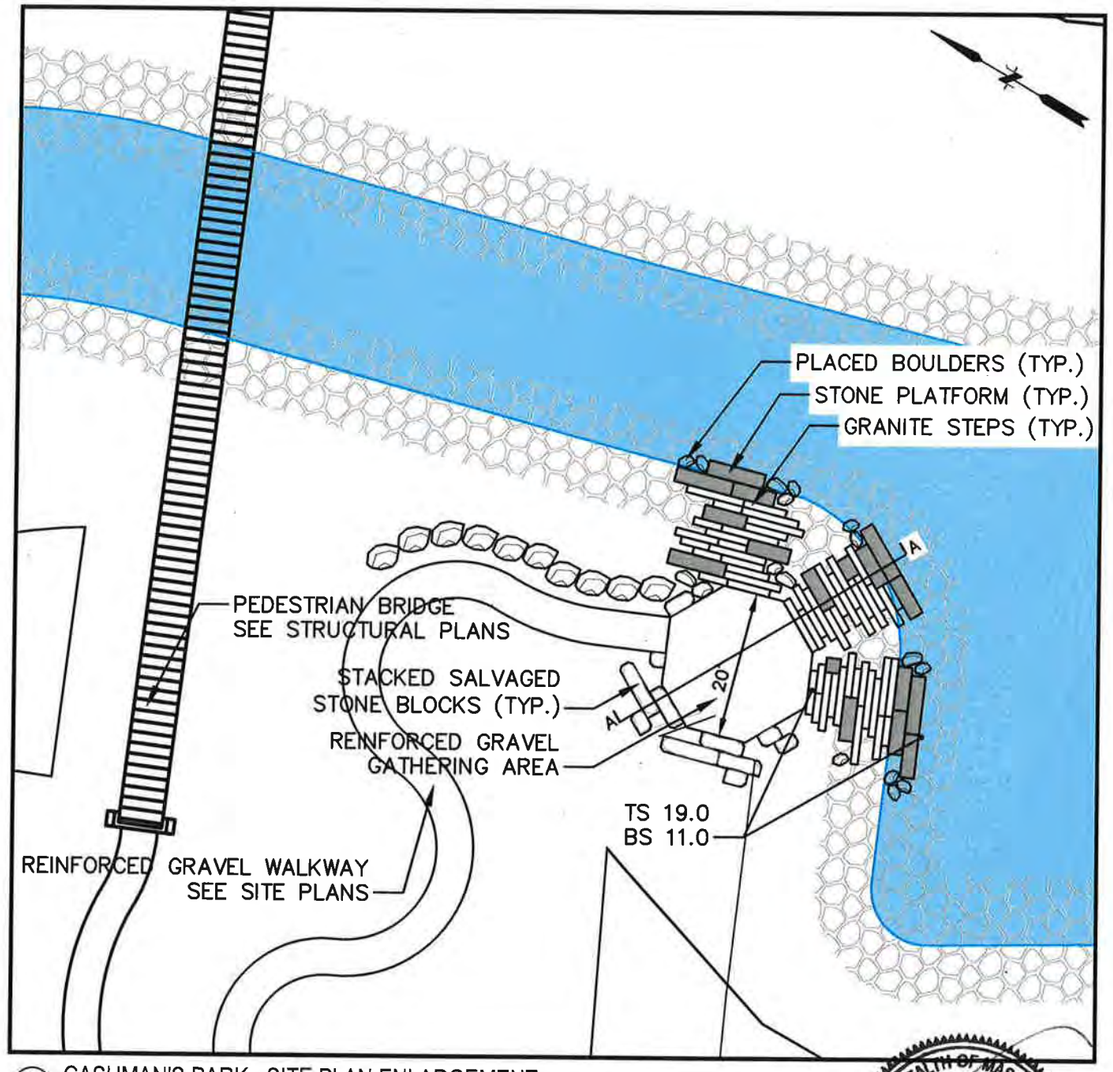

2 CASHMAN'S PARK - SITE PLAN ENLARGEMENT
SCALE: 1" = 20'

COMMONWEALTH OF MASSACHUSETTS
DEAN E. AUDET
CIVIL
No. 45977
REGISTERED PROFESSIONAL ENGINEER

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ.: 1" = 20'
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0 10 20
GRAPHIC SCALE

CITY OF HAVERHILL

PLANTING PLAN ENLARGEMENTS

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

LA-106

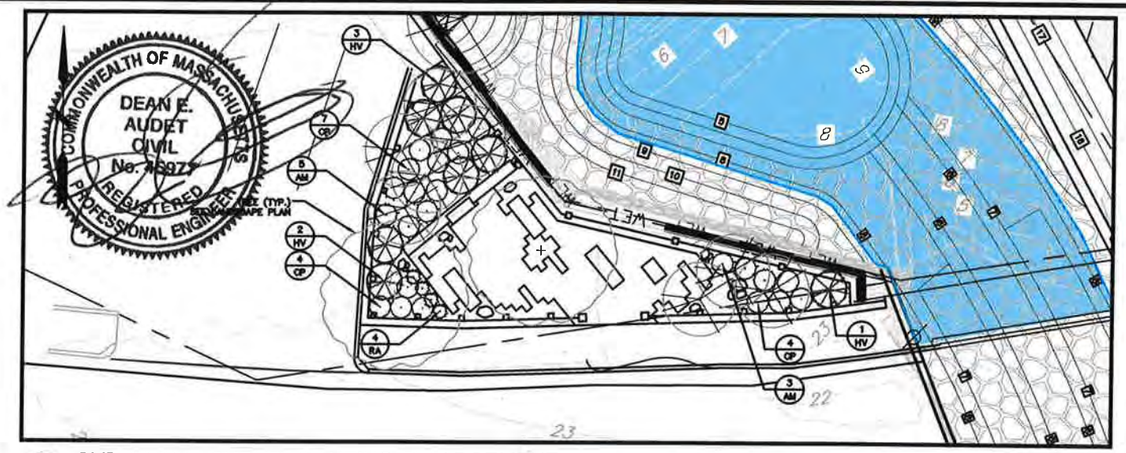

1 OVERLOOK - SHRUB PLANTING ENLARGEMENT
SCALE: 1" = 20'

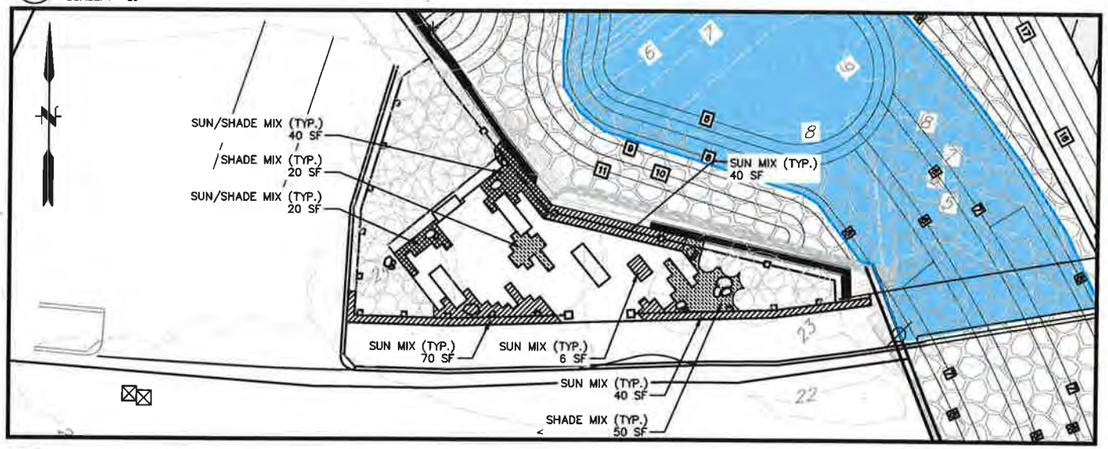

2 OVERLOOK - PERENNIAL PLANTING ENLARGEMENT
SCALE: 1" = 20'

PLANT LIST

KEY	BOTANICAL NAME	COMMON NAME	QTY	SIZE
	SHRUBS			
AM	ARONIA MELANOCARPA	BLACK CHOKEBERRY	8	3 GAL.
CP	CLETHRA ALNIFOLIA	SWEET PEPPERBUSH	33	3 GAL.
HV	HAMAMELIS VIRGINIANA	WITCH HAZEL	16	5-6' HT.
IG	ILEX GLABRA	INKBERRY	6	5 GAL.
IV	ILEX VERTICILLATA 'RED SPRITE'	RED SPRITE WINTERBERRY	16	3 GAL.
RA	RHUS AROMATICA 'GRO LOW'	GRO LOW SUMAC	4	3 GAL.

SUN MIX
PLANT THE FOLLOWING SPECIES AT 18" O.C. IN EQUAL QUANTITIES
- –CAREX ROSEA (ROSY SEDGE)
- –PANICUM VIRGATUM (SWITCHGRASS)
- –ASTER NOVAE–ANGLIAE (NEW ENGLAND ASTER)
- –ASCLEPIAS TUBEROSA (BUTTERFLY MILKWEED)

SHADE MIX
PLANT THE FOLLOWING SPECIES AT 18" O.C. IN EQUAL QUANTITIES
- –DENNSTAEDIA PUNCTILOBULA (HAY–SCENTED FERN)
- –THELYPTERIS NOVEBORACENSIS (NEW YARD FARN)
- –AQUILEGIA CANADENSIS (RED COLUMBINE)
- –CAREX ROSEA (ROSY SEDGE)

SUN/SHADE MIX
PLANT THE FOLLOWING SPECIES AT 18" O.C. IN EQUAL QUANTITIES
- –DENNSTAEDIA PUNCTILOBULA (HAY–SCENTED FERN)
- –ASTER NOVAE–ANGLIAE (NEW ENGLAND ASTER)
- –ASCLEPIAS TUBEROSA (BUTTERFLY MILKWEED)
- –CAREX ROSEA (ROSY SEDGE)

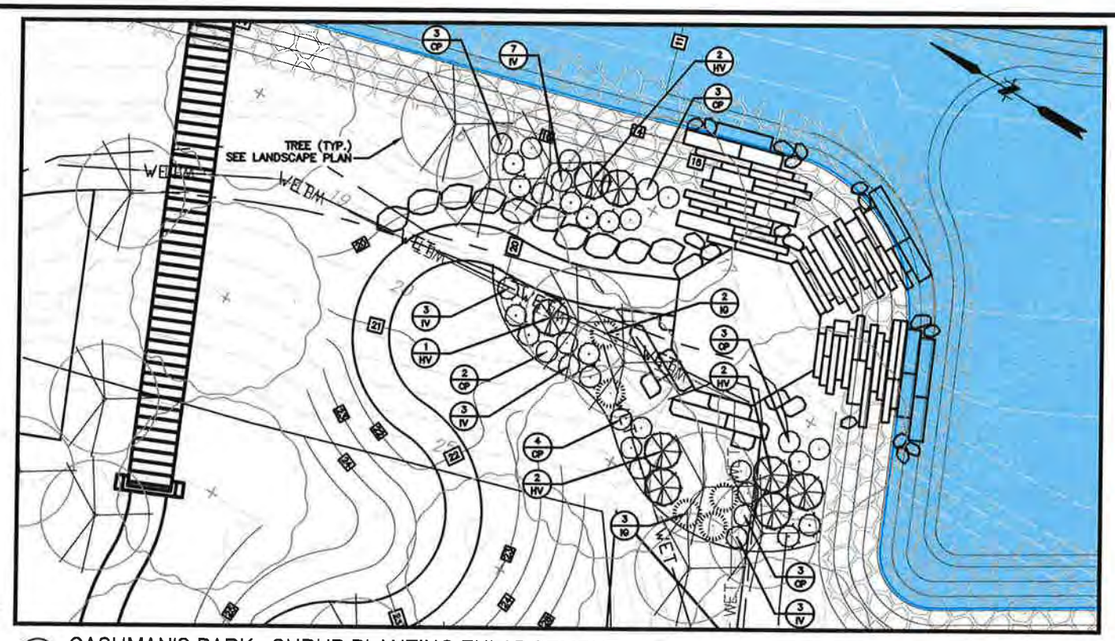

3 CASHMAN'S PARK - SHRUB PLANTING ENLARGEMENT
SCALE: 1" = 20'

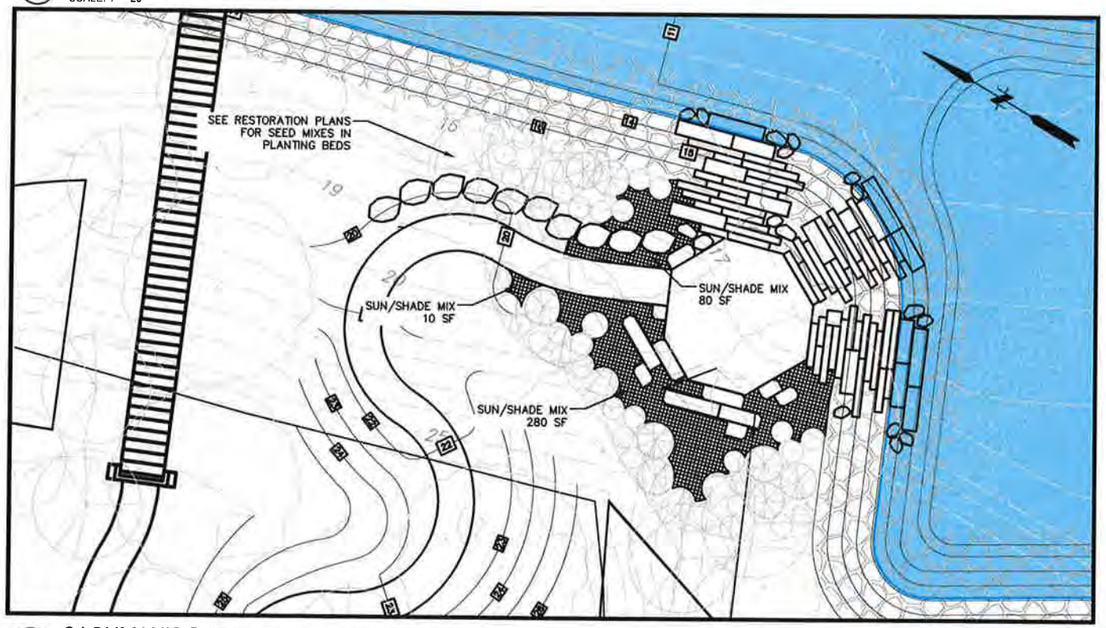

4 CASHMAN'S PARK - PERENNIAL PLANTING ENLARGEMENT
SCALE: 1" = 20'

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ.: 1" = 20'
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0 10 20
GRAPHIC SCALE

CITY OF HAVERHILL

SITE PLAN ENLARGEMENTS

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

LA-105

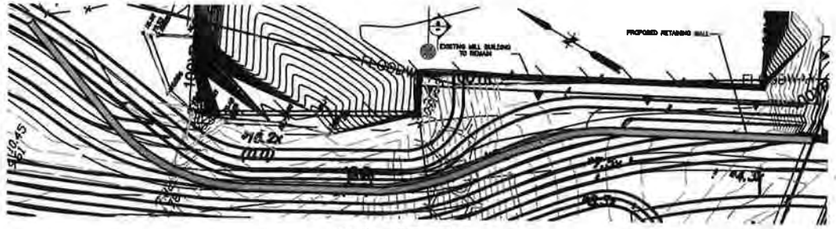

PLAN – LEFT WALL

PLAN – RIGHT WALL

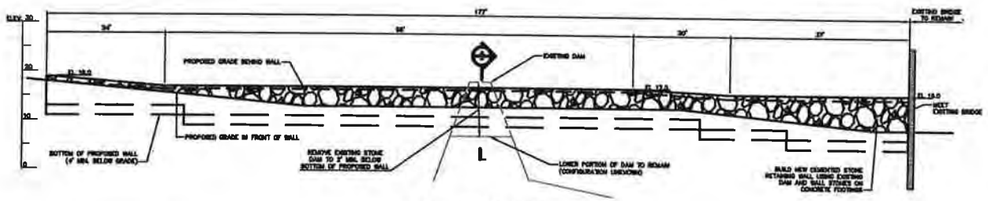

LEFT WALL ELEVATION

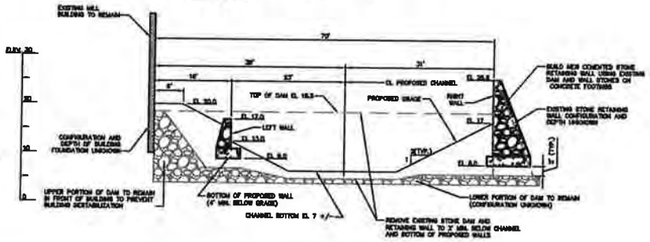

SECTION A – LOOKING DOWNSTREAM AT DAM

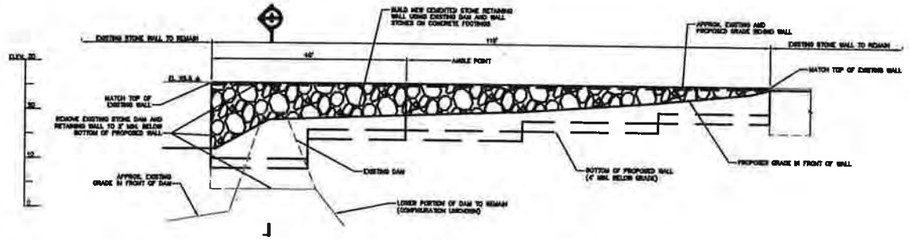

RIGHT WALL ELEVATION

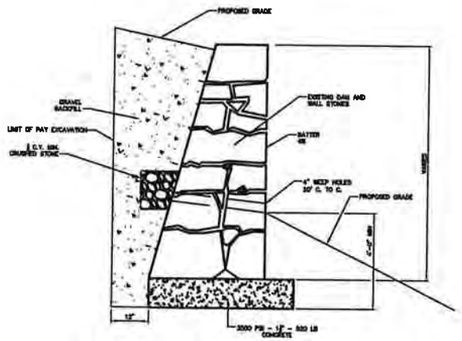

TYPICAL SECTION – CEMENTED STONE MASONRY WALL

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

SCALE:
HORZ.: 1" = 30'
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0 15 30
GRAPHIC SCALE

FUSS & O'NEILL
1550 MAIN STREET, SUITE 400
SPRINGFIELD, MA 01103
413.452.0445
www.fando.com

CITY OF HAVERHILL

RETAINING WALL DETAILS

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

S-101

LAYER STATE:
MS VIEW:

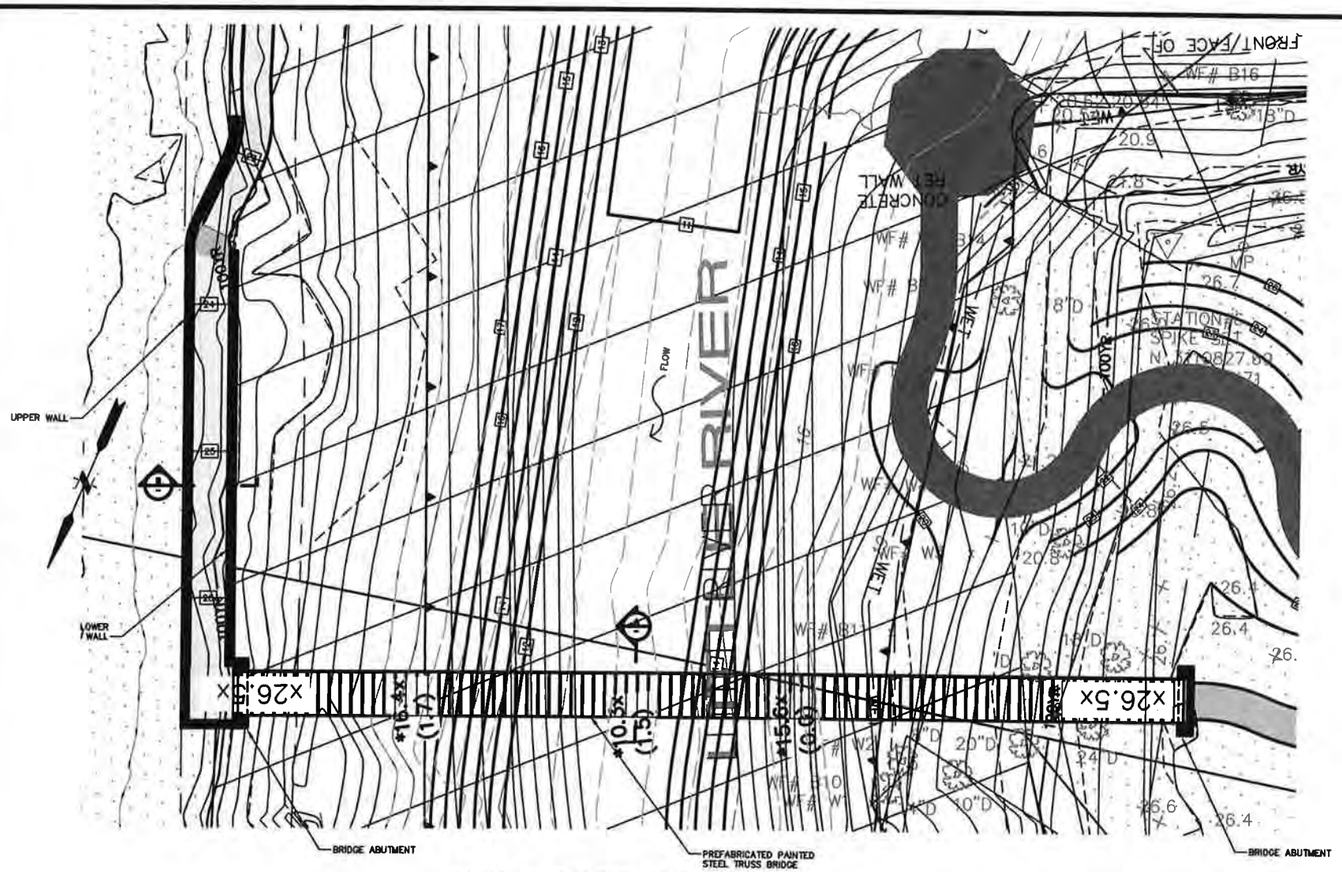

PLAN – PEDESTRIAN BRIDGE
SCALE: 1"=20'

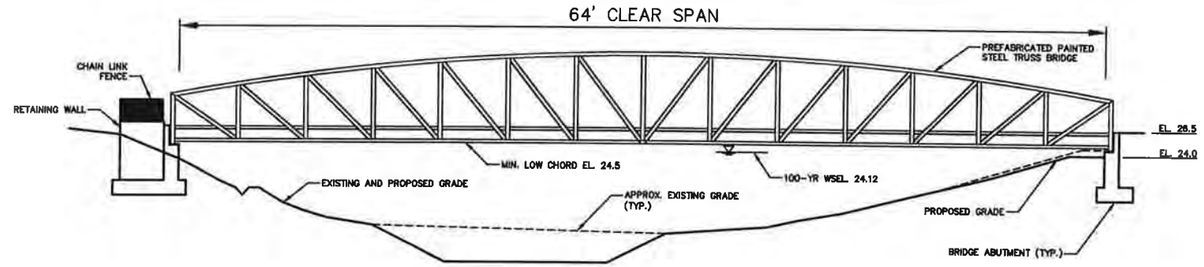

PEDESTRIAN BRIDGE NORTH ELEVATION
SCALE: 1"=20'

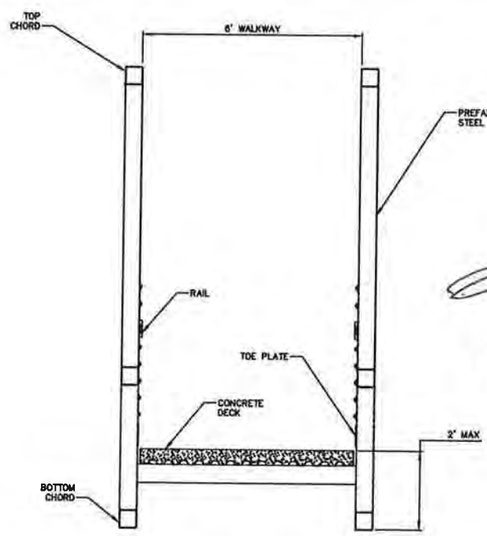

SECTION A – BRIDGE SECTION
SCALE: 1"=1'-0"

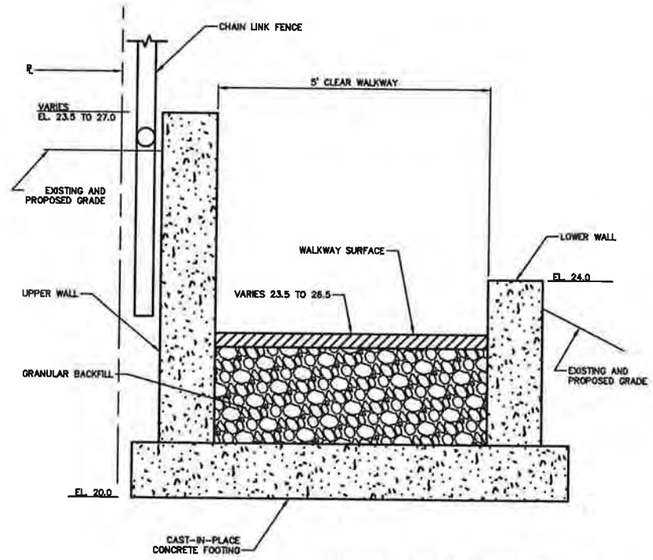

SECTION B – RETAINING WALL SECTION
SCALE: 3/8"=1'-0"

COMMONWEALTH OF MASSACHUSETTS
DEAN E. AUDET
CIVIL
No. 45977
REGISTERED
PROFESSIONAL ENGINEER

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER

LAYER STATE:
MS VIEW

SCALE:
HORZ.:
VERT.:
DATUM:
HORZ.: NAD83
VERT.: NAVD88
0
GRAPHIC SCALE

FUSS & O'NEILL
1550 MAIN STREET, SUITE 400
SPRINGFIELD, MA 01103
413 452 0445
www.fando.com

CITY OF HAVERHILL

PEDESTRIAN BRIDGE DETAILS

LITTLE RIVER DAM REMOVAL AND RESTORATION

HAVERHILL MASSACHUSETTS

PROJ. No.: 20170390.U30
DATE: JUNE 2022

S-102