



# Haverhill

Robert E. Ward, DPW Director  
Water/Wastewater Division  
Phone: 978-374-2382 Fax: 978-521-4083  
[rward@haverhillma.gov](mailto:rward@haverhillma.gov)

October 28, 2024

Ms. Elizabeth Kudarauskas  
U.S. EPA – New England, Region 1  
5 Post Office Square, Suite 100  
Boston, MA 02109-3912

Subject: City of Haverhill, MA NPDES Permit #MA 0101621  
Consent Decree Submittal (Civil Action No. 16-11698-IT)  
Compliance Report Number 16

Dear Ms. Kudarauskas:

Enclosed is Compliance Report No. 16 as required by Section IX.67 of the Consent Decree. This report is for January 1, 2024 through June 30, 2024, reporting period.

If you require additional information, please call me at (978) 374-2382.

Sincerely,

Robert E. Ward  
DPW Director

Enclosure(s)

cc: Chief, Environmental Enforcement Section, U.S. DOJ  
Joshua S. Levy, Acting U.S. Attorney, MA District  
Michael Wagner, USEPA, [wagner.michael@epa.gov](mailto:wagner.michael@epa.gov)  
Belinda Stansbury, MassDEP, [Belinda.Stansbury@state.ma.us](mailto:Belinda.Stansbury@state.ma.us)  
I. Andrew Goldberg, MA Assistant Attorney General, [andy.goldberg@state.ma.us](mailto:andy.goldberg@state.ma.us)  
Mayor Melinda E. Barrett, City of Haverhill, [mayor@cityofhaverhill.com](mailto:mayor@cityofhaverhill.com)  
Michael Leon, Nutter, McClennen & Fish LLP, [MLeon@nutter.com](mailto:MLeon@nutter.com)  
Paul Jessel, Wastewater, [pjessel@haverhillma.gov](mailto:pjessel@haverhillma.gov)  
Isaiah Lewis, WWTP Facility Manager, [ilewis@haverhillma.gov](mailto:ilewis@haverhillma.gov)  
Kevin Olson, Wright-Pierce, [kmo@wright-pierce.com](mailto:kmo@wright-pierce.com)



CITY OF HAVERHILL, MASSACHUSETTS  
NPDES PERMIT No. MA0101621  
CONSENT DECREE  
(Civil Action No. 16-11698-IT, 11/10/16)

COMPLIANCE REPORT No. 16  
JANUARY- JUNE 2024

SUBMITTED

OCTOBER 2024

# TABLE OF CONTENTS

SECTION 1	INTRODUCTION .....	1-1
1.1	BACKGROUND .....	1-1
1.2	Report Organization.....	1-1
1.3	Certification Statement .....	1-2
SECTION 2	IDDE PROGRAM .....	2-1
2.1	Introduction.....	2-1
2.2	Current Revised Priority Listing.....	2-1
2.3	IDDE Investigation Progress Reporting .....	2-2
2.4	Identified Illicit Connections and Current PRIORITY LIST Status Resolution .....	2-19
SECTION 3	SSO & BUILDING/PRIVATE PARTY BACKUP EVENTS .....	3-1
3.1	SSO ACTIVITY .....	3-1
SECTION 4	CONSTRUCTION SITE INSPECTION AND ENFORCEMENT PROGRAM .....	4-1
4.1	ENFORCEMENT ACTIVITY .....	4-1
SECTION 5	GENERAL STATUS.....	5-2
5.1	Introduction.....	5-2
5.2	Issues of Noncompliance .....	5-4
5.3	Looking Ahead - Six Month Forecast.....	5-4
SECTION 6	SECONDARY TREATMENT BYPASS.....	6-1
6.1	INTRODUCTION .....	6-1
6.2	Bypass Events .....	6-1
6.3	RAINFALL DATA.....	6-2
SECTION 7	CMOM CORRECTIVE ACTION PLAN .....	7-1
7.1	INTRODUCTION .....	7-1
7.2	CMOM CORRECTIVE ACTIONS .....	7-1
7.3	ADDITIONAL cmom-related ACTIVITIES .....	7-1
7.4	REMAINIG DEFICIENCIES.....	7-5

## Appendices

APPENDIX A- CMMS GENERATED WORK ORDERS
APPENDIX B- IDDE PROGRAM SUPPORTING DOCUMENTS
APPENDIX C- BYPASS SUPPORTING DOCUMENTS
APPENDIX D- CMMS WORK ORDERS FOR BASEMENT SEWER BACKUP
APPENDIX E- CCTV INSPECTION MAP

## List Of Tables

TABLE 2-1 PRIORITIZED LIST OF OUTFALL SUB-AREA INVESTIGATION.....	2-3
TABLE 2- 2 SUMMARY OF IDDE INVESTIGATIONS OF SYSTEMS WITH POTENTIAL ILLCIT CONNECTIONS BY BASIN .....	2-5
TABLE 2- 3 OUTFALL MAINTENANCE PRIORITY TABLE .....	2-9
TABLE 2- 4 SUMMARY OF ILLICIT DISCHARGES IDENTIFIED BY BASIN AND CURRENT STATUS .....	2-19
TABLE 3-1 SANITARY SEWER OVERFLOW EVENTS.....	3-2
TABLE 5- 1 MBTA/GREYSTONE TIMELINE .....	5-3
TABLE 5- 2 SUBMISSIONS WITHIN CURRENT REPORTING PERIOD.....	5-4
TABLE 5-3 DELIVERABLES DURING THE NEXT REPORTING PERIOD (July to December 2024) .....	5-4
TABLE 6- 1 SECONDARY TREATMENT BYPASS EVENTS .....	6-1
TABLE 7- 1 CMOM DEFICIENCIES COMPLETED.....	7-2



## **SECTION 1 INTRODUCTION**

### **1.1 BACKGROUND**

The United States Environmental Protection Agency (EPA), Massachusetts Department of Environmental Protection (MassDEP), and the City of Haverhill entered into a Consent Decree to require the City to take measures necessary to meet the requirements of the Clean Water Act and the Massachusetts Clean Water Act, and to achieve and maintain compliance with the Small Municipal Separate Stormwater Sewer System (MS4) General Permit and the Publicly Owned Treatment Works (POTW) Permit, and all applicable federal and state regulations. The effective date of the Consent Decree is November 10, 2016.

As part of the Consent Decree, the City is required to submit a Compliance Report to EPA and MassDEP for the previous six-month period, referred to as a “Reporting Period.” The bi-annual Reporting Periods run from January through June and July through December, with the Compliance Reports due on April 30<sup>th</sup> and October 31<sup>st</sup> for the previous period.

The goal of this Compliance Report is to provide the EPA and MassDEP an updated summary of the work performed by the City to achieve and maintain compliance over the course of the Reporting Period.

### **1.1 VACANT POSITIONS**

The Water/Wastewater Engineer position remains vacant. Every effort continues to be made to fill this critical role. At this time, the City is also working to hire two qualified collections system operators, a senior operator and a maintenance mechanic for the WWTP. The Collection System Supervisor position is advertised for hire as an anticipated opening. The City continues to look for a long-term solution for this critical role. This position is currently being filled by a former City Employee.

### **1.2 REPORT ORGANIZATION**

The Compliance Report is divided into several sections including:

- Section 2 IDDE Program
- Section 3 SSO and Building/Private Party Backup Events
- Section 4 Construction Site Inspection and Enforcement Program
- Section 5 General Status
- Section 6 Secondary Treatment Bypass
- Section 7 CMOM Corrective Action Plan (per MassDEP request)


Each section summarizes the City’s actions, activities, and events that have occurred during the Reporting Period in accordance with the Consent Decree.

### 1.3 CERTIFICATION STATEMENT

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.



Robert E. Ward  
DPW Director  
City of Haverhill, Massachusetts



(date)

## SECTION 2 IDDE PROGRAM

### 2.1 INTRODUCTION

The City identified and inspected 1,200 stormwater outfalls (thirteen of these outfalls are shared stormwater/combined sewer overflow (CSO) outfalls) as part of the 2014/2015 Stormwater Outfall Inspection Report. Based on the findings, the City established a draft schedule of prioritized inspections.

In 2017, the City prepared the “Illicit Discharge Detection and Elimination (IDDE) Manual.” The manual identified the procedures that the City will follow to continue their comprehensive inspections of its stormwater outfalls, upstream system investigations, and enforcement procedures when an illicit connection is identified. Most recently, the IDDE Manual was updated in 2020 to be in compliance with the City’s MS4 permit.

The IDDE Manual can be found on the City’s Stormwater website at:  
[www.cityofhaverhill.com/departments/storm\\_water\\_program/index.php](http://www.cityofhaverhill.com/departments/storm_water_program/index.php)

### 2.2 CURRENT REVISED PRIORITY LISTING

The City continues to conduct IDDE sampling and update priorities based on field investigation and lab analysis testing results. The current IDDE investigation priorities as of July 2024 are shown in Table 2-1. The current priorities categories reflect the following inventory: four Problem Priority outfalls; three High Priority outfalls; and thirty-four Low Priority outfalls. Table 2-1 has been updated with the most recent sampling results for each outfall. The priority listing of outfalls, with sample results, is also available at the City’s stormwater website.

[https://www.cityofhaverhill.com/departments/storm\\_water\\_program/index.php](https://www.cityofhaverhill.com/departments/storm_water_program/index.php)

### **2.3 IDDE INVESTIGATION PROGRESS REPORTING**

Table 2-2 shows the City’s progress to date on their IDDE investigations during the reporting period (January through June 2024). Updated results for outfall catchment areas have been updated on Table 2-2 and IDDE catchment investigation maps in Appendix. Table 2-3 shows the City’s current list of priority outfalls for maintenance.

Using GIS, the City identified a total of 26.12 miles of storm drain piping and 2,617 drainage manholes and catch basins in the tributary area upstream of the outfalls included in the Priorities List as Problem, High, Low priorities. The total length investigated is included and updated from previous reporting for a cumulative percentage investigated. Some outfalls are considered fully investigated if there is no flow in an upstream asset.

During this reporting period 7 outfalls were re-inspected from the Outfall Maintenance Priority Table (2-3) for dry weather flow. Four of the seven outfalls inspected during this reporting period were observed as having no flow during dry weather or were completely buried, three of the outfalls were incorrectly marked assets within our GIS system and removed from our list as well as the table. The buried outfalls that require further location have been assigned work order numbers and will undergo future maintenance.

Table 2- 1- Prioritized List of Outfall Sub-Area Investigations  
 BASED ON OUTFALL INSPECTION PROGRAM  
 2014-2024 Dry-Weather MS4/Stormwater Outfall Inspection Program  
 Summary of Water Quality Testing of Dry Weather Flow at MS4/CSO Outfalls

Outfall Information					Field Inspection Information		Dry-Weather Flow Characteristics					Field Parameter Test Results							Coliform Laboratory Sampling/Analysis					
					Date	Previous Rainfall	Flow Description	Odor	Color	Floatables	Turbidity	Sample Time	Sample Temp (F)	pH	Conductivity	Ammonia (mg/l)	Surfactants (mg/l)	Chlorine (mg/l)	Sample Date for Bacteria	Previous Rainfall (inches)	Previous Rainfall (Date)	Previous Rainfall (End Time)	E.coli (MPN/ 100 ml)	Enterococcus (MPN/ 100 ml)
GIS Identifier	Diameter	Material	Outfall Location	Owner-ship	Problem Priority																			
UNK0955	36"	RCP	South Main Street (Dominator Plaza)	City	09/16/20	.01" on 9/13/20	Trickle	None	Clear	None	None	725	62.2	7	1630	0.13	0.1	0	09/16/20	0.1	09/13/20		>2400	
PL0891	30"	RCP	Main Street @ Marsh Avenue	City	05/02/22	.4" on 4/27/22	Moderate	None	None	None	Clear	710	45	6.8	1470	0.2	0	0	05/02/22	0.4	04/27/22	225	15406	
PL0891 wet weather	30"	RCP	Main Street @ Marsh Avenue	City	05/02/23	Current	Moderate	None	None	None	Clear	904	52	6.8	908	0.37	0.28	0	05/02/23	Current			687	
MR1109	12"	RCP	350 Water Street	City	11/09/20	.01" on 11/3/20	Trickle	None	None	None	None	930	59.3	7.31	3	0	0	0	12/10/15	0.1	12/03/15		1413.6	> 2420
UNK1767	36"	CMP	Tudor Court	City	06/23/20	.02" on 06/11/20	Trickle	None	Clear	None	Clear	750	64	7	453	0.07	0	0	06/23/20	0.2	06/11/20		>2400	
UNK1767 wet weather	36"	CMP	Tudor Court	City	05/02/23	Current	Moderate	None	None	None	Clear	955	39	6.9	620	0.083	0	0	05/02/23	Current			4727	
High Priority																								
LR1260	3'x4'	other, blocks	140 Hale Street	City	05/02/22	.4" on 04/27/22	Trickle	None	None	None	None	745	42	7.4	608	0.14	0	0.02	05/02/22	0.4	04/27/22	225	195.99	
UNK1166	34"	RCP	8 Franzone Drive	City	06/11/20	0.01 on 06/11/20	Substantial	None	Clear	None	Clear	831	62	6.5	1000	0.09	0	0.03	06/11/20	0.01	06/11/20		461.1	
UNK1177	48"	RCP	Franzone Drive	City	06/11/20	0.01" on 06/11/20	Substantial	None	Clear	None	Clear	925	63	6.1	1000	0.1	0.15	0.01	06/11/20	0.01	06/11/20		770.1	
Low Priority																								
BZB0847	15"	RCP	Fermanagh Street	City	05/02/22	.4" on 04/27/22	Trickle	None	Clear	None	None	830	54	6.9	727	1.42	0	0	05/02/22	0.4	04/27/22	225	4874	
MR20718	10"	RCP	1 Water Street	City	08/14/15	0.57" on 08/11/15	No Information	None	None	None	None	1000	78	7.99	2		0	0	08/31/15	0.19	08/23/15		556	631
FBO0638	12"	RCP	Hilldale Avenue	City	05/11/22	.2" on 05/04/22	No Flow																	
PL1222	36"	RCP	West Gile Street	City	05/11/22	.2" on 05/04/22	Substantial	None	None	None	None	805	48	7.3	545	0.25	0.07	0	05/11/22	0.2	05/04/22	1325	2419.57	
UNK0661	24"	RCP	Parkridge Road	City	05/02/22	.4" on 04/27/22	Trickle	None	Clear	None	None	910	48	6.4	1880	0	0	0	05/02/22	0.4	04/27/22	225	31.29	
MR0982	18"	CLAY	20 Back Lane	City	05/11/22	.2" on 05/04/22	Trickle	None	None	None	None	730	49	8.6	374	0.17	0	0	05/11/22	0.2	05/04/22	1325	12.11	6.2
MR23912	8"	STEEL	120 Merrimack Street	City	05/10/22	.2" on 05/04/22	No Flow																	
MR1140	15"	RCP	River Street	City	11/04/21	1.9" on 10/31/21	Trickle	None	None	Other	Cloudy	1045	42.6	8.18	484	0	0		11/13/14	0.06	11/07/14		62.4	
MR0834	48"	RCP	Merrimac River (Bradley Avenue)	City	06/30/21	.01" on 06/25/21	No Flow																	
MR0662	18"	RCP	Parkridge Road	City	05/25/22	2" on 05/22/22	Trickle	None	Clear	None	None	845	54	7.3	1061	0.12	0	0.02	05/25/22	0.2	05/22/22		0	
LR0963	15"	HDPE	Alvanos Street	City	06/07/22	.1" on 06/03/22	Trickle	None	Clear	None	None	725	49	7.2	1146	0.12	0.07	0	06/07/22	0.1	06/03/22	915	23	
CB1198	NA	RCP	Research Drive	City	11/04/14	0.25" on 11/02/14	Moderate	None	Clear	None	Clear	1003	50.2	7.06	208	0	0.25		11/13/14	0.06	11/07/14		21.3	
MR0770	36"	RCP	Merrimac River (River Street)	City	09/23/14	0.36" on 09/21/14	Trickle	None	Clear	None	Clear	930	60.6	7.86	713	0	0.25		09/30/14	0.01	09/29/14		19.9	

Table 2- 1- Prioritized List of Outfall Sub-Area Investigations  
 BASED ON OUTFALL INSPECTION PROGRAM  
 2014-2024 Dry-Weather MS4/Stormwater Outfall Inspection Program  
 Summary of Water Quality Testing of Dry Weather Flow at MS4/CSO Outfalls

Outfall Information					Field Inspection Information							Dry-Weather Flow Characteristics							Field Parameter Test Results							Coliform Laboratory Sampling/Analysis					
					Date	Previous Rainfall	Flow Description	Odor	Color	Floatables	Turbidity	Sample Time	Sample Temp (F)	pH	Conductivity	Ammonia (mg/l)	Surfactants (mg/l)	Chlorine (mg/l)	Sample Date for Bacteria	Previous Rainfall (inches)	Previous Rainfall (Date)	Previous Rainfall (End Time)	E.coli (MPN/ 100 ml)	Enterococcus (MPN/ 100 ml)							
GIS Identifier	Diameter	Material	Outfall Location	Owner-ship	UNK1836	36"	RCP	Computer Drive	City	05/25/22	.2" on 05/22/2022	Trickle	None	Clear	None	Clear	800	51	7.06	6	0.155	0.06	0.05	05/25/22	0.2	05/22/22	2110	0			
UNK1011	24"	RCP	Lake Street	City	06/15/22	.01" on 06/13/22	Trickle	None	None	None	None	None	815	61	8.2	1795	0	0	0	06/15/22	0.01	06/13/22	0045	8.52							
UNK0627	15"	RCP	Haley Road	City	05/21/15	0.07" on 05/19/15	No Information	None	None	None	None	None	840	64.5	6.82	791	0	0	0.25	05/22/15	0.07	05/19/15		2							
DPI0947	18"	RCP	177 Brook Street	City	06/15/22	.01" on 06/13/22	Trickle	None	None	None	None	None	855	60	7.8	1144	0	0	0.02	06/15/22	0.01	06/13/22	0045	34.51							
UNK1189	NA	NA	Primrose Street (DPW)	City	06/15/22	.01" on 06/13/22	No Flow																								
TS0984	24"	RCP	Newton Road	City	05/11/15	0.03" on 05/12/15	Moderate	None	Brown	None	Slight Cloudiness	1111	62.2	6.81	76	0	0	0.25	05/22/15	0.07	05/19/15		<1								
TS0989	24"	RCP	Newton Road	City	05/18/15	0.03" on 05/12/15	Substantial	None	Clear	None	Slight Cloudiness	1100	63.3	7.2	48	0	0	0.25	05/22/15	0.07	05/19/15		<1								
UNK1750	24"	RCP	36 Magnavista Drive	City	05/18/15	0.03" on 05/12/15	Trickle	None	None	None	None	955	64.7	7.6	574	0	0	0.25	05/22/15	0.07	05/19/15		<1								
UNK1040	24"	RCP	Gile Street	City	11/04/21	1.9" on 10/31/21	Trickle	None	None	None	None	930	63.1	7.3	877	0	0	0	05/22/15	0.07	05/22/15		<1								
UNK0902	40"	CMP	Shelley Road - Culvert	City	11/04/21	1.9" on 10/31/21	Moderate	None	Clear	None	Clear		62.6	7.02	1567	0	0	0													
DPO1007	54"	CMP	Kenilworth Lane	City	05/19/21	44697	No Flow																								
UNK0848	18"	RCP	Woodrow Avenue	City	09/09/20	.1" on 09/03/20	No Flow																								
FB0723	18"	RCP	Hanna Ridge Road	City	07/31/19	1.2" on 07/23/19	Moderate	None	None	None	Clear	923	76.6	7.77	440	0	<0.05	0	07/31/19	1.2	07/23/19	1045	8.5								
UNK0888	NA	NA	West Lowell Street	City	06/12/15	0.1" on 06/06/15	Moderate																								
UNK1188	32"	RCP	Primrose Street	City	07/16/19	0.45" on 07/12/19	Trickle	None	None	None	Clear	930	73.9	7.48	855	0.5	<0.05	0	07/16/29	0.45	07/12/19	2045	770.1								
MR38714	6"	PVC	Parkridge Road - Stream Convey	City	06/14/22	.01" on 06/13/22	No Flow																								
MR38718	18"	RCP	Merrimack River	City	09/26/19	0.01" on 09/23/19	Trickle	None	None	None	Clear	1013	68.1	8.01	509	0	<0.05	0	09/29/19	0.01	09/23/19	2240	>2400								
UNK1011	24"	RCP	Lake Street	City	06/15/22	.01" on 06/13/22	Trickle	None	None	None	None	815	61	8.2	1795	0	0	0	06/15/22	0.01	06/13/22	0045	8.52								
UNK0627	15"	RCP	Haley Road	City	05/21/15	0.07" on 05/19/15	No Information	None	None	None	None	840	64.5	6.82	791	0	0	0.25	05/22/15	0.07	05/19/15		2								
DPI0947	18"	RCP	177 Brook Street	City	06/15/22	.01" on 06/13/22	Trickle	None	None	None	None	855	60	7.8	1144	0	0	0.02	06/15/22	0.01	06/13/22	0045	34.51								
LR39512	48"	RCP	Little River	City	07/31/19	1.2" on 7/23/19	No Flow																								

**NOTE:** Data exceeds one of the parameter thresholds that suggest it should be added to the IDDE program

Laboratory Sampling Dates in Red are the samples taken with less than 48 hours of dry weather.

Table 2-2 SUMMARY OF IDDE INVESTIGATIONS OF SYSTEMS WITH POTENTIAL ILLICIT CONNECTIONS BY BASIN

(BASED ON OUTFALL INSPECTION PROGRAM)

2014-2024 Dry-Weather MS4/Stormwater Outfall Inspection Program

IDDE INVESTIGATION PRIORITIES

		Current Report Period						Completed to Date			
		January 2024 - June 2024						Including this Reporting Period			
Basin ID	Outfall ID	Existing System Estimates		Investigated				Complete to Date			
		Length of Pipe (ft)	Number of Manholes and Catch Basins	Length of Pipe (ft)	Percent Completed	Number of Manholes and Catch Basins	Percent Completed	Length of Pipe (ft)	Percent Completed	Number of Manholes and Catch Basins	Percent Completed
Buswell Brook	BZB0847	1,697	24					1,697	100%	24	100%
Buswell Brook TOTAL		1,697	24	0	0%	0	0%	1,697	100%	24	100%
Creek Brook	CB1193	70	0					70	100%		
	CB1198	144	5					144	100%	5	100
	CB1710	71	0					71	100%		
Creek Brook Outlet TOTAL		285	5	0	0%	0	0%	285	100%	5	100%
Detention Pond Outlet	DPO0657	422	7								
	DPO0696	61	2					61	100%	2	100%
	DPO1079	37	0								
Detention Pond Outlet TOTAL		520	9	0	0%	0	0%	61	12%	2	22%
Detention Pond Inlet	DPI0946	7,421	172					7,421	100%	172	100%
	DPI0947	1,360	11								
	DPI0969	1,515	22								
	DPI1007	1,634	0								
	DPI1074	694	14								
	DPI1094	22	0					22	100%		
Detention Pond Inlet TOTAL		12,646	219	0	0%	0	0%	7,443	59%	172	79%
Fishing Brook	FBO0638	852	15					852	100%	15	100%
Fishing Brook TOTAL		852	15	0	0%	0	0%	852	100%	15	100%
Frey's Pond	FP7115	72	3					72	100%	3	100%
Frey's Pond TOTAL		72	3	0	0%	0	0%	72	100%	3	100%
Johnston's Creek	JC1028	1,397	12					1,397	100%	12	100%
Johnston's Creek TOTAL		1,397	12	0	0%	0	0%	1,397	100%	12	100%
Little River	LR0952	7,268	88					7,268	100%	88	100%
	LR0963	703	11								
	LR0993	539	4					539	100%	4	100%
	LR0995	822	0								



Table 2-2 SUMMARY OF IDDE INVESTIGATIONS OF SYSTEMS WITH POTENTIAL ILLICIT CONNECTIONS BY BASIN

(BASED ON OUTFALL INSPECTION PROGRAM)

2014-2024 Dry-Weather MS4/Stormwater Outfall Inspection Program

IDDE INVESTIGATION PRIORITIES

		Current Report Period						Completed to Date			
		January 2024 - June 2024						Including this Reporting Period			
Basin ID	Outfall ID	Existing System Estimates		Investigated				Complete to Date			
		Length of Pipe (ft)	Number of Manholes and Catch Basins	Length of Pipe (ft)	Percent Completed	Number of Manholes and Catch Basins	Percent Completed	Length of Pipe (ft)	Percent Completed	Number of Manholes and Catch Basins	Percent Completed
	LR1103	4,418	4					4,418	100%	4	100%
	LR1260 <sup>1</sup>	26,134	614					26,134	100%	622	100%
Little River TOTAL		39,884	721	0	0%	0	0%	38,359	96%	718	100%
Merrimack River	MR0662	210	5								
	MR0770	2,980	47								
	MR0834	756	8					756	100%	8	100%
	MR0982	128	10					128	100%	10	100%
	MR1109	941	12					941	100%	12	100%
	MR1138	289	18					289	100%	18	100%
	MR1140	90	2								
	MR1141 <sup>2</sup>	3,899	104					3,899	100%	104	100%
	MR1164	1,746	116					1,746	100%	116	100%
	MR20718	NA									
	MR23912	0	1								
	MR38718	1,713	30					1,713	100%	30	100%
	MR24314	541	24					541	100%	24	100%
Merrimack River TOTAL		13,293	377	0	0%	0	0%	10,013	75%	322	85%
Pentucket Lake	PL0891	5,463	128					5,463	100%	128	100%
	PL1222 <sup>1</sup>	3,292	102					3,292	100%	102	100%
Pentucket Lake TOTAL		8,755	230	0	0%	0	0%	8,755	100%	230	100%
Tilton Swamp	TS0984	52	1					52	100%	1	100%
	TS0989	3,893	47								
Tilton Swamp		3,945	48	0	0%	0	0%	52	1%	1	2%
Unknown	UNK0627	254	8								
	UNK0661	410	11					410	100%	11	100%
	UNK0668	854	18								
	UNK0788	869	16					869	100%	16	100%
	UNK0836	842	12								

Table 2-2 SUMMARY OF IDDE INVESTIGATIONS OF SYSTEMS WITH POTENTIAL ILLICIT CONNECTIONS BY BASIN

(BASED ON OUTFALL INSPECTION PROGRAM)

2014-2024 Dry-Weather MS4/Stormwater Outfall Inspection Program

IDDE INVESTIGATION PRIORITIES

		Current Report Period						Completed to Date			
		January 2024 - June 2024						Including this Reporting Period			
Basin ID	Outfall ID	Existing System Estimates		Investigated				Complete to Date			
		Length of Pipe (ft)	Number of Manholes and Catch Basins	Length of Pipe (ft)	Percent Completed	Number of Manholes and Catch Basins	Percent Completed	Length of Pipe (ft)	Percent Completed	Number of Manholes and Catch Basins	Percent Completed
	UNK0883	570	7								
	UNK0898	91	0					91	100%		
	UNK0902	54	2								
	UNK0951	1,910	34					1,910	100%	34	100%
	UNK0953	225	0					225	100%		
	UNK0954	81	0					81	100%		
	UNK0955	6,058	146					6,058	100%	146	100%
	UNK1011	5306	44								
	UNK1020	71	2								
	UNK1040	1414	21								
	UNK1063	49	0								
	UNK1166	1,079	28					1,079	100%	28	100%
	UNK1177	156	3					156	100%	3	100%
	UNK1188	25,926	470					25,926	100%	470	100%
	UNK1189	2,043	17					2,043	100%	17	100%
	UNK1680	719	8								
	UNK1750	1,239	23					1,239	100%	23	100%
Unknown	UNK1767	2,077	52					2,077	100%	52	100%
	UNK1835	761	10					761	100%	10	100%
	UNK1836	1179	22								
	UNK1886	20	0					20	100%		
	UNK1887	20	0					20	100%		
	UNK1888	21	0					21	100%		
	UNK1889	21	0					21	100%		
Unknown TOTAL		54,319	954	0	0%	0	0%	43,007	79%	810	85%
West Meadow Brook	WMB0738	80	0					80	100%		
	WMB0739	80	0					80	100%		
	WMB0740	82	0					82	100%		
	WMB0759	20	0					20	100%		

**Table 2-2 SUMMARY OF IDDE INVESTIGATIONS OF SYSTEMS WITH POTENTIAL ILLICIT CONNECTIONS BY BASIN**  
**(BASED ON OUTFALL INSPECTION PROGRAM)**  
**2014-2024 Dry-Weather MS4/Stormwater Outfall Inspection Program**  
**IDDE INVESTIGATION PRIORITIES**

		Current Report Period						Completed to Date			
		January 2024 - June 2024						Including this Reporting Period			
Basin ID	Outfall ID	Existing System Estimates		Investigated				Complete to Date			
		Length of Pipe (ft)	Number of Manholes and Catch Basins	Length of Pipe (ft)	Percent Completed	Number of Manholes and Catch Basins	Percent Completed	Length of Pipe (ft)	Percent Completed	Number of Manholes and Catch Basins	Percent Completed
West Meadow Brook TOTAL		262	0					262	100%		
GRAND TOTAL		137,927	2,617	0	0%	0	0%	112,255	81%	2,314	88%
		26.12mi.		0.00mi.				21.26mi.			

<sup>1</sup> Estimate Base upon Percentage of Manholes Inspected

<sup>2</sup> Catchment includes State owned drainage and outfall. City inspected City owned drainage.

**Table 2- 3 OUTFALL MAINTENANCE PRIORITY TABLE**  
**January through June 2024**

Outfall ID	Work Order Number	High Priority		Medium Priority	Low Priority						
		Couldn't Locate	Buried	Fully Submerged Sediment	Partially Submerged Sediment	Fully Submerged Water	Partially Submerged Water	Abnormal Vegetation	Outfall Damage	Inspection Date	Re-Inspection Date
LR1150	ST00001282		X							19-Jun	23-Jun
CB1199	ST00000595				X					19-Aug	23-May
CB1200	ST00000596				X					19-Aug	23-May
CB1201	ST00000597				X					19-Aug	23-May
CL0681	ST00000600				X					19-Apr	23-May
DPI0841	ST00000608				X					19-Apr	23-May
DPI0965	ST00000609				X					19-Apr	23-May
MR23515	ST00000652				X					23-May	
MR23520	ST00000657				X					23-May	
MR23522	ST00000659				X					23-Jun	
UNK0626	ST00000674				X					19-Apr	23-May
UNK0756	ST00000691				X					19-Apr	23-May
UNK0962	ST00000709				X					23-May	
UNK1801	ST00000758				X					19-Jul	23-Jun
UNK1806	ST00000760				X					23-May	

**Table 2- 3 OUTFALL MAINTENANCE PRIORITY TABLE**  
**January through June 2024**

Outfall ID	Work Order Number	High Priority		Medium Priority	Low Priority					Inspection Date	Re-Inspection Date
		Couldn't Locate	Buried	Fully Submerged Sediment	Partially Submerged Sediment	Fully Submerged Water	Partially Submerged Water	Abnormal Vegetation	Outfall Damage		
UNK32717	ST00000791				X					19-May	23-May
UNK34712	ST00000793				X					23-May	
UNK34713	ST00000794				X					19-May	23-May
UNK1902	ST00001296							X		19-May	23-May
DPI1131	ST00000619						X			19-May	23-May
DPI1162	ST00000621						X			19-May	23-May
UNK1177	ST00000729						X			19-Jun	23-Jun
UNK1823	ST00000761						X			21-Jul	23-May
LR0979	ST00001304								X	19-Apr	23-Jun
MR1224	21335		X								24-Jun
UNK0905	N/A						X			18-Aug	24-Jun
UNK0997	23004	X	X							18-Aug	24-Jun
UNK1207	23005	X	X							19-Mar	24-Jun
UNK1221	ST00000568		X							18-Aug	
UNK1907	STI0001313		X							18-Aug	

**Table 2- 3 OUTFALL MAINTENANCE PRIORITY TABLE**  
**January through June 2024**

Outfall ID	Work Order Number	High Priority		Medium Priority	Low Priority					Inspection Date	Re-Inspection Date
		Couldn't Locate	Buried	Fully Submerged Sediment	Partially Submerged Sediment	Fully Submerged Water	Partially Submerged Water	Abnormal Vegetation	Outfall Damage		
UNK35912	STI0001314		X							18-Aug	
UNK1773	ST00000575		X							19-Mar	
UNK1774	ST00000576		X							18-Aug	
CB1196	ST00000510			X						19-Mar	
DPI0655	ST00000514			X						19-Mar	
DPI1008	ST00000520			X						19-Apr	
DPO1154	ST00000524			X						19-Mar	
JP1179	ST00000530			X						19-Apr	
LR0844	ST00000083			X						19-Mar	
LR1118	ST00001283			X						19-Mar	
MR1278	ST00000541			X						19-Apr	
MR24329	ST00000544			X						19-Apr	
SB11512	ST00000545			X						18-Aug	
TS0987	ST00000548			X						19-Mar	
UNK0064	ST00000551			X						19-Apr	

**Table 2- 3 OUTFALL MAINTENANCE PRIORITY TABLE**  
**January through June 2024**

Outfall ID	Work Order Number	High Priority		Medium Priority	Low Priority					Inspection Date	Re-Inspection Date
		Couldn't Locate	Buried	Fully Submerged Sediment	Partially Submerged Sediment	Fully Submerged Water	Partially Submerged Water	Abnormal Vegetation	Outfall Damage		
UNK0782	ST00000553			X						19-Mar	
UNK0935	ST00000558			X						19-Mar	
UNK1017	ST00000561			X						19-Mar	
UNK1076	ST00000563			X						19-Mar	
UNK1137	ST00000564			X						19-Mar	
UNK1183	ST00000566			X						19-Mar	
UNK1748	ST00000573			X						19-Mar	
UNK1772	ST00000574			X						19-Mar	
UNK1906	ST00000580			X						19-Mar	
UNK25513	ST00000583			X						19-Mar	
UNK31513	ST00000584			X						19-Mar	
CL0701	ST00000603				X					19-Apr	
DPI0634	ST00000606				X					19-Apr	
DPI1081	ST00000615				X						
DPI1090	ST00000617				X					19-Apr	



**Table 2- 3 OUTFALL MAINTENANCE PRIORITY TABLE**  
**January through June 2024**

Outfall ID	Work Order Number	High Priority		Medium Priority	Low Priority						
		Couldn't Locate	Buried	Fully Submerged Sediment	Partially Submerged Sediment	Fully Submerged Water	Partially Submerged Water	Abnormal Vegetation	Outfall Damage	Inspection Date	Re-Inspection Date
FB7114	ST00000629				X					19-Apr	
LR0931	ST00000635				X					19-Apr	
LR1099	ST00000636				X					19-Apr	
LR1102	ST00000637				X					19-Apr	
MR23513	ST00000650				X					21-Aug	
MR23514	ST00000651				X						
MR23516	ST00000653				X						
MR23517	ST00000654				X						
MR23518	ST00000655				X						
MR23519	ST00000656				X						
MR23523	ST00000660				X						
MR23524	ST00000661				X						
MR23525	ST00000662				X						
MR24316	ST00000663				X					19-Apr	
MR24318	ST00000664				X						

**Table 2- 3 OUTFALL MAINTENANCE PRIORITY TABLE**  
**January through June 2024**

Outfall ID	Work Order Number	High Priority		Medium Priority	Low Priority					Inspection Date	Re-Inspection Date
		Couldn't Locate	Buried	Fully Submerged Sediment	Partially Submerged Sediment	Fully Submerged Water	Partially Submerged Water	Abnormal Vegetation	Outfall Damage		
MR24718	ST00000665				X					19-Apr	
SB1117	ST00000668				X					19-Apr	
UNK0885	ST00000701				X					19-Apr	
UNK0950	ST00000706				X					19-Apr	
UNK1000	ST00000710				X					19-Apr	
UNK1005	ST00000711				X					19-Apr	
UNK1006	ST00000712				X					19-Apr	
UNK1111	ST00000717				X					19-Apr	
UNK1123	ST00000718				X					19-Apr	
UNK1160	ST00000722				X					19-Apr	
UNK1174	ST00000726				X					19-Apr	
UNK1205	ST00000732				X					19-Apr	
UNK1213	ST00000734				X					19-Apr	
UNK1263	ST00000736				X					19-Apr	
UNK1265	ST00000737				X					19-Apr	

**Table 2- 3 OUTFALL MAINTENANCE PRIORITY TABLE**  
**January through June 2024**

Outfall ID	Work Order Number	High Priority		Medium Priority	Low Priority					Inspection Date	Re-Inspection Date
		Couldn't Locate	Buried	Fully Submerged Sediment	Partially Submerged Sediment	Fully Submerged Water	Partially Submerged Water	Abnormal Vegetation	Outfall Damage		
UNK1684	ST00000742				X					19-Apr	
UNK1686	ST00000744				X					19-Jul	
UNK1738	ST00000751				X					21-May	
UNK1802	ST00000759				X					19-Jul	
UNK1867	ST00000770				X						
UNK1891	ST00000773				X					19-Apr	
UNK1899	ST00000775				X					19-Jul	
UNK1900	ST00000776				X					19-Jul	
UNK24721	ST00000780				X					19-Aug	
UNK26725	ST00001286				X					19-May	
UNK26726	ST00000784				X						
CB0977	ST00001288							X			
DPO0657	ST00001291							X		19-May	
FB0715	ST00001293							X			
UNK0906	ST00001294							X			

**Table 2- 3 OUTFALL MAINTENANCE PRIORITY TABLE**  
**January through June 2024**

Outfall ID	Work Order Number	High Priority		Medium Priority	Low Priority					Inspection Date	Re-Inspection Date
		Couldn't Locate	Buried	Fully Submerged Sediment	Partially Submerged Sediment	Fully Submerged Water	Partially Submerged Water	Abnormal Vegetation	Outfall Damage		
DPI0945	ST00000519					X				19-May	
DPI1133	ST00000522					X				19-May	
MR20719	ST00000542					X					
TS0989	ST00000549					X				19-Apr	
KL26714	ST00000533					X					
DPI0970	ST00000610						X				
DPI1007	ST00000614						X				
DPI1084	ST00000616						X				
DPI1125	ST00000618						X				
DPI1197	ST00001299						X				
KL1178	ST00000633						X			19-Apr	
LR1260	ST00000642						X				
TS0984	ST00000670						X			19-Apr	
TS33514	ST00000673						X			19-Apr	
UNK0665	ST00000678						X			19-May	

**Table 2- 3 OUTFALL MAINTENANCE PRIORITY TABLE**  
**January through June 2024**

Outfall ID	Work Order Number	High Priority		Medium Priority	Low Priority					Inspection Date	Re-Inspection Date
		Couldn't Locate	Buried	Fully Submerged Sediment	Partially Submerged Sediment	Fully Submerged Water	Partially Submerged Water	Abnormal Vegetation	Outfall Damage		
UNK0666	ST00000679						X			19-May	
UNK0729	ST00000689						X				
UNK0955	ST00000708						X				
FB1168	ST00000723						X				
UNK1176	ST00000728						X			19-Jul	
UNK1188	ST00001301						X			19-Apr	
UNK1206	ST00000733						X			19-May	
UNK1220	ST00000735						X				
UNK1695	ST00000745						X			19-Apr	
UNK1749	ST00000752						X			19-Apr	
UNK6316	ST00001303						X			19-May	
UNK8312	ST00000797						X				
MR0607	ST00001305								X	19-May	
TS0983	ST00001307								X	19-Apr	
UNK1173	ST00001308								X		

**Table 2- 3 OUTFALL MAINTENANCE PRIORITY TABLE**  
**January through June 2024**

Outfall ID	Work Order Number	High Priority		Medium Priority	Low Priority						
		Couldn't Locate	Buried	Fully Submerged Sediment	Partially Submerged Sediment	Fully Submerged Water	Partially Submerged Water	Abnormal Vegetation	Outfall Damage	Inspection Date	Re-Inspection Date
MR0927	ST00001309										
UNK1189	ST00001310										
Inspection dates in blue indicate an item has been closed											

## **2.4 IDENTIFIED ILLICIT CONNECTIONS AND CURRENT PRIORITY LIST STATUS RESOLUTION**

The ongoing and cumulative status of the City's efforts to remove any identified illicit connections or discharges is summarized in Table 2-4.

Merrimack River Basin Outfalls – MR1164 has been removed from the priority list as it is seasonal groundwater flow from top of catchment.

Little River Basin Outfalls – LR0952 has been removed from the priority list as it is connected to athletic field drainage and is considered an excluded outfall. Upstream investigation showed no flow from catchment not originating from athletic field drainage.

Unknown Basin Outfalls - UNK0951– has been removed from the priority list as it is connected to athletic field drainage and is considered an excluded outfall. UNK1020 was removed from the priority list as sampling results were within acceptable permit limits. UNK1680 was removed from the priority list for no flow.

Pentucket Lake Basin Outfalls – PL0891 was sampled for wet weather flows and sample results are shown on table 2-1.

Detention Pond Inlets Outfalls – DPI0696 was removed from the priority list as it is connected to athletic field drainage and is considered an excluded outfall.



**TABLE 2- 4 SUMMARY OF ILLICIT DISCHARGES IDENTIFIED BY BASIN AND CURRENT STATUS  
(January through July 2024)**

Description		Illicit Discharge/Connection Verified				Ongoing Illicit Discharge Removal Activities					Final Illicit Connection Removal Actions				
Basin ID	Outfall ID	Date Verified	Address Location	Type of Discharge <sup>1</sup>	Estimated Flow	Removed?	Reasons Why Not	Schedule for Removal	Reason why expedited	Legal Actions against Private Property Owners	Actions Taken (with Dates)	Date Connection Eliminated	Est. Cost of Removal	Estimated Volume Removed (gallons)	Assessment: Is the City in compliance with the schedule?
Little River	LR1260	10/26/2017	29 Union Street	Single family broken sewer	400 gpd	not removed	gave extension	Was removed on 2/24/18			Catchment investigation completed on 10/10/2020. City currently conducting sewer separation project			60,000	
Merrimack River	MR1164	11/19/2016	Market Basket Parking Lot	groundwater into drain	Seasonal Flow/ Not able to estimate	N/A	N/A	N/A	N/A	N/A	This dry weather flow appears to be from a groundwater discharge into the drainage system across a parking lot. Additional testing is required to confirm bacteria source is groundwater.	N/A	N/A	N/A	Yes, the City is in compliance with resolving this "illicit discharge".
	MR1109	12/21/2020	350 Water St	IDDE conducted and needs further investigation to determine the source.	500gpd	not removed	verifying bacteria counts				CCTV conducted on 12.21.2020 no defects found. Flow appears to be from top of catchment from depression/wetland flowing through drain. Additional CCTV required in nearby sewer lines to confirm no infiltration				Yes, the City is in compliance
Pentucket Lake	PL0891	10/5/2016	Marsh Avenue	leaking sewer/exfiltration	Not able to estimate	X	Sewer replacement costs/lengths	2021	This connection is being	NOV	10/5/18-10/10/18: SMH-2190-point repair and manhole	Dec-21	\$446,000	-	The Marsh Avenue sewer repair

TABLE 2- 4 SUMMARY OF ILLICIT DISCHARGES IDENTIFIED BY BASIN AND CURRENT STATUS  
(January through July 2024)

Description		Illicit Discharge/Connection Verified				Ongoing Illicit Discharge Removal Activities					Final Illicit Connection Removal Actions				
Basin ID	Outfall ID	Date Verified	Address Location	Type of Discharge <sup>1</sup>	Estimated Flow	Removed?	Reasons Why Not	Schedule for Removal	Reason why expedited	Legal Actions against Private Property Owners	Actions Taken (with Dates)	Date Connection Eliminated	Est. Cost of Removal	Estimated Volume Removed (gallons)	Assessment: Is the City in compliance with the schedule?
							are extensive; cost exceeds discretionary funds; new fund required in next fiscal year to complete project		removed as quickly as possible and dependent on the availability of funds within the fiscal year.		rehabilitation complete.  10/11/18-10/16/18: Installation of CIPP main line liner on Main Street  10/17/18-10/23/18: Installation of CIPP main line liner on Marsh Avenue  10/24/18: Began installing CIPP of sewer laterals. Groundwater is too high causing flooding in homes. Project on hold until mid-end March. Project is complete. 6/9/2020: illicit connection located at lateral from laundromat, owner notified to repair, repaired as of December 2021, follow-up testing to be completed next reporting period				project was bid on and awarded to National Water Main Cleaning Company and contract had to be extended to 6/30/19 due to high groundwater.  Project was completed by the end of June 2019 but after review of CCTV, it was determined that more CCTV needs to be conducted and 1 defect in lining needs to be repaired.

TABLE 2- 4 SUMMARY OF ILLICIT DISCHARGES IDENTIFIED BY BASIN AND CURRENT STATUS  
(January through July 2024)

Description		Illicit Discharge/Connection Verified				Ongoing Illicit Discharge Removal Activities					Final Illicit Connection Removal Actions				
Basin ID	Outfall ID	Date Verified	Address Location	Type of Discharge <sup>1</sup>	Estimated Flow	Removed?	Reasons Why Not	Schedule for Removal	Reason why expedited	Legal Actions against Private Property Owners	Actions Taken (with Dates)	Date Connection Eliminated	Est. Cost of Removal	Estimated Volume Removed (gallons)	Assessment: Is the City in compliance with the schedule?
	UNK0951	11/1/2017	Brook Street	Leaking sewer running through drain	Not able to estimate	not removed	Not able to fix due to weather	As soon as weather permits	-	-	Catchment investigation shows flow originating from upstream athletic field drainage	4/17/2018	\$4,277	-	Yes, the City is in compliance
	UNK0955	10/14/2016	South Main Street	Contaminated private line discharges to City line.	Not able to estimate	not removed	Unable to complete investigation due to weather	As soon as weather permits			Drain manholes will be exposed and CCTV'd when weather permits to identify source of illicit flow. CCTV conducted showing no infiltration from shopping plaza, additional CCTV will continue in upcoming reporting period.				
	UNK1166	6/11/2020	Franzone Drive	Upstream contamination needs additional IDDE	10gpm est	not removed	CCTV to be completed in next reporting period								

TABLE 2- 4 SUMMARY OF ILLICIT DISCHARGES IDENTIFIED BY BASIN AND CURRENT STATUS  
(January through July 2024)

Description		Illicit Discharge/Connection Verified				Ongoing Illicit Discharge Removal Activities					Final Illicit Connection Removal Actions				
Basin ID	Outfall ID	Date Verified	Address Location	Type of Discharge <sup>1</sup>	Estimated Flow	Removed?	Reasons Why Not	Schedule for Removal	Reason why expedited	Legal Actions against Private Property Owners	Actions Taken (with Dates)	Date Connection Eliminated	Est. Cost of Removal	Estimated Volume Removed (gallons)	Assessment: Is the City in compliance with the schedule?
	UNK1188	12/25/2012	34 Columbia Park., 66 Columbia Park., 74 Columbia Park., 80 Columbia Park., 90-92 Columbia Park.	5 Single family	N/A	N/A	N/A	N/A	N/A	N/A	5-house sewer services through a drainpipe that were dripping. Install a PVC sleeve through drain	6/8/2016	\$13,000	26,481	The City is in compliance. 60-day deadline was not applicable until November 2016.
	UNK1767	6/23/2020	Tudor Ct	IDDE conducted. CCTV needs to be completed. High ammonia from private pipe. Dye tested home and their waste goes to sewer.	N/A	not removed	CCTV to be completed in next reporting period								
Detention Pond Outlet	DPO0696	6/12/2015	Pamela Lane	Private drain and outfall DPI0697 that discharge to detention pond and not contaminated.	Not able to estimate	N/A	N/A	N/A	N/A	N/A	No Flow present on multiple inspections in 2020. City will continue to monitor for dry weather flow	N/A	N/A	N/A	Yes, the City is in compliance
Grand Total =													\$463,277	86,481	

## SECTION 3 SSO & BUILDING/PRIVATE PARTY BACKUP EVENTS

### 3.1 SSO ACTIVITY

A chronological list of the sanitary sewer overflows (SSO) and building/private party backup events that occurred during this Reporting Period, are listed in Table 3-1.

Over the Reporting Period, there were a total of one reportable SSO events associated with the City's sewer collection system.

It is important to note that the SSO's associated with the City collection system operations continue to not be a result of pipe capacity deficiencies and the City continues to make significant progress in reducing the number of SSOs that occur in the system, which are attributed to City operations. For this six-month reporting period, the City had one SSOs that were directly attributable to unanticipated City collection system conditions. The EPA reported annual average SSOs in a typical nationwide system is about four SSOs per 100 miles. The City currently has approximately 197 miles of sewer.

Appendix D list the four current basement sewer backups during this reporting period.

**TABLE 3-1.SANITIARY SEWER OVERFLOW**

CITYWORKS WORK ORDER	21081
SSO ID	SSO-24-02
SSO ADDRESS	22 Bartlett Street
START DATE/TIME	6/10/2024 13:05
END DATE/TIME	6/10/2024 13:35
DATE REPORTED EPA/DEP	6/10/2024 17:30
WHO NOTIFIED	Isaiah Lewis
REASON FOR OCCURRENCE	Sewer main block
DATE OF LAST SSO OCCURRENCE	2/26/2015 0:00
SSO EST. VOL.	50
RECEIVING WATERS IF SEWERAGE ENTERED	NONE
METHOD USE TO ESTIMATE VOLUME	Visual
NEAREST CB LOCATION ID	CB-8001
DISTANCE TO NEAREST CB (FT.)	12
NAME OF RECEIVE WATER WHETHER OR NOT THERE WAS A RELEASE	NA
ENTERED CB YES OR NO	YES
MEASURED TAKEN STOP SSO	Flushed sewer main
DECONTAMINATE	YES
MEASURED TAKEN TO PREVENT FUTURE OVERFLOWS	CCTV main
SEWERAGE LOCATION INTO STREAM	NO
SSO OWNERSHIP CITY OR PRIVATE	CITY

## SECTION 4 CONSTRUCTION SITE INSPECTION AND ENFORCEMENT PROGRAM

### 4.1 ENFORCEMENT ACTIVITY

At their June 26, 2018, Haverhill City Council meeting, the Council passed and adopted a Pre and Post Construction Stormwater Management Ordinance (Ch. 219) as required by the Consent Decree and MS4 Stormwater permit. Revisions to this Ordinance have been drafted and are undergoing internal legal review to ensure compliance with the current MS4 requirements.

The City received three applications in 2024 seeking approval under the ordinance. One was withdrawn. The City is currently preparing to issue Permit #SWM-24-1 for the redevelopment of the Consentino Middle School and #SWM-24-3 for the redevelopment of land at 51 Merrimack Street in downtown Haverhill. The City additionally received a request to extend Permit #SWM-21-1 for the development of the Sylvan Hill Crossing subdivision off Forest Street. An extension is being prepared for this project.permitted three projects under this ordinance in 2021. No new projects have been filed in 20243.

Thus far, most projects meeting the one acre and MS4 connection requirements have been exempt under the Ordinance due to their being permitted by the Conservation Commission per Massachusetts Stormwater regulations and Wetlands Protection Act. In addition, the Ordinance has served as a deterrent, as there have been instances where projects have been redesigned to reduce proposed disturbances to less than one acre. The draft ordinance updates maintain an opportunity for exemption from the MS4 Ordinance, but applicants must have first demonstrated full compliance with the new Ordinance during another formal permitting process, i.e., Conservation Commission, Planning Board, or City Council.

The City continues to monitor and enforce the requirements of the ordinance at Sylvan Hill Crossing and Michael Anthony Way (#SWM-23-1).



## SECTION 5 GENERAL STATUS

### 5.1 INTRODUCTION

This section summarizes the actions taken by the City of Haverhill to achieve Consent Decree compliance within the Reporting Period.

For the fifteenth reporting period (July through December 2023) there was one deliverable and/or activities due within that timeframe to achieve compliance. The deliverable/activity is shown in Table 5-1 below.

In June 2021, The City Council passed a Loan Authorization for \$7,037,000, for sewer improvements. This project includes replacing sewer lines in various locations, installing a cured in place lining in a 54-inch sewer main, and rehabbing sewer lines in other various locations. In October of 2022, the City submitted the Locke Street Preliminary Design Report as well as updated Final Long Term Control Plan schedules for the Locke Street and Wastewater Treatment Plant projects.

The City and Wright-Pierce completed the design for Phase 1 Locke Street Sewer separation in October 2023. However, there is an issue with an easement for a stormwater outfall pipe into Little River through MBTA and National Grid properties. EPA and MASSDEP agreed to give the City an extension to acquire these easements. However, Due to a back log with MBTA, the City still has not secured these easements.

The timeline to acquire the easements are shown in Table 5-1

**TABLE 5- 1 MBTA/GREYSTONE TIMELINE**

<b>Date</b>	<b>Task</b>	<b>Company</b>
12/12/22	called/mailed Greystone to get information on process	WP
01/10/23	Borings application submitted w/ check	WP
01/20/23	new check mailed	City
02/02/23	Confirmed check was received	Greystone
03/02/23	Told WP it is a minimum 90 day process & cannot contact MBTA on status	Greystone
03/23/23	asked if could add survey to existing boring application.	WP
03/30/23	told that cannot add survey without restarting clock on borings application	Greystone
~ 4/12/23	submitted survey application	WP
after 4/19/23	check for survey was mailed	City
05/10/23	still said they didn't have survey check	Greystone
05/11/23	WP called Greystone as been > 90 days for boring application. Liam said he will express urgency to the depts	WP
06/02/23	Conditionally accepted boring application	Greystone
07/18/23	some of depts approved survey application	Greystone
08/08/23	MBTA officially approved boring application	Greystone
08/23/23	asked for a meeting w/ Greystone, MBTA, MassDEP, WP	City
08/25/23	mailed additional checks for boring license agreement	City
09/05/23	meeting with all of the parties	All
11/16/23	boring license executed	Greystone
12/11/23	boring Keolis agreement was emailed to Keolis	WP
01/23/24	borings completed	SoilX
02/22/24	Keolis had to cancel flaggers - survey was rescheduled	Keolis
03/06/24	survey work was completed	Doucet
8/6/2024	email recommending application be submitted as review time is 4 - 5 months	Greystone
08/16/24	submitted easement/design application	WP
08/20/24	check was mailed	City
09/24/24	GZA submitted the track monitoring system design & WP is reviewing it	WP
09/30/24	Emailed track monitoring system design and updated drawings to MBTA	WP

Wright-Pierce continues the design for Phase 2 CSO separation by conducting a field survey. We will report on the progress in our next Compliance report.

Wright-Pierce Completed the City’s Water Pollution Abatement Facility’s Rehabilitation and Upgrade Project Evaluation in February of 2023. The City Released an RFQ that meets the requirements of the American Rescue Plan Act (ARPA) and Selected Wright-Pierce. The RFQ includes preliminary design, final design, bidding, and construction. Preliminary design kicked off in June of 2024.

The City has implemented a new Computerized Maintenance Management System (CMMS), Cityworks. The system’s CCTV module was the last piece to be implemented and will be utilized to develop consequence of failure, likelihood of failure, and overall “risk” values through CCTV and will be integrated into the City’s long-term CIP. Cityworks also has reporting capabilities for outfall inspection and investigation, catch basin cleaning and inspection, and any corrective or preventative maintenance associated with sewer and stormwater (lift station checks, cleaning of sewer lines, etc.) Cityworks is also being utilized within the wastewater treatment plant for corrective and preventative maintenance.

**TABLE 5- 2 SUBMISSIONS WITHIN CURRENT REPORTING PERIOD**

Part	Activity	Due Date	Submittal Date
<b>Effective Date of Consent Decree (11/10/2016)</b>			
<b>IX</b>	<b>Compliance Reporting</b>		
	Semi Annual CD Report	4/30/202431/23	4/29/2024

## 5.2 ISSUES OF NONCOMPLIANCE

The City is in compliance with the requirements of this Consent Decree.

## 5.3 LOOKING AHEAD - SIX MONTH FORECAST

The anticipated future deliverable required under the Consent Decree for the next Reporting Period, July through December 2024, is shown in Table 5-2.

**TABLE 5-3 DELIVERABLES DURING THE NEXT REPORTING PERIOD (July to December 2024)**

Part	Activity	Trigger Event	# Days Due	Due Dates
			Post Trigger Event	
Effective Date of Consent Decree		11/10/16		
M	CSO Monitoring			
	Annual CSO Activation Report	12/31/24	90	03/31/25
IX	Compliance Reporting			
	Compliance Report No. 17	12/31/24	120	04/30/25

## SECTION 6 SECONDARY TREATMENT BYPASS

### 6.1 INTRODUCTION

The intent of this section is to summarize the secondary treatment bypass events that occurred at the City of Haverhill's Water Pollution Abatement Facility during the reporting period, January through June 2024.

### 6.2 BYPASS EVENTS

There were three secondary treatment bypass events that occurred during the reporting period, which are listed in Table 6-1. The table provides all information required under the Consent Decree.

**TABLE 6- 1 SECONDARY TREATMENT BYPASS EVENTS**

**SECONDARY TREATMENT BYPASS EVENTS**

Bypass Event	#	2024-01		2024-02		2024-03	
Date of Bypass		1/10/2024		3/10/2024		5/30/2024	
Date of Rainfall		1/10/2024	1/11/2024	3/10/2024	3/11/2024	5/30/2024	5/31/2024
Weather Rainfall	Inches	1.87	0.03	1.20	0.13	1.38	0.00
snow melt	(y/n)	No	No	No	No	No	No
Influent Flow	MGD	55.43	31.77	38.53	21.23	22.50	9.87
Bypass Flow Total	MG	7.66	0.00	6.72	0.00	1.37	0.00
Q, bypass start time		10:45 AM		3:30 AM		12:17 PM	
Plant Flows @ Start	MGD	61		60		55	
Q, bypass stop time		5:40 PM		10:25 AM		2:00 PM	
Plant Flows @ Stop	MGD	51		40		36	
Max Influent		65	39.17	63.93	33.07	58.38	14.39
Influent Septage Received	Gallons	14,000	20,000	0	15,000	32,000	34,000
Influent TSS	mg/L	216	92	108	132	252	
Effluent TSS	mg/L	20.40	9.47	9.80	5.20	13.80	
<u>Aeration Basin #1</u>							
Sludge Volume Index	ml/g	390	229		422	294	270
MLSS Lab	mg/L	820	1,530		1,874	2,892	2,998
Mean Cell Residence Time	Days	2.36	1.90		3.15	2.79	
<u>Aeration Basin #2</u>							
Sludge Volume Index	ml/g	323	224		405	294	260
MLSS Lab	mg/L	650	938		1,334	2,174	2,150
Mean Cell Residence Time	Days	2.27	1.49		2.68	2.25	
<u>Aeration Basin #3</u>							
Sludge Volume Index	ml/g	222	239		442	332	323
MLSS Lab	mg/L	630	1,044		1,268	1,988	1,886
Mean Cell Residence Time	Days	2.26	1.56		2.63	2.11	
Aeration Basins Online	#	3	3	3	3	3	3
<u>Secondary Clarifier #1</u>							
Depth of Blanket	ft	14.0	3.5	10.5	5.5	10.0	2.5
<u>Secondary Clarifier #2</u>							
Depth of Blanket	ft	14.0	3.0	8.5	6.5	15.5	2.0
<u>Secondary Clarifier #3</u>							
Depth of Blanket	ft	10.0	2.5	7.5	4.0	12.5	2.5
Secondary Clarifiers Online	#	3	3	3	3	3	3

**Note:**

Gaps for requested data are due to secondary treatment bypass events occurring on a non-sampling day.

### **6.3 RAINFALL DATA**

The Facility's operating data is captured and recorded by the SCADA/WIMS Systems each day from 12:00 AM until 11:59 PM. The National Oceanic and Atmospheric Administration (NOAA) weather station recording procedures require that precipitation is recorded from 7:00 AM to 6:59 AM, with the data observed on the second day. The date inconsistencies between WPAF and NOAA data result

## **SECTION 7 CMOM CORRECTIVE ACTION PLAN**

### **7.1 INTRODUCTION**

Pursuant to the Consent Decree, the City of Haverhill submitted the Capacity, Management, Operation, and Maintenance Program Assessment Corrective Action Plan (CMOM), dated February 22, 2017, to MassDEP and EPA. In their review letter dated August 3, 2017, MassDEP requested that a summary of the status of CMOM related corrective actions that occurred during the reporting period be included in the Compliance Reports.

### **7.2 CMOM CORRECTIVE ACTIONS**

The CMOM identified twenty-six deficiencies, their recommended corrective actions, and an implementation schedule, which are listed in Table 7-1. Table 7-1 was simplified for readability purposes. Item 10 was duplicated and was deleted in Compliance Report Number 10, thus now equaling twenty-five deficiencies.

Table 7-1 has been updated to show all remaining deficiencies and the City's progress. To view the complete table see the previous year submission located [here](#).

### **7.3 ADDITIONAL CMOM-RELATED ACTIVITIES**

In conjunction with the corrective activities, the City has also performed additional activities as outlined and recommended in the CMOM Program, which includes collection system maintenance and construction activities. The expenses related to collection system maintenance activities for this reporting period are listed in Table 7-2.

**TABLE 7- 1 CMOM DEFICIENCIES COMPLETED**

Action #	Deficiency	Recommended Corrective Action	Implementation Schedule	Status
1	The City does not have a formal long-term plan to mitigate SSO.			This action item has been completed and closed. Please see Compliance Report 12 for final comments.
2	The City does not have a comprehensive system to prioritize investigations, repairs, and rehabilitation.			This action item has been completed and closed. Please see CD12 for final comments.
3	The City does not have updated job descriptions that match technical requirements for a modern collection system utility.			This action item has been completed and closed. Please see CD12 for final comments.
4	Although the City training program includes some key safety training, staff would benefit from a formalized safety and technical training program.			This action item has been completed and closed. Please see CD12 for final comments.
5	Although the City uses MaintStar to track customer complaints, they do not use the database to			This action item has been completed and closed. Please see CD12 for final comments.

Action #	Deficiency	Recommended Corrective Action	Implementation Schedule	Status
	prioritize preventative maintenance.			
6	The City lacks a comprehensive, risk-based approach to maintenance planning.			This action item has been completed and closed. Please see CD12 for final comments.
9	The City should update recordkeeping pertaining to private systems			This action item has been completed and closed. Please see CD12 for final comments.
10	The City does not have a finalized version of their capital improvement plan – which will include pump station upgrades, collection system rehabilitation, and WWTP upgrades			This action item has been completed and closed. Please see CD12 for final comments.
12	The City does not have a standard procedure for maintaining safety training records.			This action item has been completed and closed. Please see CD12 for final comments.
13	The City has a general emergency response plan (ERP). The Division recently completed an ERP for responding to SSOs. The			This action item has been completed and closed. Please see CD12 for final comments.



Action #	Deficiency	Recommended Corrective Action	Implementation Schedule	Status
	Division lacks ERP for other collection system emergencies.			
18	Not all pump stations have communication ability. Lack of communication at pump stations has contributed to SSOs.			This action item has been completed and closed. Please see CD12 for final comments.
19	11 pump stations do not have working backup power, though most of these have connections for a portable generator or are small enough to pump out.			This action item has been completed and closed. Please see CD12 for final comments.
21	The City does not have a dedicated location for offloading and dewatering sewer cleaning. The City does not have an enclosed location for storage of their sewer maintenance vehicles.			This action item has been completed and closed. Please see CD12 for final comments.
25	The City lacks public education materials associated with roof leaders and sump pumps.			This action item has been completed and closed. Please see CD12 for final comments.

## 7.4 REMAINING DEFICIENCIES

### Action Number 7

**Deficiency:** Local limits need to be updated.

**Recommended Corrective Action:**

Perform a local limits study and update the limits table in the ordinance (per Appendix E, Sewer Ordinance Review from CMOM Program Assessment and Corrective Action Plan prepared by Woodard & Curran, February 2017).

**Implementation Schedule:**

Within **one year** after EPA approves the CMOM Action Plan

**Status:**

Local limits evaluation was finalized and submitted to EPA for review on June 23, 2021, and subsequently approved. The City is planning to present an updated SUO to the Council for approval.

### Action Number 8

**Deficiency:**

The City needs to improve implementation and enforcement of their Sewer Use Ordinance (SUO).

**Recommended Corrective Action:**

Improve implementation and enforcement of the SUO. Begin mapping Food Service Establishments in GIS and building database of grease trap inspectional data.

**Implementation Schedule:**

Within **one year** after EPA approves the CMOM Action Plan

**Status:**

Cityworks (CMMS) has been updated to reflect all food service establishments (FSE) and is updated as new Food Service Wastewater Discharge Permits are issued. All FSE's are inspected annually.

In December of 2020 the City completed draft updates to the SUO for FOG inspection implementation and enforcement, as well as an update to the Enforcement Response Plan. The City is planning to present an updated SUO to the Council for approval.

### **Action Number 11**

#### **Deficiency:**

The City has not verified that other air relief valves do not exist. Maintenance of air relief valves has not been performed historically.

#### **Recommended Corrective Action:**

Review record drawings and inspect force main routes to confirm location of air relief valves. If located, enter into GIS and schedule routine maintenance in CMMS.

#### **Implementation Schedule:**

Within **one year** after EPA approves the CMOM Action Plan

#### **Status:**

Ongoing. The City has identified three air release valves for four lift stations including Elliot Street, Lake Street and Fondi Road/Hilldale Lift Station common force main. The City will develop a CityWorks PM schedule following the manufacturer's recommendations. When any other air relief valves are found they will be added to CityWorks PM list.

### **Action Number 14**

#### **Deficiency:**

The City does not have formal emergency response training.

#### **Recommended Corrective Action:**

Implement a program for training and practicing emergency response.

#### **Implementation Schedule:**

Within **one year** after EPA approves the CMOM Action Plan

#### **Status:**

The Wastewater Staff have been trained and additional training will be documented in the City's Access File. For minor emergencies, the staff prepares in advance of a weather event (e.g., setting up bypass pumps at the Marginal Pump Station, verifying that equipment has fuel (gasoline, diesel, or propane), along with procuring rental generators. The need for training is incorporated into these routine preparations.

### **Action Number 15**

**Deficiency:**

The City has a hydraulic model for interceptors and CSOs, but there is no city-wide hydraulic model.

**Recommended Corrective Action:**

Although developing a comprehensive hydraulic model is not a high priority, Woodard & Curran recommends building out the model as required to address capacity issues and plan for new development as the need arises.

**Implementation Schedule:**

As Needed

**Status: Ongoing**

The City's GIS system is updated by City staff on an ongoing basis which will provide a good foundation for a future model.

### **Action Number 16**

**Deficiency:**

The City does not have adequate staff to perform sufficient preventative maintenance on all 36 pump stations.

**Recommended Corrective Action:**

Follow the recommendations of the Wastewater Treatment Plant & Collection System Staffing Analysis (Woodard & Curran, 2017) to assign sufficient resources to keep up with required maintenance.

**Implementation Schedule:**

Within **one year** after EPA approves the CMOM Action Plan

**Status: Complete**

The City developed a job description for a new Collection System MEO/laborer and hired a qualified candidate. The City outsources many tasks. The Mission Systems improve the monitoring of pump stations resulting in reduced staff time for routine inspections (weekly vs. daily) and more time on preventative maintenance. Three stations are inspected daily while the rest are inspected weekly. All stations are also inspected quarterly, which involves a more in depth inspection.

### **Action Number 17**

#### **Deficiency:**

Although there is generally sufficient redundancy of pumps and level controls, some stations require specific upgrades related to redundancy.

#### **Recommended Corrective Action:**

The City will utilize the recommendations of the Pump Station Evaluation (Wright Pierce, 2016) to evaluate future rehabilitation.

#### **Implementation Schedule:**

Ongoing

#### **Status: Ongoing**

The City will be standardizing all their pump stations during upgrades and additional pump stations will be considered for rehabilitation/upgrades as outlined in the Pump Station CIP. The City will utilize remaining life of each station, consequence of failure, and station functions. The City has ranked each station based upon its' function. Ejector Station rank 1; Vacuum Prime rank 2; Flooded Suction rank 3; Submersible rank 4. Mission alarms are currently installed in all thirty-six lift stations. Design of three more stations are Complete. Contract CWSRF-12419 was awarded June 30, 2024. Construction is planned in the fall of 2024.

## **Action Number 20**

### **Deficiency:**

There is currently no schedule for cleaning sewer lines on a system-wide basis.

### **Recommended Corrective Action:**

The City will utilize a 20-year plan to inspect all sewer pipes calculated to have a consequence of failure value  $\geq 3$  (approximately 57% of system).

### **Implementation Schedule:**

Will begin to implement program within six **months** after EPA approves the CMOM Action Plan

### **Status: Ongoing?**

The City has purchased their own vac truck. Sewers are designed to achieve self-cleaning velocities. The City has used the Vac-Truck to clean the City's sewers as necessary. The City has added flushing PM's with more flushing being conducted with 246 sewer mains cleaned. Sewer lines are also cleaned prior to planned CCTV inspections. The City, with its consultant Weston and Sampson developed a five-year CCTV program focusing on high-risk areas.

## **Action Number 22**

### **Deficiency:**

The City does not have a list of assets located on rights-of-way. The City has also not developed an SOP for maintenance of rights-of-way and easements.

### **Recommended Corrective Action:**

Identify off-street assets using GIS. Schedule preventative maintenance for maintaining accessibility in CMMS. Develop SOPs for specific easements as necessary, including contacting property owners to obtain keys, etc.

### **Implementation Schedule:**

Within **two years** after EPA approves the CMOM Action Plan

### **Status: Ongoing**

The City has input easements into GIS as assets. These assets will be populated, and SOPs will be made, as well as the development of a preventative maintenance plan. These easements will be added to our CMMS program and a PM schedule will be created for easement inspections. Easement assets are created and can be used in the City's CMMS. An inspection form has been created to evaluate the level of maintenance needed for the easement.

### **Action Number 23**

**Deficiency:**

There is no systematic program for uncovering manholes that have been paved over.

**Recommended Corrective Action:**

- Identification of paved over manholes as part of routine.
- Add paved-over manholes to GIS.
- Adding work orders to CMMS for raising paved-over manholes.

**Implementation Schedule:**

Within **two years** after EPA approves the CMOM Action Plan

**Status: COMPLETE**

The City's highway department distributes a street paving list to each department. The engineering department investigates those streets and puts a list together of buried manholes. This list is then given to the Highway Department, and they raise the manholes. Paved over manholes are added to GIS on an ongoing basis as they are discovered". A SOP has been developed for identifying, locating, and exposing covered manholes.



## **Action Number 24**

### **Deficiency:**

Although the City has identified areas with high measured inflow, building inspections have not been performed.

### **Recommended Corrective Action:**

The City will perform trial building inspections to a sample of 10% of buildings located in Areas 14 & 23 Infiltration and Inflow Report (CDM Smith, 2011). Sample brochures will be sent out to buildings where inspections are not successfully completed.

### **Implementation Schedule:**

Within **two years** after EPA approves the CMOM Action Plan

### **Status:**

The City is considering this as part of their Phase 3 CSO work. However, recommended corrective action is only practical in separated sewer areas. I/I Brochures are available on the City's Website click [here](#).

## **Action Number 26**

### **Deficiency:**

The City does not have a system-wide manhole inspection program

### **Recommended Corrective Action:**

Perform manhole inspections using NASSCO Level 1 MACP. Prioritize and schedule using the risk-based approach described in Appendices B and F rehabilitation. The City plans to complete manhole inspections while performing pipe inspections.

### **Implementation Schedule:**

Will begin to implement program within **six months** after EPA approves the CMOM Action Plan

### **Status: Complete**

Manhole inspections are ongoing as part of pipe inspections. As the City contracts with engineering firms for CCTV work, their scope will also include manhole inspections. The City has implemented NAASCO MACP sewer inspection standards and requires contractors to be NAASCO certified when performing inspections.

The City will ask CCTV vendors to perform a MACP level 1 when they CCTV a sewer segment. 123 MACP level 1 inspections were done in the first half of 2023. Level 1 inspections consist of a basic visual inspection of various sections of a manhole and a condition of that section ranging from “poor” to “good” or “sound”. A SOP has been developed for performing NAASCO MACP level 1 inspections.

**TABLE 7-2**  
**CMOM-RELATED EXPENSES THAT OCCURRED**  
**DURING REPORTING PERIOD 16 (JANUARY THROUGH JUNE 2024 )**

Account	CD Report No. 15 Totals:	Account Description
Lift Station Operation and Maintenance	\$120,506	Used to fund costs for all maintenance and repair of the wastewater collection system. Haverhill's system includes approximately 200 miles of gravity sewer which includes 8-inch up to 72-inch pipe, 36 pumping stations and 3 siphons under the Merrimack River.
Sewer Assessment & Inspection	\$121,746	Used to fund cleaning, CCTV inspection, and assessment of sewer lines and grit removal
Service Contracts	\$32,079	Used to fund the annual service contracts for various items in the wastewater department.
Wastewater Infrastructure	\$34,489	This account is use for sewer repair miscellaneous items. This is an annual appropriation funded from current year revenues.
Wastewater Capital	\$0	Funds are used for expenditures greater than \$10,000 with a life greater than 3-years. This is an annual appropriation funded from current year revenues.
Storm Water - Capital	\$0	Funds capital expenditures greater than \$10,000 with a life greater than 3-years. Funds are annual appropriations from user rates and fees.
Stormwater Expense	\$152,331	Funds various expenses related to stormwater system operation and maintenance, street sweeping, federal and state permit requirements, and the downtown flood system. There is currently no revenue source for stormwater expenditures.
Sewer Rehab	\$22,468	A capital Funds account uses to repair and replace sewer infrastructure
Primrose Street Phase I Locke Street Sewer Separation Project and sewer replacement	\$ 470,705	Phase I includes sewer mains that have reached the end of their useful life.
Pump Station Upgrade CWSRF-12419	\$1,975,000	Replace Coffin Avenue, Hanover Street and Alvanos Drive Lift Stations
<b>Total Spent During Reporting Period</b>	\$2,929,322	



# APPENDIX A

CMMS GENERATED WORK ORDERS

Inspection    808  
Outfall Maintenance Inspection

Cityworks  
Status: COMPLETE

Priority:                      Location: LR1150                      Inspected By: Huff, Richard

---

<b>Projected Start:</b> 3/19/2024 11:29:59AM	<b>Projected Finish:</b>
<b>Initiated By:</b> Conte, James A	<b>Initiated Date:</b> 3/19/2024 11:29:59AM
<b>Actual Finish:</b> 3/22/2024 11:34:06AM	
<b>Insp. Date:</b> 3/22/2024 11:34:06AM	
<b>Closed By:</b>	<b>Date Closed:</b>
<b>Work Order Id:</b>	
<b>Observation:</b>	
<b>Repairs:</b>	
<b>Recommendation:</b> First inspection June 2019 second inspection June 2023 this is here for tracking purposes this should be closed.	

Inspection 808  
Outfall Maintenance Inspection

Cityworks  
Status: COMPLETE

Priority: Location: LR1150 Inspected By: Huff, Richard

Observations:

Start Date and Time of Inspection: 2024-03-22T04:00:00.000Z  
Inspector Helper: James Conte  
Was Outfall Located: Yes  
Why Was Outfall Not Located:  
Did You Check Immediate Upstream Asset to Determine Direction of Outfall Pipe: Yes  
Why Didn't You Check Immediate Upstream Asset: Is Outfall Completely Buried and Need to be Excavated: No  
Picture of Outfall Before Maintenance: No  
Was Outfall Dug Out with Shovels: No  
Does Outfall Require Additional Maintenance: No  
What Additional Maintenance Needs to be Done: No  
Picture of outfall after maintenance: No  
End Date and Time of Inspection: 2024-03-22T04:00:00.000Z

**Inspection 819**  
**Outfall Maintenance Inspection**

**Cityworks**

**Status: OPEN**

**Priority:**                      **Location:** Corner of River and Margi                      **Inspected By:** Huff, Richard

---

**Projected Start:** 6/24/2024 10:12:14AM

**Projected Finish:**

**Initiated By:** Huff, Richard

**Initiated Date:** 6/24/2024 10:12:14AM

**Actual Finish:**

**Insp. Date:** 6/22/2024 7:30:00AM

**Closed By:**

**Date Closed:**

**Work Order Id:**

**Observation:** Unable to access outfall due to location; fence and heavy vegetation.

**Repairs:**

**Recommendation:**

Inspection 819  
Outfall Maintenance Inspection

Cityworks  
Status: OPEN

Priority:                      Location: Corner of River and Margi                      Inspected By: Huff, Richard

Observations:

Start Date and Time of Inspection: 2024-06-22T18:13:00.000Z

Inspector Helper: None

Was Outfall Located: No

Why Was Outfall Not Located: Fence preventing entry to area and excess vegetation

Did You Check Immediate Upstream Asset to Determine Direction of Outfall Pipe: No

Why Didn't You Check Immediate Upstream Asset: Lack of equipment

Is Outfall Completely Buried and Need to be Excavated: Yes

Picture of Outfall Before Maintenance: No

Was Outfall Dug Out with Shovels: Yes

Require Additional Maintenance: Buried and requires a digout, and clearing of vegetation

Needs to be Done: Picture of outfall after maintenance: No

End Date and Time of Inspection: 2024-06-22T20:00:00.000Z



Inspection 821  
Outfall Maintenance Inspection

Cityworks  
Status: CLOSED

Priority:                      Location: At intersection of Lake st a                      Inspected By: Huff, Richard

<b>Projected Start:</b> 6/21/2024 10:28:00AM		<b>Projected Finish:</b>	
<b>Initiated By:</b> Huff, Richard		<b>Initiated Date:</b> 6/24/2024 10:28:31AM	
<b>Actual Finish:</b> 6/22/2024 8:30:00AM			
<b>Insp. Date:</b> 6/22/2024 8:30:00AM			
<b>Closed By:</b> Huff, Richard		<b>Date Closed:</b> 8/29/2024 11:25:00AM	
<b>Work Order Id:</b>			
<b>Observation:</b> Potentially on private property.			
<b>Repairs:</b>			
<b>Recommendation:</b>			

Priority:                      Location: At intersection of Lake st a                      Inspected By: Huff, Richard

Observations:

Start Date and Time of Inspection: 2024-06-23T14:28:00.000Z  
Inspector Helper: James Conte  
Was Outfall Located: No  
Why Was Outfall Not Located: Potentially buried also on private property.  
Did You Check Immediate Upstream Asset to Determine Direction of Outfall Pipe: No  
Why Didn't You Check Immediate Upstream Asset: lack of equipment  
Is Outfall Completely Buried and Need to be Excavated: Yes  
Picture of Outfall Before Maintenance: No  
Was Outfall Dug Out with Shovels: Yes  
Does Outfall Require Additional Maintenance: Yes  
What Additional Maintenance Needs to be Done: Further exploration to locate.  
Picture of outfall after maintenance: No  
End Date and Time of Inspection: 2024-06-23T16:00:00.000Z

Inspection 823  
Outfall Maintenance Inspection

Cityworks  
Status: OPEN

Priority:                      Location: On the corner of Lucy way                      Inspected By: Huff, Richard

Projected Start: 6/22/2024 8:54:00AM                      Projected Finish:  
Initiated By: Huff, Richard                      Initiated Date: 6/24/2024 10:54:46AM  
Actual Finish: 6/22/2024 9:30:00AM  
Insp. Date: 6/22/2024 9:30:00AM  
Closed By:                      Date Closed:  
Work Order Id:

Observation: Potentially buried by a new construction project that looks to have laid out soil on Lucy Way for their heavy machinery. The corner where the Outfall was located had a lot of new soil.

Repairs:

Recommendation:

# Inspection 823

## Outfall Maintenance Inspection

Cityworks

Status: OPEN

Priority: Location: On the corner of Lucy way Inspected By: Huff, Richard

### Observations:

Start Date and Time of Inspection: 2024-06-22T18:57:00.000Z

Inspector Helper:

Was Outfall Located: No

Why Was Outfall Not Located: Potentially buried by soil laid on the road and side of the road by new construction

Did You Check Immediate Upstream Asset to Determine Direction of Outfall Pipe: No

Why Didn't You Check Immediate Upstream Asset: Lack of equipment

Is Outfall Completely Buried and Need to be Excavated: Yes

Picture of Outfall Before Maintenance: No

Was Outfall Dug Out with Shovels: No

Does Outfall Require Additional Maintenance: Yes

What Additional Maintenance Needs to be Done: Further Dig out and exploration to locate

Picture of outfall after maintenance: No

End Date and Time of Inspection: 2024-06-22T20:00:00.000Z

Inspection 825  
Outfall Maintenance Inspection

Cityworks  
Status: COMPLETE

Priority:                      Location:                      Inspected By: Huff, Richard

Projected Start: 6/28/2024 8:57:00AM

Initiated By: Huff, Richard

Actual Finish: 6/28/2024 9:02:09AM

Insp. Date: 6/28/2024 9:02:09AM

Closed By:

Work Order Id:

Observation: Partially submerged, no additional emergency maintenance needed

Repairs:

Recommendation:

Projected Finish:

Initiated Date: 6/28/2024 8:57:00AM

Date Closed:

Priority: Location: Inspected By: Huff, Richard

Observations:

Start Date and  
Time of  
Inspection:  
Inspector Helper: James Conte  
Was Outfall Yes  
Located:  
Why Was Outfall  
Not Located:  
Did You Check No  
Immediate  
Upstream Asset to  
Determine  
Direction of Outfall  
Pipe:  
Why Didn't You No equipment  
Check Immediate  
Upstream Asset:  
Is Outfall No  
Completely Buried  
and Need to be  
Excavated:  
Picture of Outfall Yes  
Before  
Maintenance:  
Was Outfall Dug No  
Out with Shovels:  
Does Outfall No  
Require Additional  
Maintenance:  
What Additional  
Maintenance  
Needs to be Done:  
Picture of outfall No  
after maintenance:  
End Date and Time 2024-06-28T04:00:00.000Z  
of Inspection:

Inspection 826  
Outfall Maintenance Inspection

Cityworks  
Status: COMPLETE

Priority:                      Location:                      Inspected By: Huff, Richard

.....

<b>Projected Start:</b> 6/28/2024 9:18:00AM	<b>Projected Finish:</b>
<b>Initiated By:</b> Huff, Richard	<b>Initiated Date:</b> 6/28/2024 9:18:00AM
<b>Actual Finish:</b> 6/28/2024 9:22:25AM	
<b>Insp. Date:</b> 6/28/2024 9:22:25AM	
<b>Closed By:</b>	<b>Date Closed:</b>
<b>Work Order Id:</b>	
<b>Observation:</b> Overgrown and potentially buried, unable to locate	
<b>Repairs:</b>	
<b>Recommendation:</b> Requires camera work	

Priority:                      Location:                      Inspected By: Huff, Richard

Observations:

Start Date and  
Time of  
Inspection:  
Inspector Helper: James Conte  
Was Outfall Located: No  
Why Was Outfall  
Not Located:  
Did You Check Immediate: No  
Upstream Asset to  
Determine  
Direction of Outfall  
Pipe:  
Why Didn't You Check Immediate: Lack of equipment  
Upstream Asset:  
Is Outfall Completely Buried and Need to be  
Excavated: Yes  
Picture of Outfall Before: No  
Maintenance:  
Was Outfall Dug Out with Shovels: No  
Does Outfall Require Additional  
Maintenance: Yes  
What Additional Maintenance: Dig out, camera work  
Needs to be Done:  
Picture of outfall after maintenance: No  
End Date and Time of Inspection: 2024-06-28T08:00:00.000Z



Inspection 827  
Outfall Maintenance Inspection

Cityworks  
Status: COMPLETE

Priority:                      Location:                      Inspected By: Huff, Richard

Projected Start: 6/28/2024 9:35:00AM

Initiated By: Huff, Richard

Actual Finish: 6/28/2024 9:42:11AM

Insp. Date: 6/28/2024 9:42:11AM

Closed By:

Work Order Id:

Observation:

Repairs:

Recommendation:

Projected Finish:

Initiated Date: 6/28/2024 9:35:00AM

Date Closed:

Priority: Location: Inspected By: Huff, Richard

Observations:

Start Date and Time of Inspection:  
Inspector Helper: James Conte  
Was Outfall Located: No  
Why Was Outfall Not Located: Unable to locate due to excess foliage, potentially buried  
Did You Check Immediate Upstream Asset to Determine Direction of Outfall Pipe: No  
Why Didn't You Check Immediate Upstream Asset: Lack of equipment  
Is Outfall Completely Buried and Need to be Excavated: Yes  
Picture of Outfall Before Maintenance: No  
Was Outfall Dug Out with Shovels: No  
Does Outfall Require Additional Maintenance: Yes  
What Additional Maintenance Needs to be Done: Dig out/camera work  
Picture of outfall after maintenance: No  
End Date and Time of Inspection: 2024-06-28T08:00:00.000Z

Inspection 828  
Outfall Maintenance Inspection

Cityworks  
Status: COMPLETE

Priority: Location: Inspected By: Huff, Richard

Projected Start: 7/19/2024 9:45:00AM  
Initiated By: Huff, Richard  
Actual Finish: 7/19/2024 9:46:44AM  
Insp. Date: 7/19/2024 9:46:44AM  
Closed By:  
Work Order Id:  
Observation:  
Repairs:  
Recommendation:

Projected Finish:  
Initiated Date: 7/19/2024 9:45:00AM  
  
Date Closed:

Priority:                      Location:                      Inspected By: Huff, Richard

Observations:

Start Date and Time of Inspection: 2024-07-19T04:00:00.000Z  
Inspector Helper: James Conte  
Was Outfall Located: Yes  
Why Was Outfall Not Located:  
Did You Check Immediate: No  
Upstream Asset to Determine Direction of Outfall Pipe:  
Why Didn't You Check Immediate: Lack of equipment  
Upstream Asset: Is Outfall Completely Buried and Need to be Excavated: No  
Picture of Outfall Before Maintenance: No  
Was Outfall Dug Out with Shovels: Yes  
Does Outfall Require Additional Maintenance:  
What Additional Maintenance Needs to be Done: Light excavation and brush clearing  
Picture of outfall after maintenance: No  
End Date and Time of Inspection: 2024-07-19T04:00:00.000Z

Inspection 831  
Outfall Maintenance Inspection

Cityworks  
Status: COMPLETE

Priority: Location: Inspected By: Huff, Richard

Projected Start: 7/19/2024 10:13:00AM  
Initiated By: Huff, Richard  
Actual Finish: 7/19/2024 10:19:01AM  
Insp. Date: 7/19/2024 10:19:01AM  
Closed By:  
Work Order Id:  
Observation:  
Repairs:  
Recommendation:

Projected Finish:  
Initiated Date: 7/19/2024 10:13:00AM  
Date Closed:

Priority:                      Location:                      Inspected By: Huff, Richard

Observations:

Start Date and Time of Inspection: 2024-07-19T04:00:00.000Z  
Inspector Helper: James Conte  
Was Outfall Located: Yes  
Why Was Outfall Not Located:  
Did You Check Immediate: No  
Upstream Asset to Determine Direction of Outfall Pipe:  
Why Didn't You Check Immediate: Lack of equipment  
Upstream Asset: Is Outfall Completely Buried and Need to be Excavated: No  
Picture of Outfall Before: Yes  
Maintenance: Was Outfall Dug Out with Shovels: No  
Does Outfall Require Additional Maintenance: No  
What Additional Maintenance Needs to be Done: Nothing  
Picture of outfall after maintenance: No  
End Date and Time of Inspection: 2024-07-19T04:00:00.000Z

Inspection 834  
Outfall Maintenance Inspection

Cityworks  
Status: COMPLETE

Priority:                      Location:                      Inspected By: Huff, Richard

Projected Start: 7/19/2024 10:22:00AM

Initiated By: Huff, Richard

Actual Finish: 7/19/2024 10:24:34AM

Insp. Date: 7/19/2024 10:24:34AM

Closed By:

Work Order Id:

Observation:

Repairs:

Recommendation:

Projected Finish:

Initiated Date: 7/19/2024 10:22:00AM

Date Closed:

Priority: Location: Inspected By: Huff, Richard

Observations:

Start Date and Time of Inspection: 2024-07-19T04:00:00.000Z  
Inspector Helper: James Conte  
Was Outfall Located: Yes  
Why Was Outfall Not Located:  
Did You Check Immediate: No  
Upstream Asset to Determine Direction of Outfall Pipe:  
Why Didn't You Check Immediate: Lack of equipment  
Upstream Asset: Is Outfall Completely Buried and Need to be Excavated: No  
Picture of Outfall Before Maintenance: Yes  
Was Outfall Dug Out with Shovels: No  
Does Outfall Require Additional Maintenance: No  
What Additional Maintenance Needs to be Done: None  
Picture of outfall after maintenance: No  
End Date and Time of Inspection: 2024-07-19T04:00:00.000Z





# APPENDIX B

IDDE Program Supporting Documents



# APPENDIX C

BYPASS SUPPORTING DOCUMENTS

# HAVERHILL, MA - WWTP - DAILY LOG

Date: 01/10/24

	SENIOR OPERATOR:	Primary Operator:	Centrifuge	Secondary Operator
1st	KR/WA	Walter Alce	Brett Robart	JM
2nd	Mark Brasier	Mark Brasier	B R	Silas Roberts
3rd	Schena/Alce	Walter Alce	Justin Mazzotta	JS

WEATHER:	Snowmelt	Yes
Hi: 48	Lo: 12	Ob:
Rain: 1.87	Snow:	
Conditions:	4.0	snowco

## LAB

INFLUENT	Q,Daily Total	MAX	MIN
	55.43	65.00	33.28
Q,byp	start/stop times am or pm & Q 10:45 AM 5:40 PM		
Q,byp Status	activated		
Q,bypa	7.78	Q to 2nd	47.65

## PLANT (\*1600) POWER

	KVA (06)	KW (06)	Centrifuge:
End 1st			1618
End 2nd			7248
End 3rd			5762
			6082
			17951

## COLLECTOR SPEED

#1	#2	#3
1st slow	slow	slow
2nd slow	slow	slow
3rd slow	slow	slow
PSTs on-line	3	

## Gravity Thickeners DOB:

	#1	#2	#1	#2
1st	2.0	1	n/a	n/a
2nd	2	1	-	/
3rd	1.0	0.5	n/a	n/a

## CI2 vol Tank #1 Tank #2 TWAS LEVELS:

	Tank #1	Tank #2		#1	#2	#3
1st	3345		1st	10	8	7
2nd	3146		2nd	13	10	10
3rd	2977		3rd	13	12	11
Total	519	Gallons				

## Dosage Setpoint

Effluent CI2, mg/l	1.45	Inplant	/ /
			/ /

## CHEMICALS:

Sodium Hypo	8	Polymer dry	89	Polymer liq.	1045
		Hydroxide	drums	Alpha Lox 15	drums

## SECONDARY SCUM:

#1	#2	#1	#2	#1	#2
3.1	7.1	4.9	5.69	5.6	3.0
RAS#	SC#	RAS#	SC#	RAS#	SC#
3.39		3.09		3.39	
					0.00

## SECONDARY CLARIFIERS

Depth of Blankets	Daily average	
#1	#2	#3
13.29	0.0	2.9

## PRIMARY SCUM LEVEL: SCREENINGS CARTS:

	Old	New	Plant	Pump Station	Grit qty
1st	2.51	3.35	1/2		0
2nd	2.69	3.369	2	3/4	
3rd	5.03	3.42	2	4	

## 12 Mid PUMP STATION (\*450) POWER

12 Mid	Start 1st	KW(06)	KVA(06)
12 Mid	Start 2nd	KW(06)	KVA(06)
12 Mid	Start 3rd	KW(06)	KVA(06)

## AERATION: Dissolved Oxygen

ATs	on-line	
#1	AT#1 infl do avg	2.0
#3	AT#1 effl do avg	8.1
#4	AT#2 infl do avg	8.8
#6	AT#2 effl do avg	8.5

## Weekly Septage Pumped

## SEPTAGE LEVEL

1st	5.09	ft
2nd		ft
3rd		ft


	CI2	Time	Q(MGD)
TRC 1	0.27	11:43 pm	44.86
TRC 2	0.53	8:21 am	58.60
TRC 3	0.46	6:52 pm	48.82

## CHLORINE RESIDUAL:

0.42	mg/l
	1045

	#1	#2	#3
1st	4.0	10.0	3.0
2nd	14.0	4.0	14.0
3rd	3.0	4.5	5.0

# Capacity of Secondary System at 3ATs 3SSTs

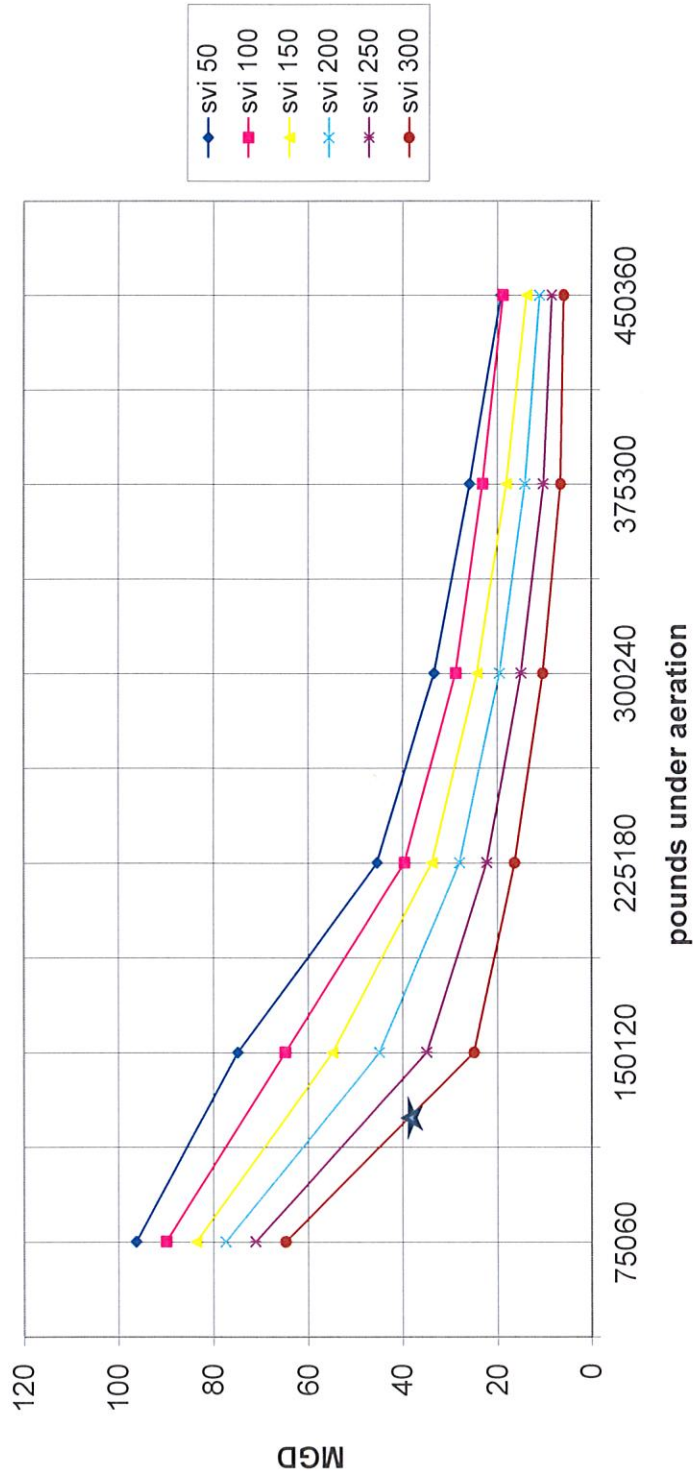

date: 1/10/2024  
 bypass start time: 10:45 AM  
 bypass stop time: 5:40 PM  
 Flow, MG 61  
 SVI >300  
 MLSS 2010  
 LBS 115,000  
 Sr Oper MB  
 setting selected, MG 35  
 JS



PLANT INFLUENT FLOW

CITY OF HAVERHILL, MA - WWTF

LOGIN

INF. FLOW

8.61 MGD

CSO OVERVIEW


ALARMS

10/21/2024

HISTORY MENU

MAIN MENU

7:51:02 AM

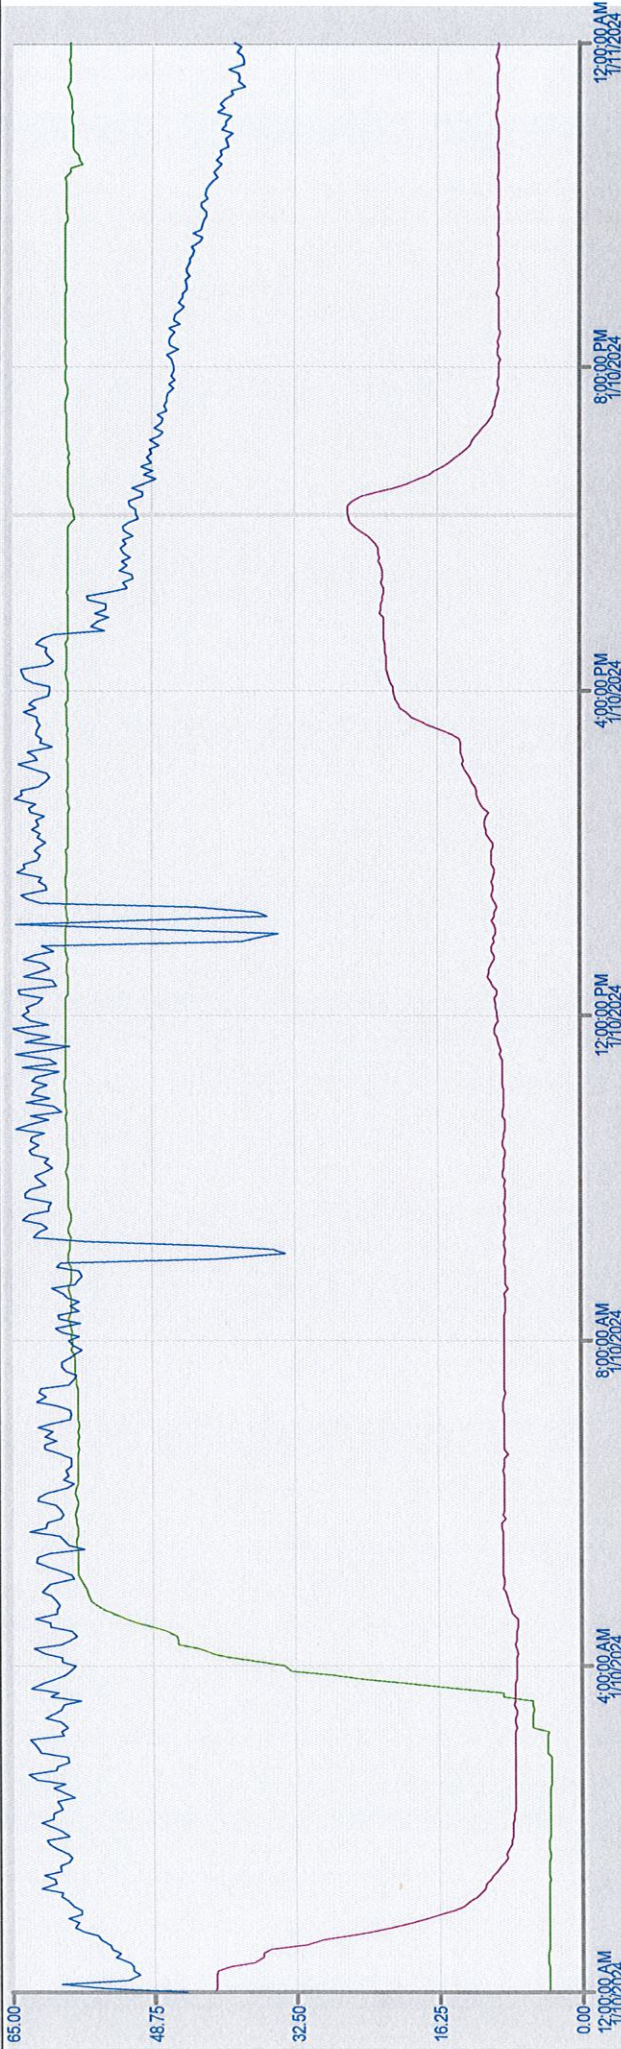

INFLUENT FLOW (F_CV)	50.54	33.72	55.56	MGD	WWTP_WW_SCADA.INFLUENT_FLOW.F_CV
SECONDARY CLARIFIER 1 SLUDGE BLANKET (F_CV)	14.26	0.85	12.10	FEET	WWTP_WW_SCADA_SEC_CLAR_1_SLUDGE_BLANKET.F_CV
SECONDARY CLARIFIER 2 SLUDGE BLANKET (F_CV)	0.00	0.00	0.00	FEET	WWTP_WW_SCADA_SEC_CLAR_2_SLUDGE_BLANKET.F_CV
SECONDARY CLARIFIER 3 SLUDGE BLANKET (F_CV)	6.53	1.78	2.96	FEET	WWTP_WW_SCADA_SEC_CLAR_3_SLUDGE_BLANKET.F_CV

Set to Current Time

Set Starting Time

15 MIN1 HR4 HR8 HR1 DAY1 WEEK1 MONTH3 MONTHS1 YEAR

ACK	TIME IN	DATE IN	DESCRIPTION	VALUE	STATUS
	07:25:51.806	10/21/2024	DAF 1 LOW AIR PRESSURE	NORMAL	CFN
	20:56:06.382	10/20/2024	AERATION TRAIN 2 INFLUENT DO HIGH	NORMAL	CFN
✓	19:54:43.971	10/20/2024	LOWER SIPHON DRY GATE POS DEVIATION	OS DEVIATION	CFN
✓	10:20:10.859	10/20/2024	BLENDED SLUDGE TANK HIGH LEVEL	ALARM	CFN
✓	15:23:44.524	10/19/2024	PRIMARY SYSTEM COMMON ALARM	ON	CFN
✓	15:39:25.271	10/17/2024	SOD. HYPO TANK 2 LOW ALARM	LOW	CFN

Total Alarms: 23Sort Time in: DescendingFilter: OffShelved: FalseRun



BYPASS MULTI TREND

CITY OF HAVERHILL, MA - WWTF

LOGIN

INF. FLOW

8.85 MGD

CSO OVERVIEW


ALARMS

10/21/2024

HISTORY MENU

MAIN MENU

7:52:30 AM

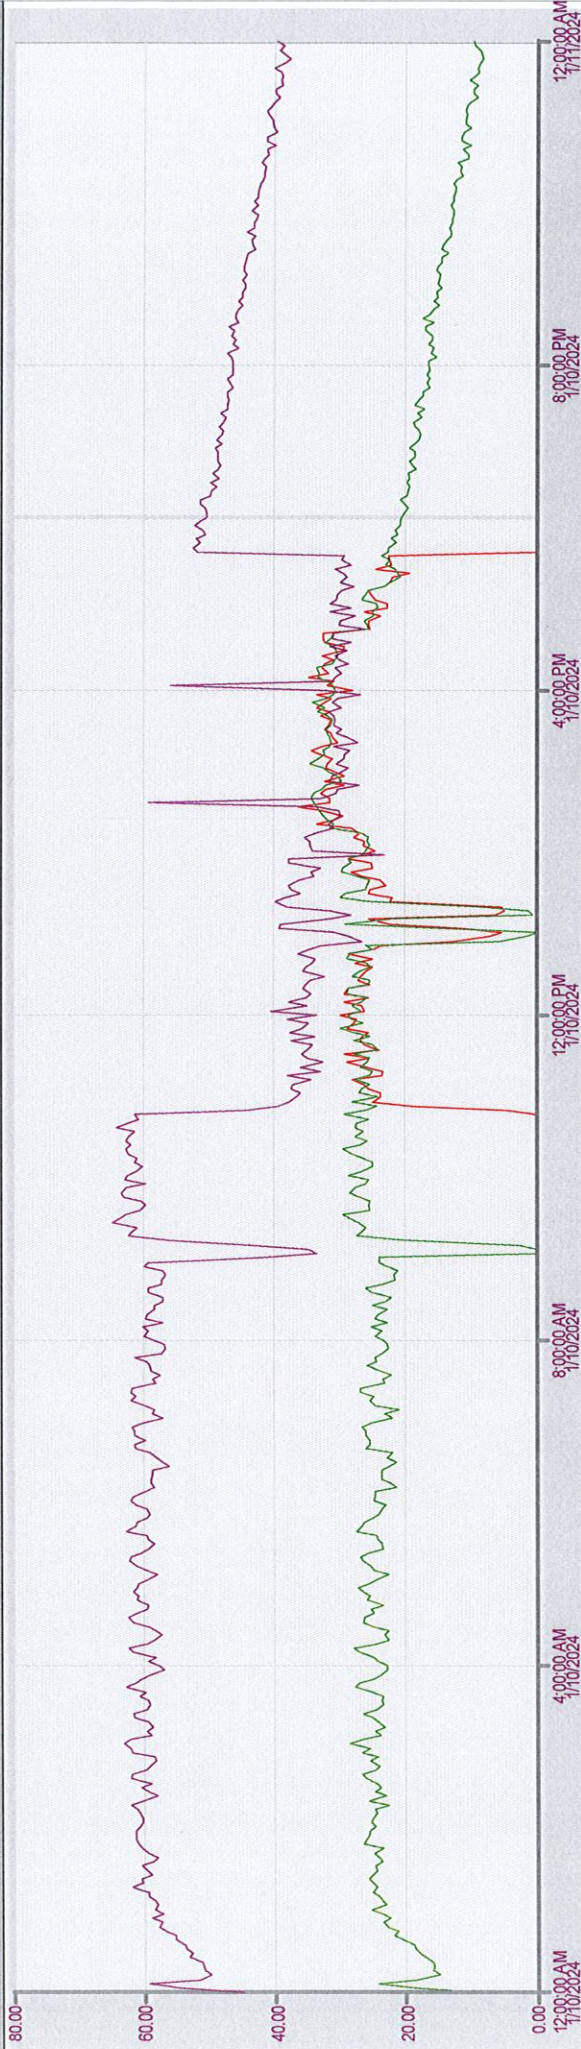

SECONDARY FLOW RATE (F\_CV)  
BYPASS FLOW (F\_CV)  
BYPASS FLOW AUTO SP (F\_CV)  
BYPASS CHLORINE (F\_CV)

VALUE	MAX	MIN	AVG	UNITS	TAG
50.76	23.32	48.02	MGD	WWTP.WW_SCADA_SECONDARY_FLOW_RATE_F_CV	
0.00	0.00	7.65	MGD	WWTP.WW_SCADA_BYPASS_FLOW_F_CV	
20.64	-1.34	22.62	MGD	WWTP.WW_SCADA_BYPASS_FLOW_AUTO_SP_F_CV	
0.00	0.00	0.00	PPM	WWTP.WW_SCADA_BYPASS_CHLORINE_F_CV	

DESCRIPTION

Set to Current Time

Set Starting Time

15 MIN

1 HR

4 HR

8 HR

1 DAY

1 WEEK

1 MONTH

3 MONTHS

1 YEAR

Ack	Time In	Date In	Description	Value	Status
	07:25:51.806	10/21/2024	DAF 1 LOW AIR PRESSURE	NORMAL	CFN
	20:56:06.382	10/20/2024	AERATION TRAIN 2 INFLUENT DO HIGH	NORMAL	CFN
✓	19:54:43.971	10/20/2024	LOWER SIPHON DRY GATE POS DEVIATION	OS DEVIATION	CFN
✓	10:20:10.859	10/20/2024	BLENDED SLUDGE TANK HIGH LEVEL	ALARM	CFN
✓	15:23:44.524	10/19/2024	PRIMARY SYSTEM COMMON ALARM	ON	CFN
✓	15:39:25.271	10/17/2024	SOD. HYPO TANK 2 LOW ALARM	LOW	CFN
✓	10:00:00.000	10/10/2024	DAF 1 LOW AIR PRESSURE	ON	CFN

Total Alarms: 23

Filter: Off

Sort: Time In, Descending

Shelved: False

Run



Septage Snow

	Q, tot	Recd	Rainfall	Melt	Q, byp	sec	Actual	Graph	Setpt	TRC	mg/l	'100m	MLSS	MLSS	AT #2	MLSS	AT #3	Sec Eff	SVI	SVI	AT #2	SVI	AT #3	ec lbs	asec lbs	at	# of AT	# of SST
	MGD	GPD	ins.	yes/no	MGD	MGD	Byp set,	MG Byp set,	MG	activated		AT #1	AT #2	AT #3	OD, mgSS,	mgAT #1	AT #2	AT #3	AT #2	AT #3	AT #2	AT #3	DB methos	formul	on line	on line		
01/01/24	13.46	0			0.00	13.46	40.0		0.36	<1	2,118	1,478	1,600	11.06	4.80	340	311	300	104,063	65,002					3	3		
01/02/24	13.44	16,500			0.00	13.44	40.0		0.37	2	2,236	1,570	1,658	10.04	6.00	344	325	368	102,725	68,355					3	3		
01/03/24	13.29	0			0.00	13.29	40.0		0.36	1	2,306	1,524	1,750	12.01	5.60	338	315	360	105,771	69,806					3	3		
01/04/24	13.09	25,500			0.00	13.09	40.0		0.34	2	2,176	1,578	1,734	12.98	6.60	335	336	363	102,315	68,655					3	3		
01/05/24	12.75	32,000			0.00	12.75	35.0		0.26	2	2,146	1,538	1,598			363	384	419	94,240	66,078					3	3		
01/06/24	12.24	3,000			0.00	12.24	35.0		0.30																3	3		
01/07/24	11.86	0	0.71		0.00	11.86	35.0		0.30					10.67	5.20										3	3		
01/08/24	11.96	18,000	0.76	Yes	0.00	11.96	35.0		0.32	1	2,542	1,744	1,744	9.87	5.40	346	396	453	104,522	75,435					3	3		
01/09/24	13.67	26,500			0.00	13.67	35.0		0.34	2	2,478	1,696	1,856	11.02	3.40	339	371	388	114,939	75,435					3	3		
01/10/24	55.43	14,000	1.87	Yes	7.66	47.65	35.0		0.42	175	820	650	630	15.21	20.40	390	323	222	158,677	26,271					3	3		
01/11/24	31.77	20,000	0.03	Yes	0.00	31.77	30.0		0.39	231	1,530	938	1,044	10.27	9.47	229	224	239	89,040	43,935					3	3		
01/12/24	24.88	23,500		Yes	0.00	24.88	30.0		0.30	196	1,798	1,186	1,322			334	236	234	83,932	53,868					3	3		
01/13/24	47.48	22,500	0.32	Yes	0.00	47.48	30.0		0.36																3	3		
01/14/24	29.30	0	0.85		0.00	29.30	30.0		0.35					8.06	6.60										3	3		
01/15/24	23.85	9,000	0.03		0.00	23.85	30.0		0.33	45	2,406	1,464	1,542	6.98	5.20	262	253	279	120,088	67,704					3	3		
01/16/24	21.56	15,500	0.03	Yes	0.00	21.56	30.0		0.33	7	2,766	1,602	1,784	8.30	5.00	239	312	342	154,774	76,962					3	3		
01/17/24	19.13	27,000	0.33	Yes	0.00	19.13	30.0		0.31	37	2,560	1,756	1,906	9.62	5.40	293	290	352	152,644	77,837					3	3		
01/18/24	17.86	14,500			0.00	17.86	30.0		0.33	29	2,668	1,726	1,934	9.46	5.60	311	307	367	165,903	79,163					3	3		
01/19/24	16.96	49,500		Yes	0.00	16.96	30.0		0.32	1	2,748	1,930	2,044			291	311	323	160,812	84,092					3	3		
01/20/24	15.47	13,000		Yes	0.00	15.47	30.0		0.36																3	3		
01/21/24	14.60	0		Yes	0.00	14.60	30.0		0.35					13.80	4.40										3	3		
01/22/24	14.27	22,500			0.00	14.27	30.0		0.19	139	2,780	2,034	2,086	16.13	4.20	313	403	417	128,875	86,319					3	3		
01/23/24	14.27	13,000		Yes	0.00	14.27	30.0		0.35	<1	2,908	2,038	2,062	15.98	5.60	292	368	388	134,121	87,670					3	3		
01/24/24	15.41	21,500	0.07	Yes	0.00	15.41	30.0		0.41	<1	2,894	2,074	2,046	16.00	4.40	304	357	396	128,039	87,745					3	3		
01/25/24	19.23	22,750	0.56		0.00	19.23	30.0		0.42	1	2,450	1,654	1,680	15.45	5.80	318	357	357	151,156	72,358					3	3		
01/26/24	26.32	32,750	0.04		0.00	26.32	30.0		0.33	<1	2,028	1,660	1,610			335	319	335	176,579	66,278					3	3		
01/27/24	19.13	5,000	0.65	Yes	0.00	19.13	30.0		0.32																3	3		
01/28/24	20.71	0	0.02	Yes	0.00	20.71	30.0		0.35					8.62	6.60										3	3		
01/29/24	21.10	4,000	0.62	Yes	0.00	21.10	30.0		0.34	4	2,668	1,682	1,684	7.55	6.60	255	297	315	156,220	75,485					3	3		
01/30/24	18.50	38,500		Yes	0.00	18.50	30.0		0.29	2	2,716	1,898	1,944	7.10	5.80	317	332	355	171,130	82,041					3	3		
01/31/24	17.61	24,250		Yes	0.00	17.61	30.0		0.34	<1	2,678	1,984	2,060	8.31	5.00	317	323	320	166,004	84,092					3	3		
Average	20.02								0.34	5	2,366	1,626	1,709	11.06	6.22	313	324	343	131,590	71,330								

rainfall amounts are for a 24 hour period ending at 7am of the day that the amount is recorded comment added on 5-13-14 by fgh



# HAVERHILL, MA - WWTP - DAILY LOG

Date: 03/10/24

SENIOR  
OPERATOR:

Primary  
Operator:

Centrifuge

Secondary  
Operator

1st Mark Brasier

2nd Walter Alce

3rd Alce/Brasier

WEATHER:

Hi: 44

Snowmelt

Lo: 29

Ob:

Rain: 1.20

Snow:

Conditions: Rain

snowco

LAB Ken Jones

PRIMARY SCUM LEVEL: SCREENINGS CARTS:

INFLUE	Q,Daily Total	MAX	MIN	Old	New	Plant	Pump Station	Grit qty
	38.53	63.93	21.27	1st	1.69	10.69	5	0
Q,byp	start/stop times am or pm & Q 3:30-10:25 AM			2nd	1.85	10.22	5	3
Q,byp Status	activated			3rd	1.85	10.22	5	3
Q,bypa	6.74	Q to 2nd	31.79					

PLANT (\*1600) POWER

End 1st	KVA (06)	KW (06)	Centrifuge:	48
End 2nd	KVA (06)	KW (06)	Primary:	4234
End 3rd	KVA (06)	KW (06)	Secondary:	2571
			Aeration:	6451
			Total:	12150

COLLECTOR SPEED

#1	#2	#3
1st	slow	slow
2nd	slow	slow
3rd	slow	slow
PSTs on-line	3	

Gravity Thickeners DOB:

Torque:

#1	#2	#1	#2
1st	0.0	3	HIGH Torque
2nd	0	4	off
3rd	0	4	off

12 Mid PUMP STATION (\*450) POWER

12 Mid	Start 1st	KW(06)	KVA(0
12 Mid	Start 2nd	KW(06)	KVA(0
12 Mid	Start 3rd	KW(06)	KVA(0

AERATION: Dissolved Oxygen

ATs on-line 3

#1 AT#1 infl do avg

#3 AT#1 effl do avg

#4 AT#2 infl do avg

#6 AT#2 effl do avg

Weekly Septage Pumped 2 Gals

SEPTAGE LEVEL

1st	5.08	ft
2nd		ft
3rd		ft

CI2 vol Tank #1 Tank #2 TWAS LEVELS:

1st	2nd	3rd	#1	#2	#3	CI2	Time	Q(MGD)
1st	2148		14	full	F	TRC 1	0.29	6:09 pm
2nd	2086		14	14	14	TRC 2	0.48	7:40 am
3rd	2021		11	11	11	TRC 3	0.27	2:15 PM
Total	237	Gallons	3rd					

Dosage Setpoint

Effluent CI2, mg/l

2.35

Inplant

CHLORINE RESIDUAL:

0.35

mg/l

CHEMICALS:

Sodium Hypo 8

Polymer dry 165

Polymer 845

Hydroxide drums

Alpha Lox 15 drums

SECONDARY SCUM:

#1	#2	#1	#2	#1	#2
6.9	7.9	7.7	7.8	7.2	7.6
RAS#	7.9	RAS#	SC#	RAS#	SC#
3.41		0.00		3.41	2.39

SECONDARY CLARIFIERS

SSTs on-line 3

Depth of Blankets Daily average


#1	#2	#3
2.13	0.0	2.4

DOB by Operators

#1	#2	#3
1st	5.0	10.5
2nd	7.5	7.0
3rd	7.0	6.0



# Capacity of Secondary System at 3ATs 3SSTs

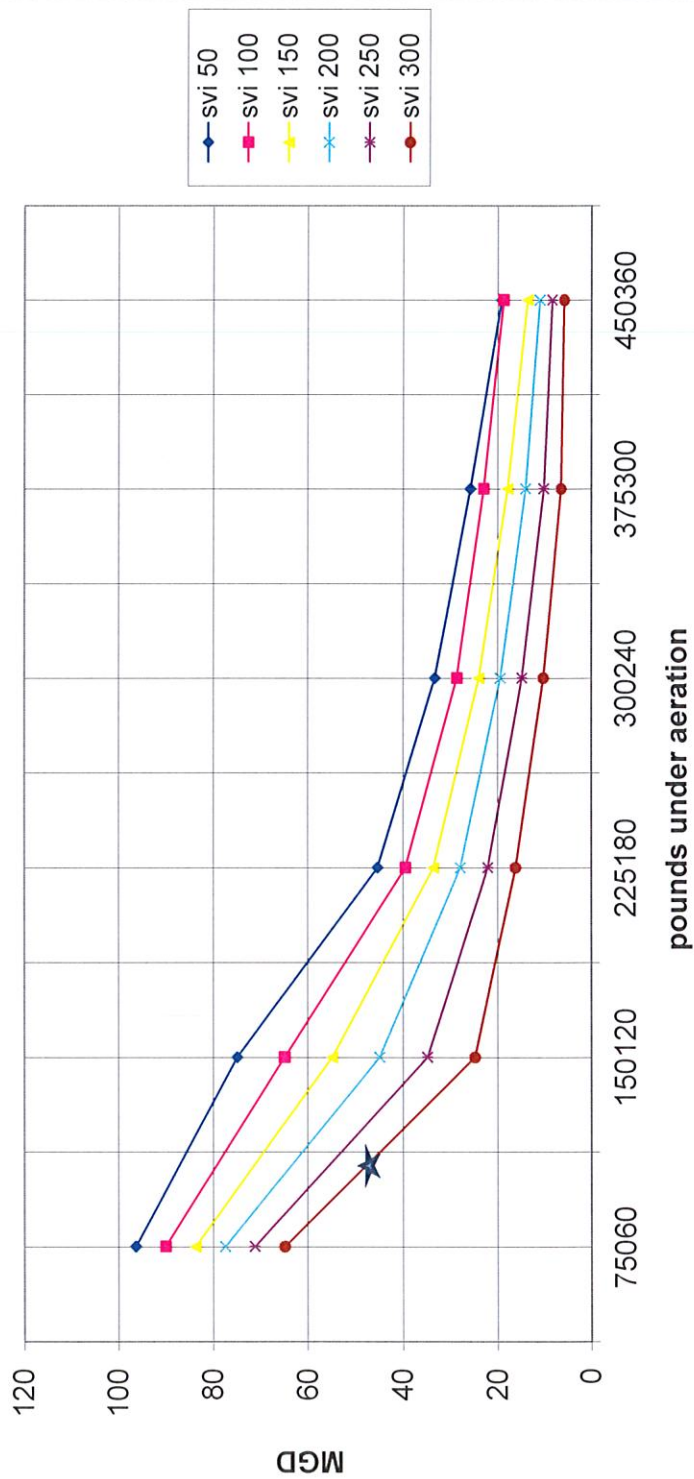

date:  
bypass start time:  
bypass stop time:

3/10/2024  
3:30 AM  
10:25 AM

Flow, MG  
60  
40

SVI  
>300

MLSS  
1555

LBS  
100,400

Sr Oper  
MB  
WA

setting selected, MG  
30

PLANT INFLUENT FLOW

CITY OF HAVERHILL, MA - WWTF

LOGIN

INF. FLOW

8.51 MGD

CSO OVERVIEW


ALARMS

10/21/2024

HISTORY MENU

MAIN MENU

7:51:24 AM

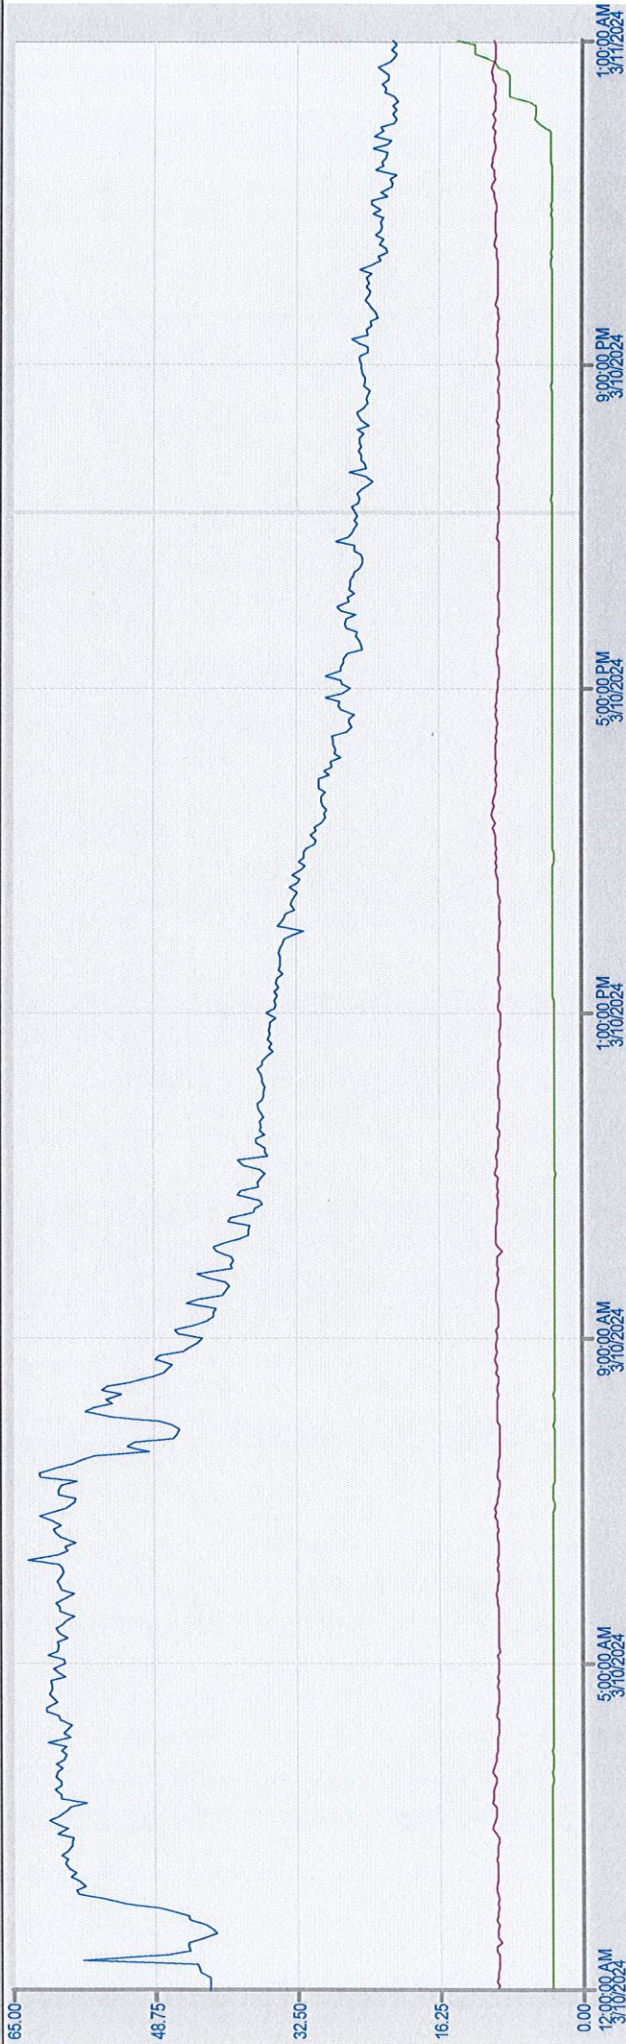

INFLUENT FLOW (F\_CV)  
SECONDARY CLARIFIER 1 SLUDGE BLANKET (F\_CV)  
SECONDARY CLARIFIER 2 SLUDGE BLANKET (F\_CV)  
SECONDARY CLARIFIER 3 SLUDGE BLANKET (F\_CV)

DESCRIPTION

TAG

UNITS

MIN

MAX

VALUE

AVG

Ack	Time In	Date In	Description	Value	Status
	07:25:51.806	10/21/2024	DAF 1 LOW AIR PRESSURE	NORMAL	CFN
	20:56:06.382	10/20/2024	AERATION TRAIN 2 INFLUENT DO HIGH	NORMAL	CFN
	19:54:43.971	10/20/2024	LOWER SIPHON DRY GATE POS DEVIATION	OS DEVIATION	CFN
	10:20:10.859	10/20/2024	BLENDED SLUDGE TANK HIGH LEVEL	ALARM	CFN
	15:23:44.524	10/19/2024	PRIMARY SYSTEM COMMON ALARM	ON	CFN
	15:39:25.271	10/17/2024	SOD. HYPO TANK 2 LOW ALARM	LOW	CFN

1 YEAR

3 MONTHS

1 MONTH

1 WEEK

1 DAY

8 HR

4 HR

1 HR

15 MIN

Set to Current Time

Set Starting Time

Total Alarms: 23

Filter: Off

Sort: Time In, Descending

Shelved: False

Run



BYPASS MULTI TREND

CITY OF HAVERHILL, MA - WWTF

LOGIN

INF. FLOW

8.36 MGD

CSO OVERVIEW


ALARMS

10/21/2024

HISTORY MENU

MAIN MENU

7:52:42 AM

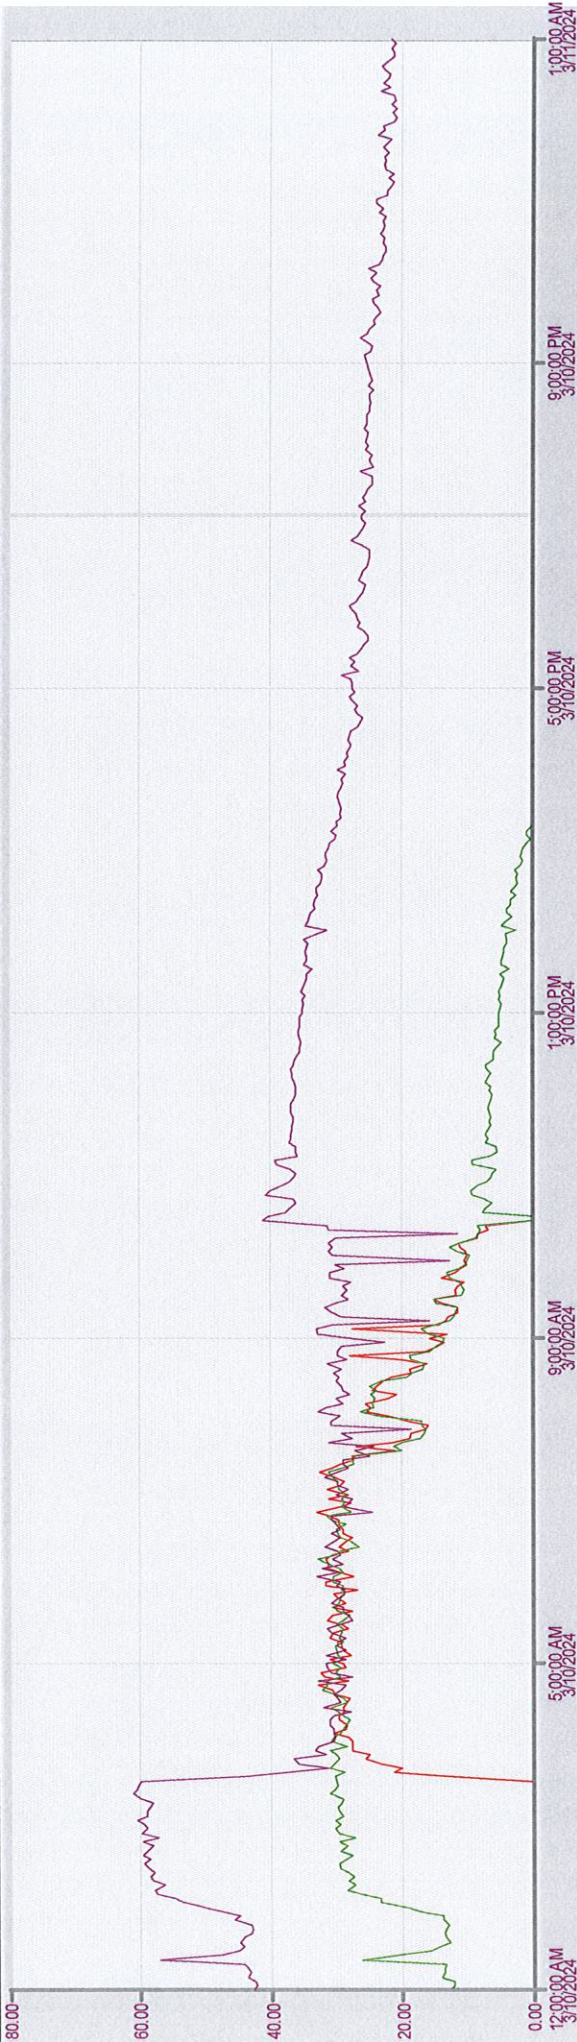

SECONDARY FLOW RATE (F\_CV)  
BYPASS FLOW (F\_CV)  
BYPASS FLOW AUTO SP (F\_CV)  
BYPASS CHLORINE (F\_CV)

VALUE	MAX	MIN	AVG
26.17	61.01	11.41	MGD
0.00	33.11	0.00	MGD
0.00	32.95	0.00	MGD
0.00	0.00	0.00	PPM

DESCRIPTION

Set to Current Time

Set Starting Time

15 MIN

1 HR

4 HR

8 HR

1 DAY

1 WEEK

1 MONTH

3 MONTHS

1 YEAR



Ack	Time In	Date In	Description	Value	Status
	07:25:51.806	10/21/2024	DAF 1 LOW AIR PRESSURE	NORMAL	CFN
	20:56:06.382	10/20/2024	AERATION TRAIN 2 INFLUENT DO HIGH	NORMAL	CFN
✓	19:54:43.971	10/20/2024	LOWER SIPHON DRY GATE POS DEVIATION	OS DEVIATION	CFN
✓	10:20:10.859	10/20/2024	BLENDED SLUDGE TANK HIGH LEVEL	ALARM	CFN
✓	15:23:44.524	10/19/2024	PRIMARY SYSTEM COMMON ALARM	ON	CFN
✓	15:39:25.271	10/17/2024	SOD. HYPO TANK 2 LOW ALARM	LOW	CFN
Total Alarms: 23					
			Sort: Time In, Descending	Shelved: False	Run



Septage Snow

Q, tot	Recd	Rainfall	Melt	Q, byp	Q, sec	Actual Setpt	Graph Setpt	TRC	3cal	MLSS	MLSS	MLSS	Sec EffSec Eff	SVI	SVI	SVI	ec lbs asec lbs at #of AT # of SST
MGD	GPD	ins.	yes/no	MGD	MGD	Byp set, MG	Byp set, MG	mg/l	'100m	AT #1	AT #2	AT #3	OD, mgSS, mgAT #1	AT #2	AT #3	AT #3	DB methods formul on line on line
03/01/24	9.47 13,000		Yes	0.00	9.47	30.0		0.22	<1	3,016	2,190	2,164		298	365	393	122,296 92,199
03/02/24	13.63 5,000		Yes	0.00	13.63	30.0		0.22									
03/03/24	19.70 0	1.26		0.00	19.70	30.0		0.35					20.44 8.00				
03/04/24	12.05 12,500			0.00	12.05	30.0		0.24	1	2,724	1,986	1,884	8.01 4.20	316	342	345	114,867 82,491
03/05/24	13.34 15,700	0.02	Yes	0.00	13.34	30.0		0.29	4	2,558	1,734	1,704	9.41 5.00	336	438	464	112,607 75,010
03/06/24	13.07 25,500	0.22	Yes	0.00	13.07	30.0		0.28	1	2,482	1,692	1,696	9.43 4.20	351	390	425	110,707 73,434
03/07/24	33.58 0	1.43	Yes	0.00	33.58	30.0		0.27	628	1,094	716	664	22.39 6.40	356	279	301	133,528 30,950
03/08/24	17.78 41,500	0.18	Yes	0.00	17.78	30.0		0.27	24	1,938	1,338	1,390		382	366	381	100,369 58,372
03/09/24	16.65 0			0.00	16.65	30.0		0.24									
03/10/24	38.53 0	1.20		6.72	31.79	30.0	activated	0.35					19.01 9.80				
03/11/24	21.23 15,000	0.13		0.00	21.23	30.0		0.37	5	1,874	1,334	1,268	7.56 5.20	422	405	442	123,292 55,995
03/12/24	18.76 22,500		Yes	0.00	18.76	30.0		0.29	84	2,078	1,462	1,352	6.98 6.00	399	410	473	128,549 61,199
03/13/24	16.98 12,200		Yes	0.00	16.98	30.0		0.29	1	2,110	1,490	1,424	8.48 4.40	403	456	492	119,794 62,850
03/14/24	15.54 32,500		Yes	0.00	15.54	30.0		0.30	48	2,074	1,510	1,480	9.00 3.80	376	437	453	107,664 63,351
03/15/24	15.54 27,500	0.01		0.00	15.54	30.0		0.24	<1	2,160	1,614	1,612		403	372	403	115,736 67,379
03/16/24	14.04 4,000	0.10		0.00	14.04	30.0		0.20									
03/17/24	13.92 0			0.00	13.92	30.0		0.18					10.74 4.00				
03/18/24	13.30 38,750			0.00	13.30	30.0		0.35	<1	2,476	1,754	1,698	15.35 5.20	355	433	453	112,098 74,159
03/19/24	12.95 35,000			0.00	12.95	30.0		0.41	2	2,572	1,866	1,738	17.30 5.20	338	370	455	118,782 77,262
03/20/24	12.71 35,300			0.00	12.71	30.0		0.28	10	2,562	1,862	1,758	19.37 6.20	343	365	438	113,392 77,337
03/21/24	12.19 28,750	0.01		0.00	12.19	30.0		0.32	1	2,586	1,910	1,796	18.82 5.40	321	408	445	117,129 78,713
03/22/24	11.78 28,500			0.00	11.78	30.0		0.31	41	2,686	1,924	1,824		328	390	482	109,272 80,489
03/23/24	32.29 4,000	0.03		0.00	32.29	30.0		0.36									
03/24/24	23.00 0	2.17	Yes	0.00	23.00	30.0		0.50					10.75 7.80				
03/25/24	17.87 22,000			0.00	17.87	30.0		0.43	1	2,402	1,634	1,630	18.28 7.00	337	398	417	111,753 70,882
03/26/24	16.93 11,000		Yes	0.00	16.93	30.0		0.38	5	2,346	1,670	1,490	12.41 6.20	341	287	336	107,016 68,880
03/27/24	16.68 35,500	0.03	Yes	0.00	16.68	30.0		0.33	2	2,168	1,656	1,544	15.35 5.80	383	417	415	98,892 67,154
03/28/24	32.64 31,500	0.26	Yes	0.00	32.64	30.0		0.34	<1	1,570	1,080	1,060	16.34 8.60	369	333	311	121,259 46,412
03/29/24	35.53 36,000	1.59	Yes	0.00	35.53	30.0		0.46	23	1,364	890	820		308	247	280	133,322 38,456
03/30/24	23.43 18,500	0.25	Yes	0.00	23.43	30.0		0.32									
03/31/24	20.00 0	0.01		0.00	20.00	30.0		0.34					10.44 4.60				
Average	18.87							0.31	5	2,230	1,586	1,524	13.61 5.86	356	377	410	115,825 66,808
Minimum	9.47							0.18									
Maximum	38.53							0.50									

100,000 for 2ats 2ssts

125,000 for 2ats 3ssts

150,000 for 3ats 3ssts

rainfall amounts are for a 24 hour period ending at 7am of the day that the amount is recorded comment added on 5-13-14 by fgh



# HAVERHILL, MA - WWTP - DAILY LOG

Date: 05/30/24

1st Kevin Rutledge  
2nd Mark Brasier  
3rd Schena/Alce

Primary Operator: Mark Brasier  
Centrifuge Operator: Brett Robart  
Secondary Operator: Brett Robart

WEATHER: Hi: 77 Lo: 57 Ob:  
Rain: Snow:  
Conditions: Cloudy snowco

LAB Ken Jones

PRIMARY SCUM LEVEL: SCREENINGS CARTS:

INFLUENT	Q,Daily Total	MAX	MIN	Old	New	Plant	Pump Station	Grit qty
	22.50	58.38	6.10	1st 2.86	10.22	5		0
Q,byp	start/stop times am or pm & Q		12:17 PM	2nd 2.69	10.69	5/6	1	
Q,byp Status			activated	3rd 3.06	2.72	6	1	
Q,bypa	1.39	Q to 2nd	21.11					

PLANT (\*1600) POWER

End 1st	KVA (06)	KW (06)	Centrifuge:	1525
End 2nd	KVA (06)	KW (06)	Primary:	5035
End 3rd	KVA (06)	KW (06)	Secondary:	2127
			Aeration:	7188
			Total:	14227

COLLECTOR SPEED

#1	#2	#3
1st slow	slow	slow
2nd slow	slow	slow
3rd slow	slow	slow
PSTs on-line	3	

Gravity Thickeners DOB:

	#1	#2	#1	#2
1st	2.0	1.0	na	na
2nd	2	1	\	-
3rd	2.5	0.5	n/a	n/a

CI2 vol Tank #1 Tank #2 TWAS LEVELS:

	Tank #1	Tank #2		#1	#2	#3
1st	1012		1st	8	5	5
2nd	921		2nd	13	10	9
3rd	859		3rd	10	9	8
Total	195	Gallons				

Dosage Setpoint

Effluent CI2, mg/l	1.50	Inplant	/ /
			/ /

CHEMICALS:

Sodium Hypo	8	Polymer dry	134	Polymer liq.	1959
		Hydroxide	drums	Alpha Lox 15	drums

SECONDARY SCUM:

#1	#2	#1	#2	#1	#2
6.0	7.7	6.9	3.5	7.6	5.4
RAS#	SC#	RAS#	SC#	RAS#	SC#
2.73		0.00		3.01	3.01

SECONDARY CLARIFIERS

Depth of Blankets	Daily average	DOB by Operators			
#1	#2	#3	#1	#2	#3
12.40	0.0	3.3	1st 1.0	1.5	2.0
			2nd 2.0	10.0	2.0
			3rd 4.5	3.0	7.0

12 Mid PUMP STATION (\*450) POWER

12 Mid	Start 1st	KW(06)	KVA(06)
12 Mid	Start 2nd	KW(06)	KVA(06)
12 Mid	Start 3rd	KW(06)	KVA(06)

AERATION: Dissolved Oxygen

ATs	on-line	
#1	AT#1 infl do avg	0.0
#3	AT#1 effl do avg	1.2
#4	AT#2 infl do avg	2.2
#6	AT#2 effl do avg	1.2

Weekly Septage Pumped Gals

SEPTAGE LEVEL


1st	7.37	ft
2nd		ft
3rd		ft

	CI2	Time	Q(MGD)
TRC 1	0.28	4:48 am	6.40
TRC 2	0.24	8:07 am	35.97
TRC 3	0.41	5:29 pm	13.03

CHLORINE RESIDUAL:

0.31	mg/l
------	------

# Capacity of Secondary System at 3ATs 3SSTs

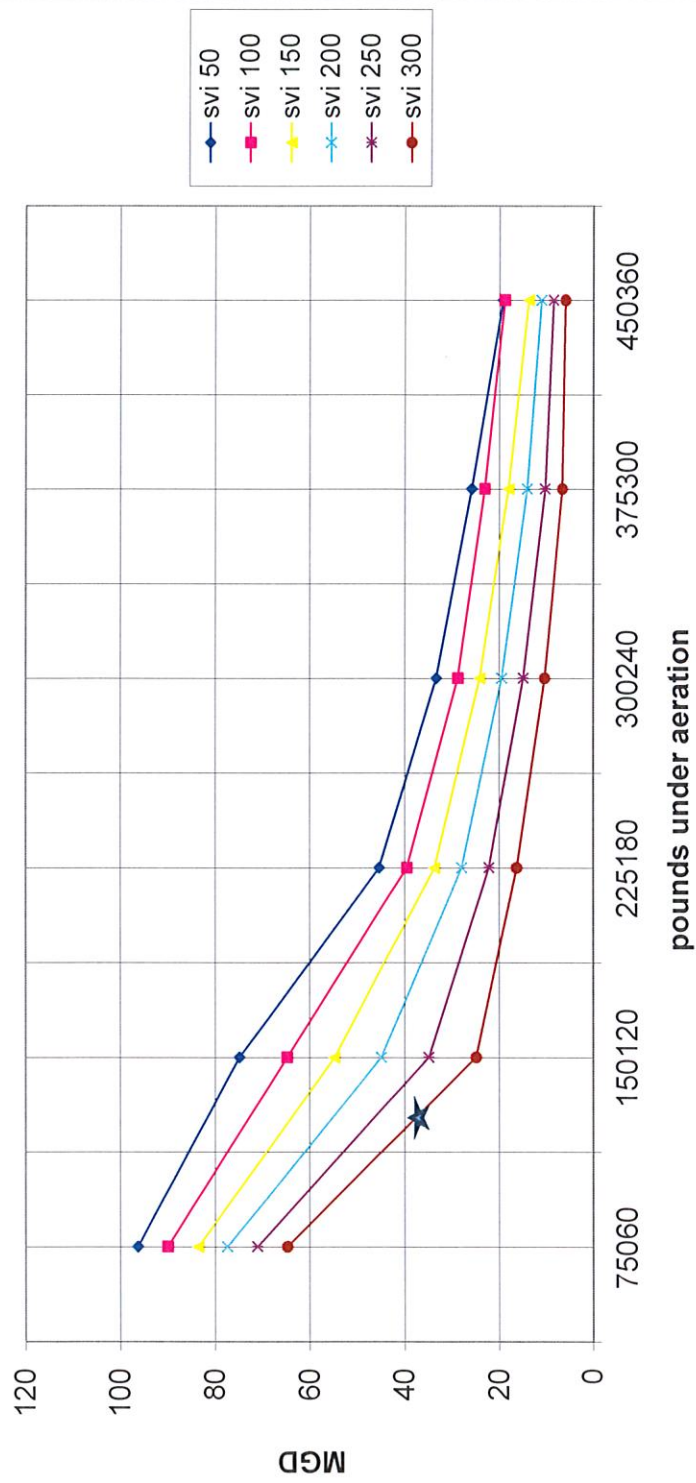

date: 5/30/2024  
 bypass start time: 12:17 PM  
 bypass stop time: 2:00 PM  
 setting selected, MG 30  
 Sr Oper MB MB  
 LBS 119,200  
 MLSS 2,350  
 SVI 294  
 Flow, MG 55 36



PLANT INFLUENT FLOW

CITY OF HAVERHILL, MA - WWTF

LOGIN

INF. FLOW

8.64 MGD

CSO OVERVIEW


ALARMS

10/21/2024

HISTORY MENU

MAIN MENU

7:51:43 AM

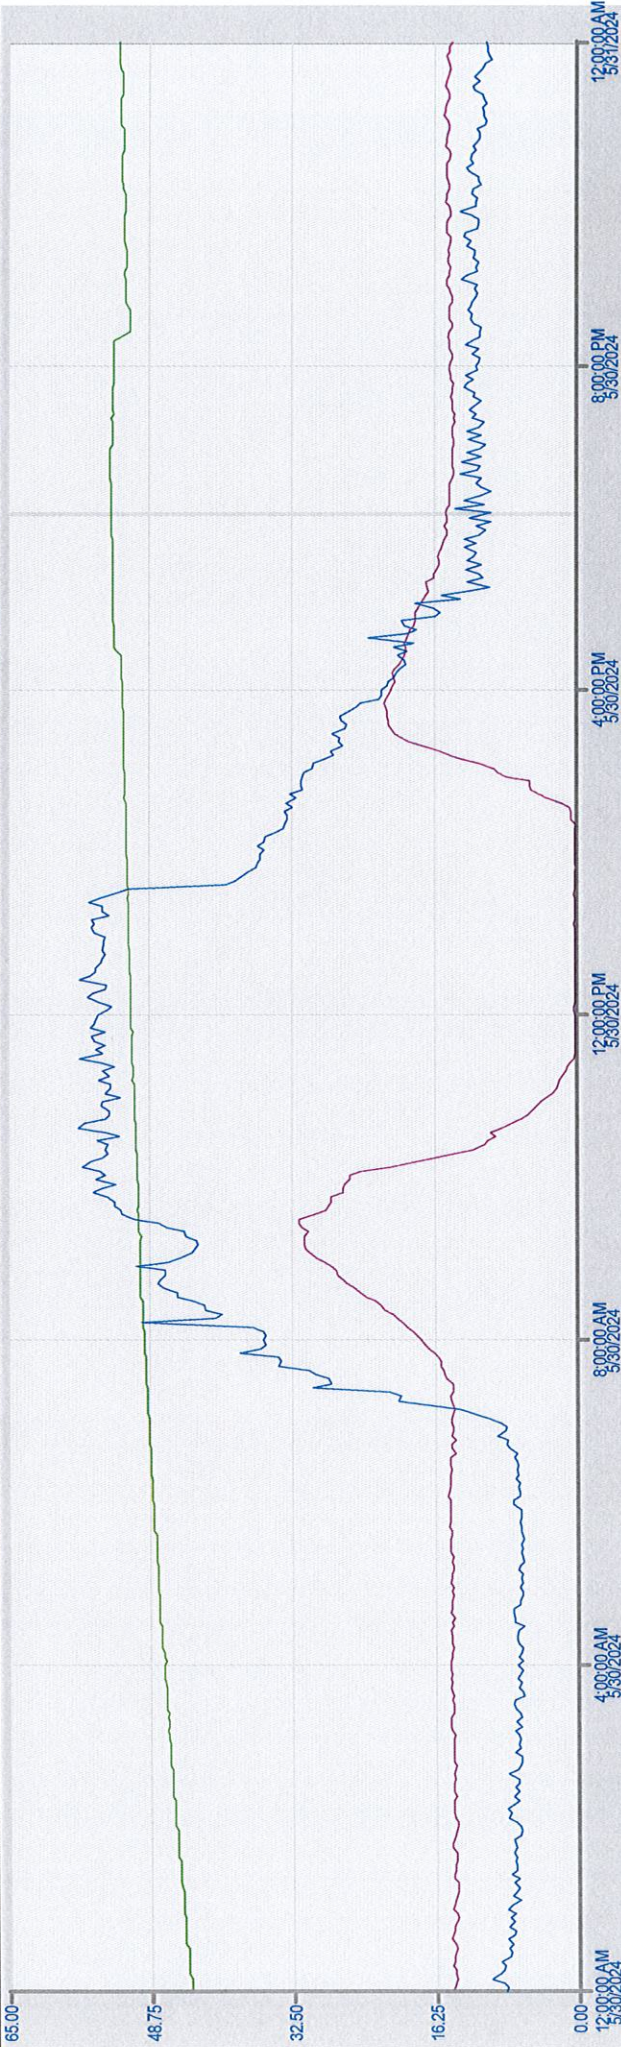

INFLUENT FLOW (F\_CV)  
SECONDARY CLARIFIER 1 SLUDGE BLANKET (F\_CV)  
SECONDARY CLARIFIER 2 SLUDGE BLANKET (F\_CV)  
SECONDARY CLARIFIER 3 SLUDGE BLANKET (F\_CV)

DESCRIPTION	VALUE	MAX	MIN	AVG	UNITS	TAG	Time In	Date In	Description	Value	Status
DAF 1 LOW AIR PRESSURE	07:25:51.806						07:25:51.806	10/21/2024	DAF 1 LOW AIR PRESSURE	NORMAL	CFN
AERATION TRAIN 2 INFLUENT DO HIGH	20:56:06.382						20:56:06.382	10/20/2024	AERATION TRAIN 2 INFLUENT DO HIGH	NORMAL	CFN
LOWER SIPHON DRY GATE POS DEVIATION	19:54:43.971						19:54:43.971	10/20/2024	LOWER SIPHON DRY GATE POS DEVIATION	OS DEVIATION	CFN
BLENDED SLUDGE TANK HIGH LEVEL	10:20:10.859						10:20:10.859	10/20/2024	BLENDED SLUDGE TANK HIGH LEVEL	ALARM	CFN
PRIMARY SYSTEM COMMON ALARM	15:23:44.524						15:23:44.524	10/19/2024	PRIMARY SYSTEM COMMON ALARM	ON	CFN
SOD. HYPO TANK 2 LOW ALARM	15:39:25.271						15:39:25.271	10/17/2024	SOD. HYPO TANK 2 LOW ALARM	LOW	CFN
Total Alarms: 23											
								Filter: Off	Sort: Time In, Descending	Shelved: False	Run

Set to Current Time

Set Starting Time

15 MIN 1 HR 4 HR 8 HR 1 DAY 1 WEEK 1 MONTH 3 MONTHS 1 YEAR



BYPASS MULTI TREND

CITY OF HAVERHILL, MA - WWTF

LOGIN

INF. FLOW

8.33 MGD

CSO OVERVIEW


ALARMS

10/21/2024

HISTORY MENU

MAIN MENU

7:52:56 AM

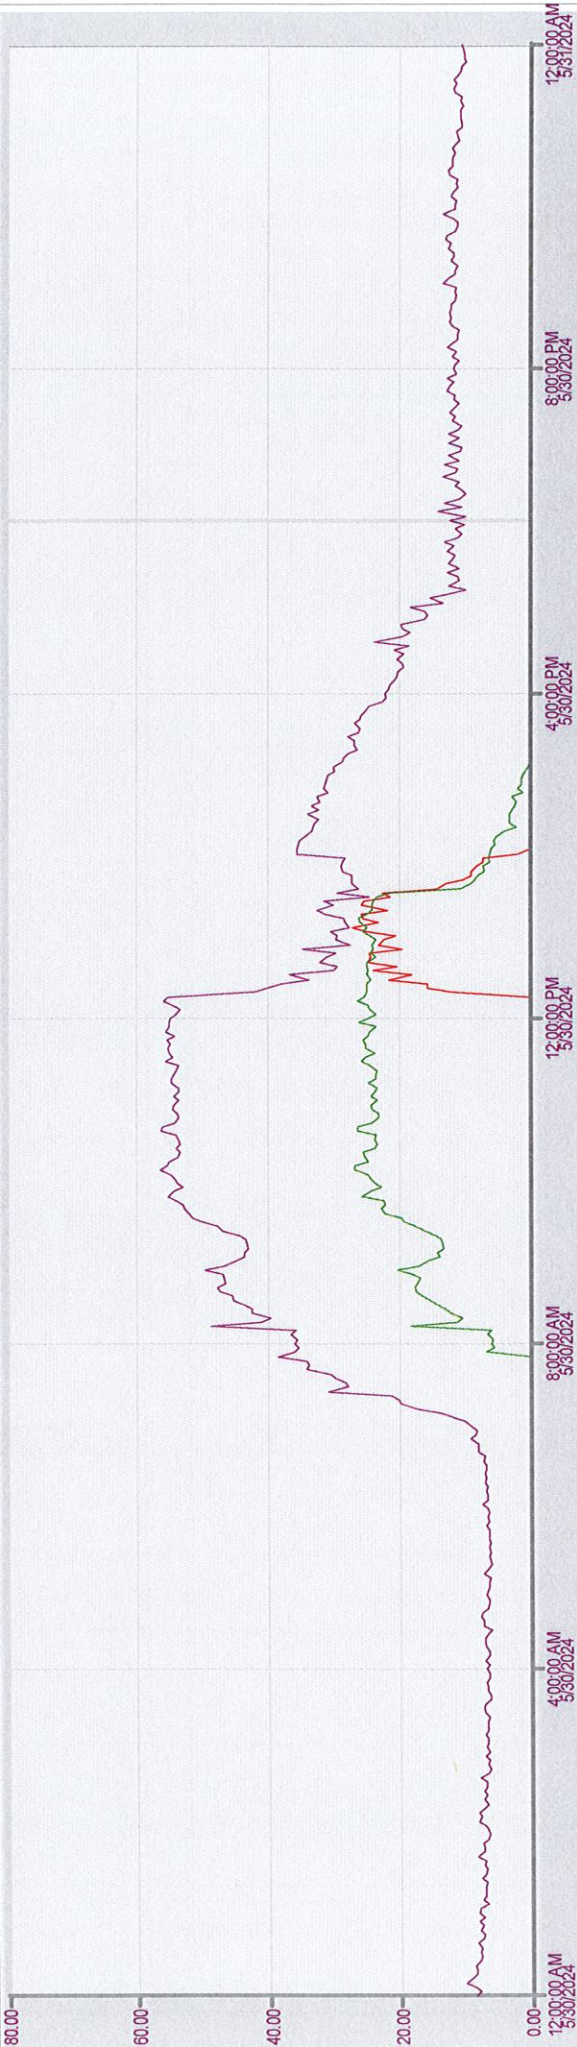

SECONDARY FLOW RATE (F\_CV)  
BYPASS FLOW (F\_CV)  
BYPASS FLOW AUTO SP (F\_CV)  
BYPASS CHLORINE (F\_CV)

	VALUE	MAX	MIN	AVG	UNITS	TAG
WWTP.WW_SCADA SECONDARY FLOW RATE.F_CV	11.85	6.08	21.18	MGD		
WWTP.WW_SCADA BYPASS FLOW.F_CV	0.00	0.00	1.36	MGD		
WWTP.WW_SCADA BYPASS FLOW AUTO SP.F_CV	0.00	0.00	5.37	MGD		
WWTP.WW_SCADA BYPASS CHLORINE.F_CV	0.00	0.00	0.00	PPM		

DESCRIPTION

Set to Current Time

Set Starting Time

15 MIN

1 HR

4 HR

8 HR

1 DAY

1 WEEK

1 MONTH

3 MONTHS

1 YEAR

Ack	Time In	Date In	Description	Value	Status
	07:25:51.806	10/21/2024	DAF 1 LOW AIR PRESSURE	NORMAL	CFN
	12:05:06.382	10/20/2024	AERATION TRAIN 2 INFLUENT DO HIGH	NORMAL	CFN
✓	19:54:43.971	10/20/2024	LOWER SIPHON DRY GATE POS DEVIATION	OS DEVIATION	CFN
✓	10:20:10.859	10/20/2024	BLENDED SLUDGE TANK HIGH LEVEL	ALARM	CFN
✓	15:23:44.524	10/19/2024	PRIMARY SYSTEM COMMON ALARM	ON	CFN
✓	15:39:25.271	10/17/2024	SOD. HYPO TANK 2 LOW ALARM	LOW	CFN
✓	15:39:25.271	10/17/2024	SOD. HYPO TANK 2 LOW ALARM	LOW	CFN

Total Alarms: 23

Filter: Off

Sort Time In: Descending

Shelve: False

Run



Septage Snow

	Q, tot	Recd	Rainfall	Melt	Q, byp	sec	Actual	Setpt	Graph	Setpt	TRC	MLSS	AT #1	MLSS	AT #2	MLSS	AT #3	Sec Eff	SVI	AT #2	SVI	AT #3	SVI	Sec lbs asec	lbs at	# of AT	# of SST
	MGD	GPD	ins.	yes/no	MGD	MGD	Byp set,	MG Byp set,	MG	Setpt	mg/l	'100m	AT #1	AT #2	AT #3	OD, mgSS,	mgAT #1	AT #1	AT #2	AT #3	AT #3	AT #3	DB	methods	formul	on line	on line
05/01/24	13.44	0	0.36		0.00	13.44	30.0				0.26	<1	2,170	1,604	1,273	19.83	7.20	415	505	621	621	621	128,567	63,138	3	3	
05/02/24	12.38	39,500	0.04		0.00	12.38	30.0				0.33	5	2,506	1,916	1,580	26.01	7.00	359	449	557	557	557	121,891	75,085	3	3	
05/03/24	11.22	10,500	0.16		0.00	11.22	30.0				0.35	<1	2,940	1,896	1,540			299	464	552	552	552	129,577	79,764	3	3	
05/04/24	10.56	5,500	0.02		0.00	10.56	30.0				0.38														3	3	
05/05/24	13.06	0			0.00	13.06	30.0				0.41					13.24	7.80								3	3	
05/06/24	11.45	26,500	0.40		0.00	11.45	30.0				0.27	<1	2,464	1,720	1,482	10.09	8.20	369	494	567	567	567	111,417	70,882	3	3	
05/07/24	10.86	31,000			0.00	10.86	30.0				0.26	3	2,470	1,942	1,598	12.67	10.40	340	350	476	476	476	116,453	75,185	3	3	
05/08/24	16.37	41,250			0.00	16.37	30.0				0.28	1	3,028	1,962	1,668	32.42	33.00	291	449	516	516	516	119,939	83,292	3	3	
05/09/24	11.40	52,500	0.57		0.00	11.40	30.0				0.35	2	2,486	1,936	1,520	19.29	9.00	354	413	520	520	520	106,091	74,334	3	3	
05/10/24	11.17	47,250			0.00	11.17	30.0				0.39	9	2,616	1,984	1,622			321	388	475	475	475	111,512	77,837	3	3	
05/11/24	10.58	17,500			0.00	10.58	30.0				0.25														3	3	
05/12/24	10.25	0			0.00	10.25	30.0				0.29					15.42	7.80								3	3	
05/13/24	10.15	61,000	0.01		0.00	10.15	30.0				0.27	8	2,738	2,174	1,928	9.35	7.80	252	258	384	384	384	106,055	85,568	3	3	
05/14/24	10.20	39,500			0.00	10.20	30.0				0.31	6	2,782	2,272	1,908	14.35	9.00	252	251	351	351	351	103,778	87,095	3	3	
05/15/24	10.05	33,000	0.01		0.00	10.05	30.0				0.28	5	2,666	2,170	1,886	19.42	9.20	244	198	313	313	313	99,349	84,092	3	3	
05/16/24	11.21	82,000	0.20		0.00	11.21	30.0				0.28	1	2,638	2,100	1,674	24.07	10.00	258	271	257	257	257	104,006	80,214	3	3	
05/17/24	9.91	52,500	0.02		0.00	9.91	30.0				0.30	2	2,846	2,242	1,922			249	227	234	234	234	106,483	87,695	3	3	
05/18/24	10.10	10,500			0.00	10.10	30.0				0.17														3	3	
05/19/24	9.65	0	0.18		0.00	9.65	30.0				0.27					19.55	10.20								3	3	
05/20/24	9.53	53,000	0.06		0.00	9.53	30.0				0.30	<1	3,132	2,298	2,072	11.64	9.80	252	265	343	343	343	113,823	93,850	3	3	
05/21/24	11.93	47,500			0.00	11.93	30.0				0.24	9	3,030	2,304	2,060	16.08	13.60	267	273	325	325	325	110,957	92,499	3	3	
05/22/24	9.46	24,500	0.21		0.00	9.46	30.0				0.26	5	2,994	2,358	1,974	22.35	8.80	264	237	289	289	289	110,136	91,648	3	3	
05/23/24	9.26	43,500			0.00	9.26	30.0				0.38	1	2,706	2,370	2,006	22.81	10.00	292	245	234	234	234	104,814	88,596	3	3	
05/24/24	8.84	30,000			0.00	8.84	30.0				0.29	6	3,294	2,336	1,946			219	248	262	262	262	111,916	94,776	3	3	
05/25/24	8.15	0			0.00	8.15	30.0				0.21														3	3	
05/26/24	8.58	0	0.13		0.00	8.58	30.0				0.29					11.77	10.00								3	3	
05/27/24	9.37	0	0.11		0.00	9.37	30.0				0.29	<1	2,924	2,340	2,092	12.29	8.80	263	274	306	306	306	112,120	92,024	3	3	
05/28/24	11.46	40,500	0.45		0.00	11.46	30.0				0.34	4	2,774	1,994	1,798	17.33	15.00	267	266	289	289	289	119,921	82,141	3	3	
05/29/24	8.49	41,500			0.00	8.49	30.0				0.27	11	3,096	2,266	2,144	15.78	12.40	291	287	326	326	326	126,666	93,900	3	3	
05/30/24	22.50	32,000			1.37	21.11	30.0		activated		0.31	150	2,892	2,174	1,988	17.81	13.80	294	294	332	332	332	119,210	88,246	3	3	
05/31/24	9.87	34,000	1.38		0.00	9.87	30.0				0.27	<1	2,998	2,150	1,886			270	260	323	323	323	125,901	87,995	3	3	
Average	11.01										0.30	3	2,791	2,109	1,807	17.44	10.85	291	320	385	385	385	113,938	83,907			

100,000 for 2ats 2ssts  
125,000 for 2ats 3ssts  
150,000 for 3ats 3ssts

rainfall amounts are for a 24 hour period ending at 7am of the day that the amount is recorded comment added on 5-13-14 by fgh



# APPENDIX D

CMMS WORK ORDERS FOR BASEMENT SEWER BACKUP



**Work Order 17213**  
**SSO- Private Backup**

**Cityworks**  
**Status: COMPLETE**

**Priority:**

**Category: CM**

**Submit To: Marinez, Samuel**

**Initiated By:** Rosario, Pedro

**Date:** 1/15/2024 3:22:00PM

**Requested By:** Marinez, Samuel

**Supervisor:**

**Submit to Date:** 1/15/2024 3:36:25PM

**Projected Start:** 1/15/2024 3:22:00PM

**Projected Finish:** 1/15/2024 3:22:00PM

**Opened By:** Marinez, Samuel

**Date:** 2/21/2024 6:52:32AM

**Closed By:** Marinez, Samuel

**Date:**

**Completed By:** Rosario, Pedro

**Actual Start:**

**Actual Finish:** 1/15/2024 3:35:42PM

**Stage:** ACTUAL

**Expense Type:** MAINT

**Comments:**

Comments

On 1-14-2024 Received a call from Sam stating that Water Department called in, Sewer is coming in to basement, upon arrival we checked City Line and was running fine, but we got the Jet Truck and flushed and was a partial blockage in the line, released and stopped the sewer coming in to the house, after investigating the rain leader was going in to sewer line, we have to camara the main to see the condition due to is only 1 manhole on Lockwood St.

Date

Author

1/15/2024 3:36:27P Rosario, Pedro

**Assets:**

<u>Type</u>	<u>Uid</u>	<u>FACILITY ID</u>	<u>Location</u>
MASTER ADDRESS TABLE	76 SOUTH PROSPECT ST	709-672-9	

**Instructions:**



Work Order    17539  
SSO- Private Backup

Cityworks  
Status: CLOSED

Priority: 1    Category: CM    Submit To: Marinez, Samuel

Initiated By: Marinez, Samuel    Date: 2/4/2024    1:15:43PM

Requested By: Marinez, Samuel    Supervisor: Lewis, Isaiah

Submit to Date: 2/4/2024    1:15:43PM

Projected Start: 2/4/2024    1:15:43PM    Projected Finish: 2/4/2024    1:15:43PM

Opened By: Marinez, Samuel    Date: 2/4/2024    2:16:54PM

Closed By: Marinez, Samuel    Date: 2/4/2024    2:24:15PM

Completed By:

Actual Start:    Actual Finish: 2/4/2024    2:15:32PM

Stage: ACTUAL    Expense Type: MAINT

Comments:

Comments	Date	Author
NO OVERFLOW INTO THE STREET. SEWERAGE CONTAINED IN BASEMENT PIT. HOME HAS PARTIAL BLOCKAGE. HOMEOWNER CALLING A PLUMBER.	2/4/2024    2:19:43PM	Marinez, Samuel
CHECKED CITY MAIN, RUNNING FREELY.	2/4/2024    2:23:53PM	Marinez, Samuel

Assets:

Type	Uid	FACILITY ID	Location
MASTER ADDRESS TABLE	56 SOUTH WILLIAMS ST	742-4-84	

Instructions:



Work Order    18204  
SSO- Private Backup

Cityworks  
Status: CLOSED

Priority: 1    Category: CM    Submit To: Marinez, Samuel

Initiated By: Day, Zebulun	Date: 3/14/2024 12:51:00PM
Requested By: Marinez, Samuel	Supervisor: Lewis, Isaiah
Projected Start: 3/14/2024 12:51:00PM	Submit to Date: 3/14/2024 12:56:39PM
Opened By: Marinez, Samuel	Projected Finish: 3/14/2024 12:51:00PM
Closed By: Marinez, Samuel	Date: 3/17/2024 8:53:50AM
Completed By: Day, Zebulun	Date: 3/17/2024 8:55:07AM
Actual Start: 3/12/2024 12:56:00PM	Actual Finish: 3/12/2024 1:56:00PM
Stage: ACTUAL	Expense Type: MAINT

Comments:		
<u>Comments</u>	<u>Date</u>	<u>Author</u>
Homeowner had an issue with his sewer line and wish to have the city line checked out in front of his house	3/14/2024 12:56:41F	Day, Zebulun
Arriving at the sewer call we found that there had been a little surcharge in the basement due to the homeowners line blocked up. Advised homeowner to call a plumber to have his line relieved of the issue.	3/14/2024 12:56:41F	Day, Zebulun

<b>Assets:</b>			
<u>Type</u>	<u>Uid</u>	<u>FACILITY ID</u>	<u>Location</u>
MASTER ADDRESS TABLE	244 BROADWAY	531-384-2	

Instructions:
---------------



Work Order    18383  
SSO- Private Backup

Cityworks  
Status: COMPLETE

Priority: 1    Category: CM    Submit To: Marinez, Samuel

Initiated By: Day, Zebulun    Date: 3/22/2024 10:40:00AM

Requested By: Marinez, Samuel    Supervisor: Lewis, Isaiah

Submit to Date: 3/22/2024 10:46:10AM

Projected Start: 3/22/2024 10:40:00AM    Projected Finish: 3/22/2024 10:40:00AM

Opened By:    Date:

Closed By: Marinez, Samuel    Date:

Completed By: Day, Zebulun

Actual Start: 3/21/2024 3:44:00PM    Actual Finish: 3/21/2024 4:44:00PM

Stage: ACTUAL    Expense Type: MAINT

Comments:

<u>Comments</u> Resident at number 32 Allen St., Joseph Young called the plant to report a blockage in his pipe and wished to have the city line checked for any backup. Arriving at the call we found that the city line was running properly in without issue, we entered the basement to find the house pit and lateral was backed up but contained to the pit in the basement. Advise the homeowner to call a plumber to rectify the house issue.	<table border="0"><tr><td><u>Date</u></td><td><u>Author</u></td></tr><tr><td>3/22/2024 10:46:12</td><td>Day, Zebulun</td></tr></table>	<u>Date</u>	<u>Author</u>	3/22/2024 10:46:12	Day, Zebulun
<u>Date</u>	<u>Author</u>				
3/22/2024 10:46:12	Day, Zebulun				

Assets:

<u>Type</u>	<u>Uid</u>	<u>FACILITY_ID</u>	<u>Location</u>
MASTER ADDRESS TABLE	32 ALLEN ST	719-665-3	

Instructions:




# APPENDIX E

CCTV INSPECTION MAP



# City of Haverhill CCTV Inspections

*Sewer and drain inspections done through our "5 year inspection program" and "in house" from fall of 2022 to present.*

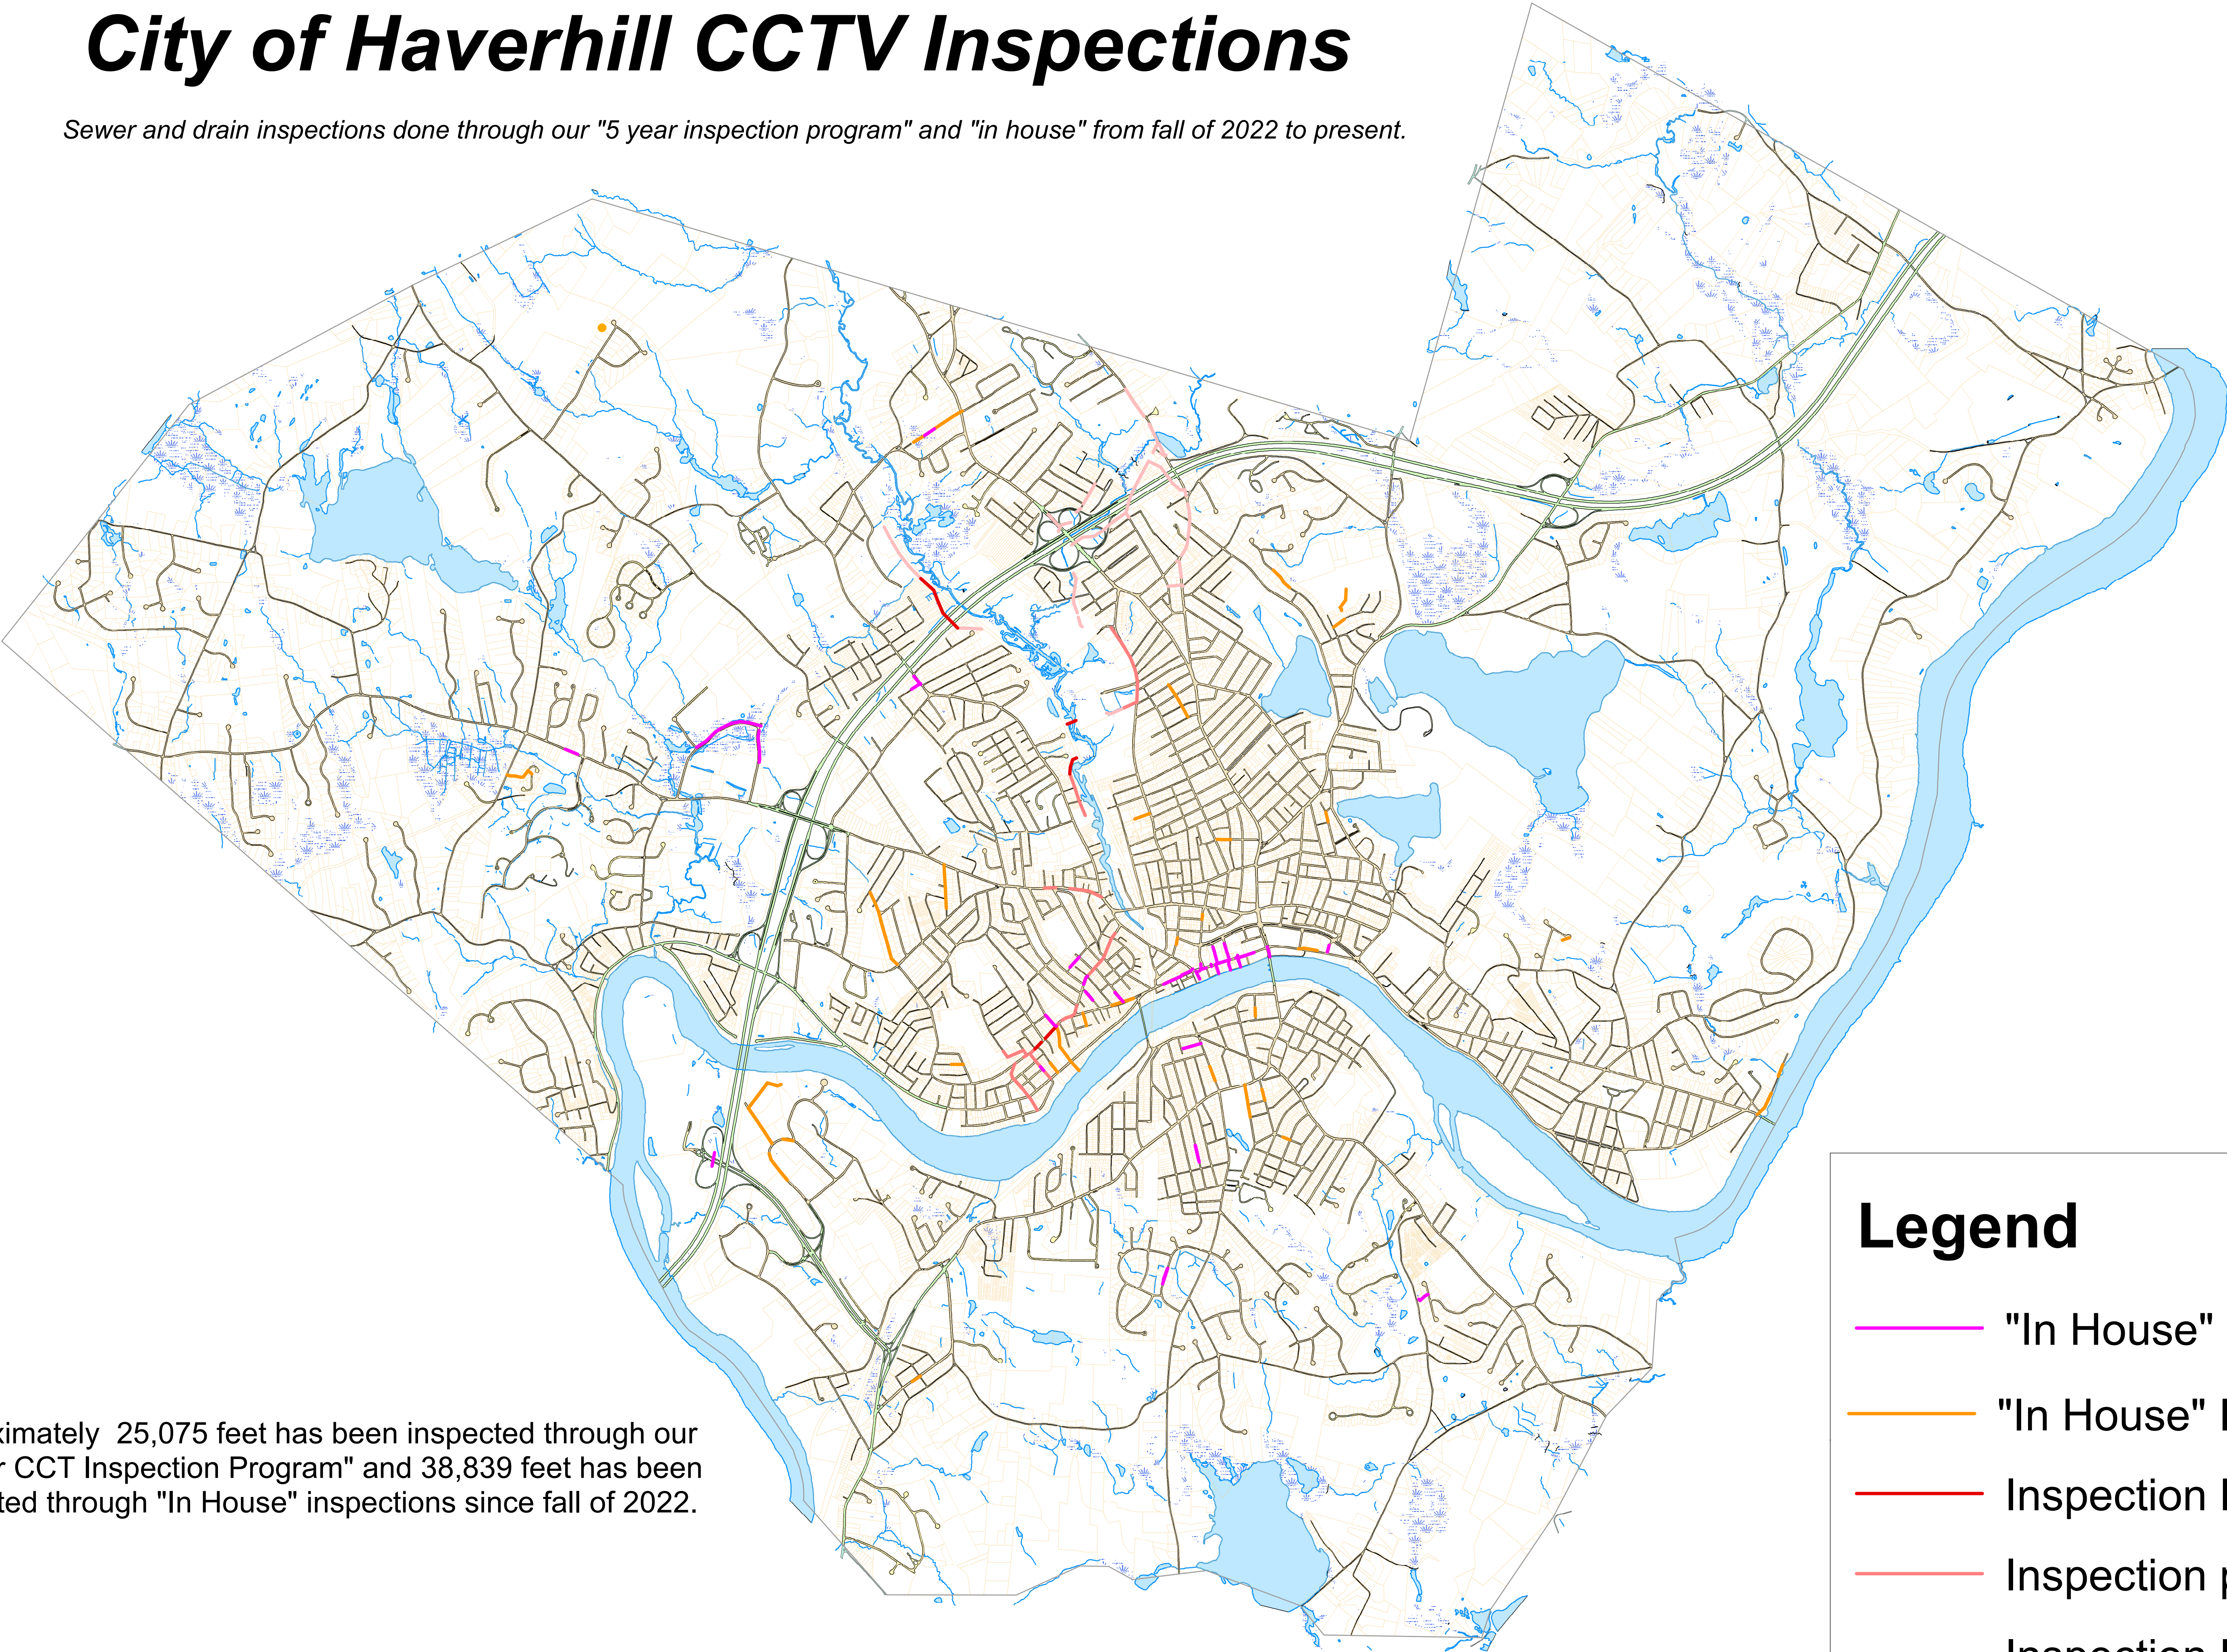

Approximately 25,075 feet has been inspected through our "5 Year CCT Inspection Program" and 38,839 feet has been inspected through "In House" inspections since fall of 2022.

## Legend

- "In House" Inspection 2024
- "In House" Inspection 2023
- Inspection Program 2024
- Inspection program 2023
- Inspection Program 2022